

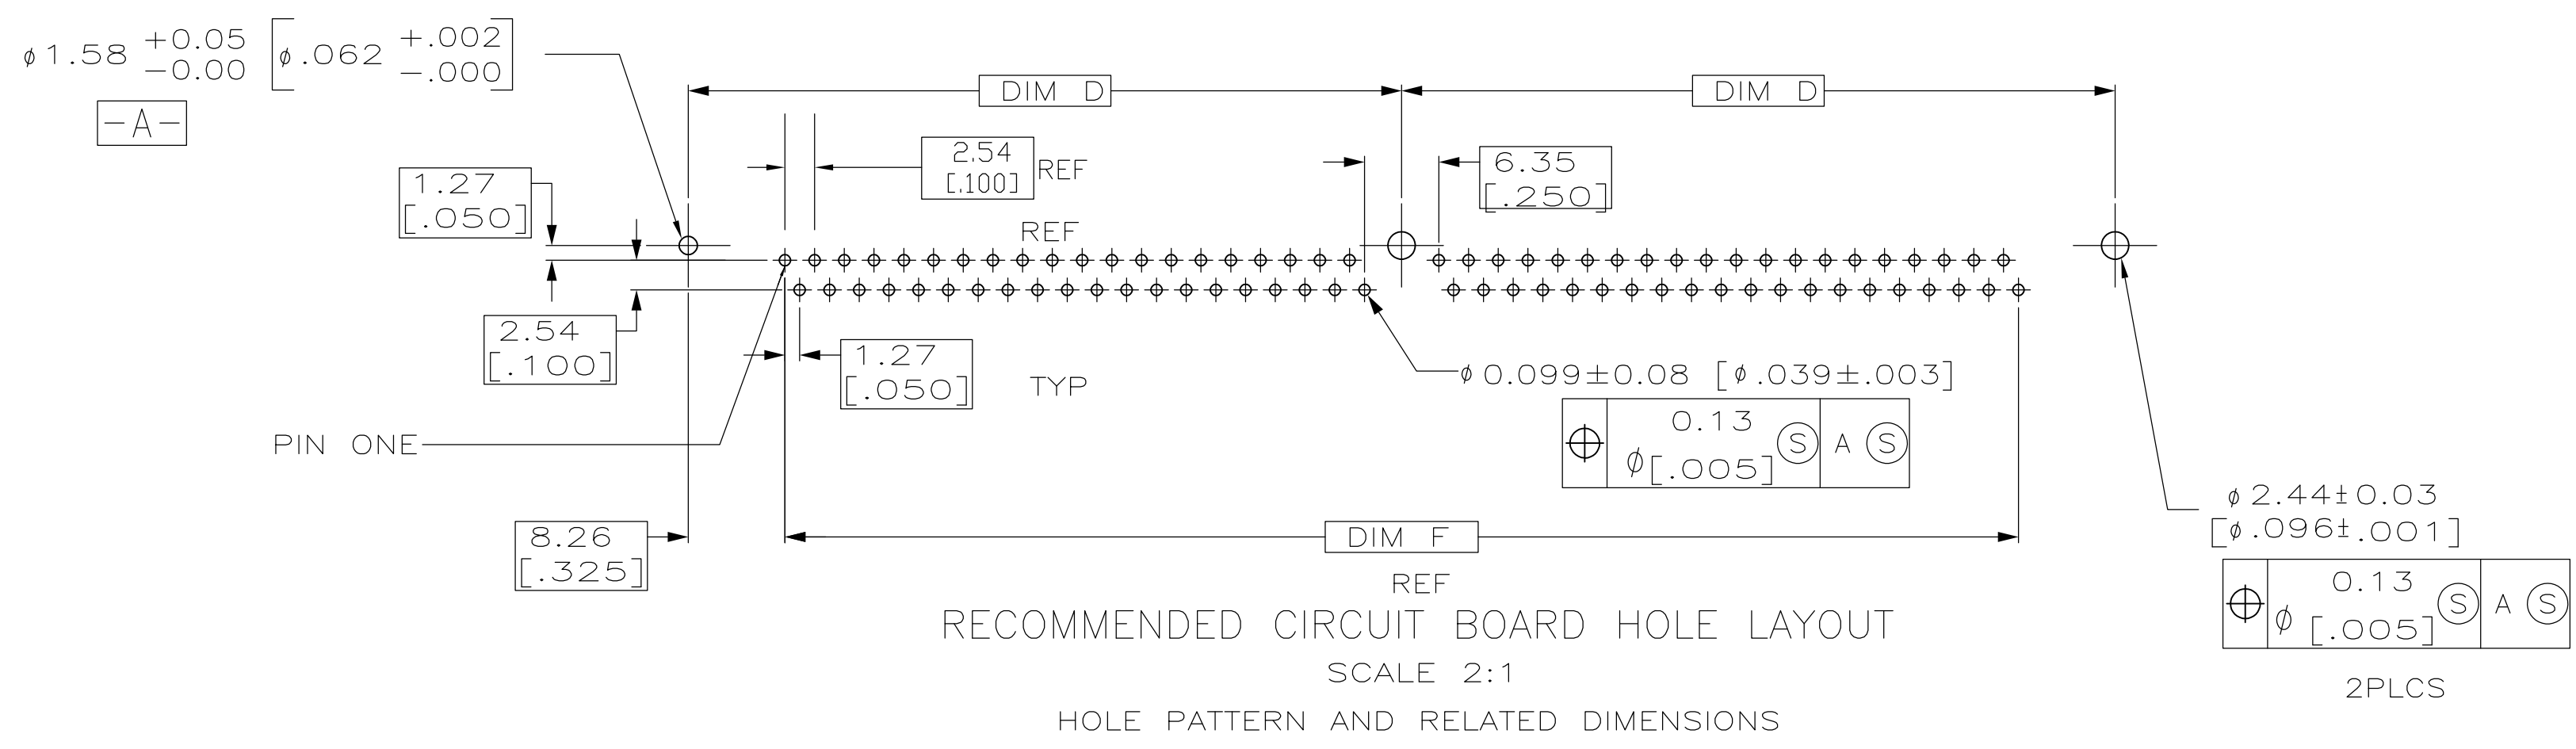


SECTION W-W  
SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: WENKE HE 29MAR05	TE Connectivity
		CHK: STEVEN YAO 29MAR05	
DIMENSIONS: mm(INCHES)		APVD: TENOMOTO 29MAR05	NAME: SIMM II RTANG
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC: -	1.27 [.050] CL ASSY
0 PLC ± -		APPLICATION SPEC: -	4.06 [.160] HEIGHT
1 PLC ± -		WEIGHT: -	SIZE: A1
2 PLC ± -		FINISH: -	CAGE CODE: 00779
3 PLC ± .127(.005)		SCALE: 4:1	DRAWING NO: C=5382483
4 PLC ± -		SHEET: 1 OF 2	REV: A1
ANGLES ± -		CUSTOMER DRAWING	

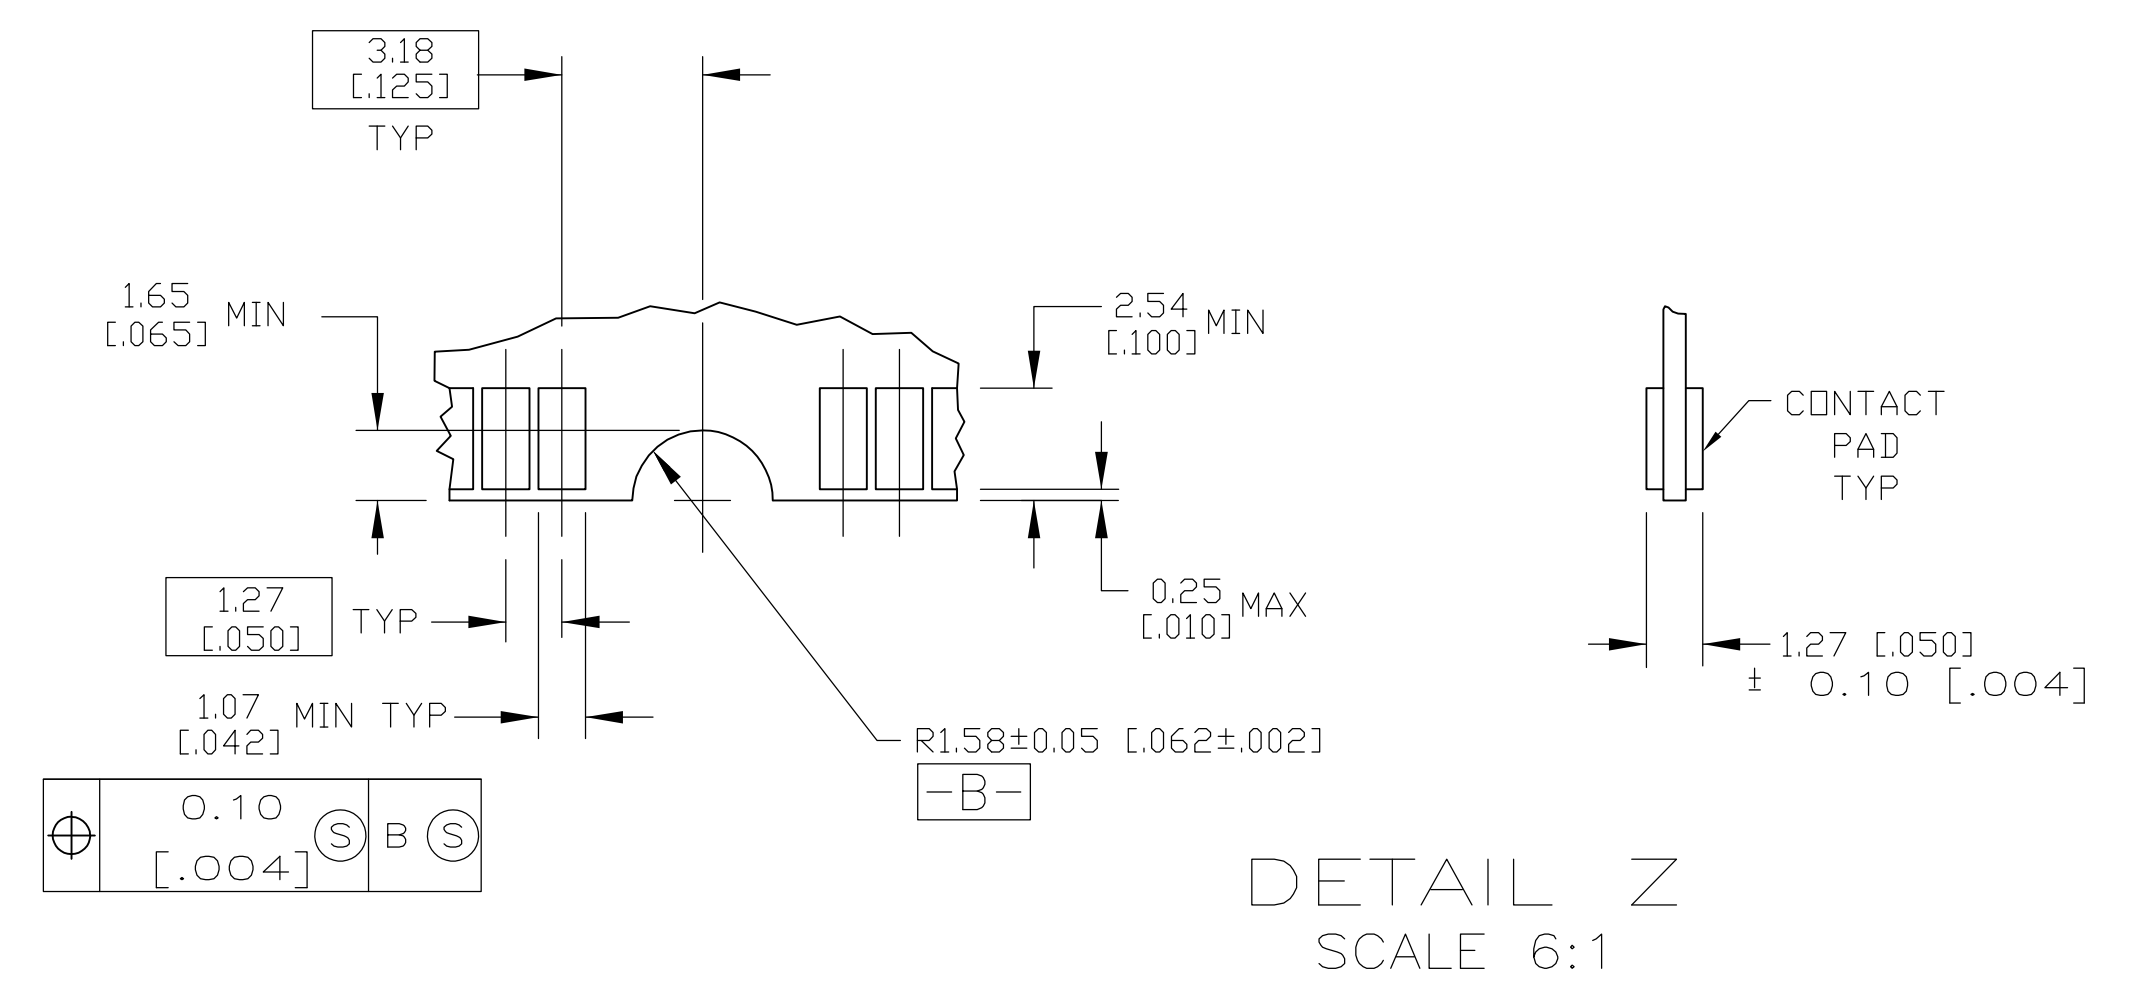

- 1 FOR OPTIMUM PERFORMANCE, CONTACT PAD PLATING SHOULD BE SMOOTH AND FLAT. COPPER CONTACT PADS ARE TO BE OVERPLATED WITH .00127[.000050] MIN THK NICKEL FOLLOWED WITH 0.00101[.000040] MIN THK GOLD PLATING.
- 2 CONTACT MATING AREA:  
0.00076 [.000030] MIN THICK GOLD.  
SOLDERTAIL:  
0.00005[.000002] MIN THK GOLD.  
UNDERPLATE:  
0.00127[.000050] MIN THK NICKEL OVER ENTIRE CONTACT.

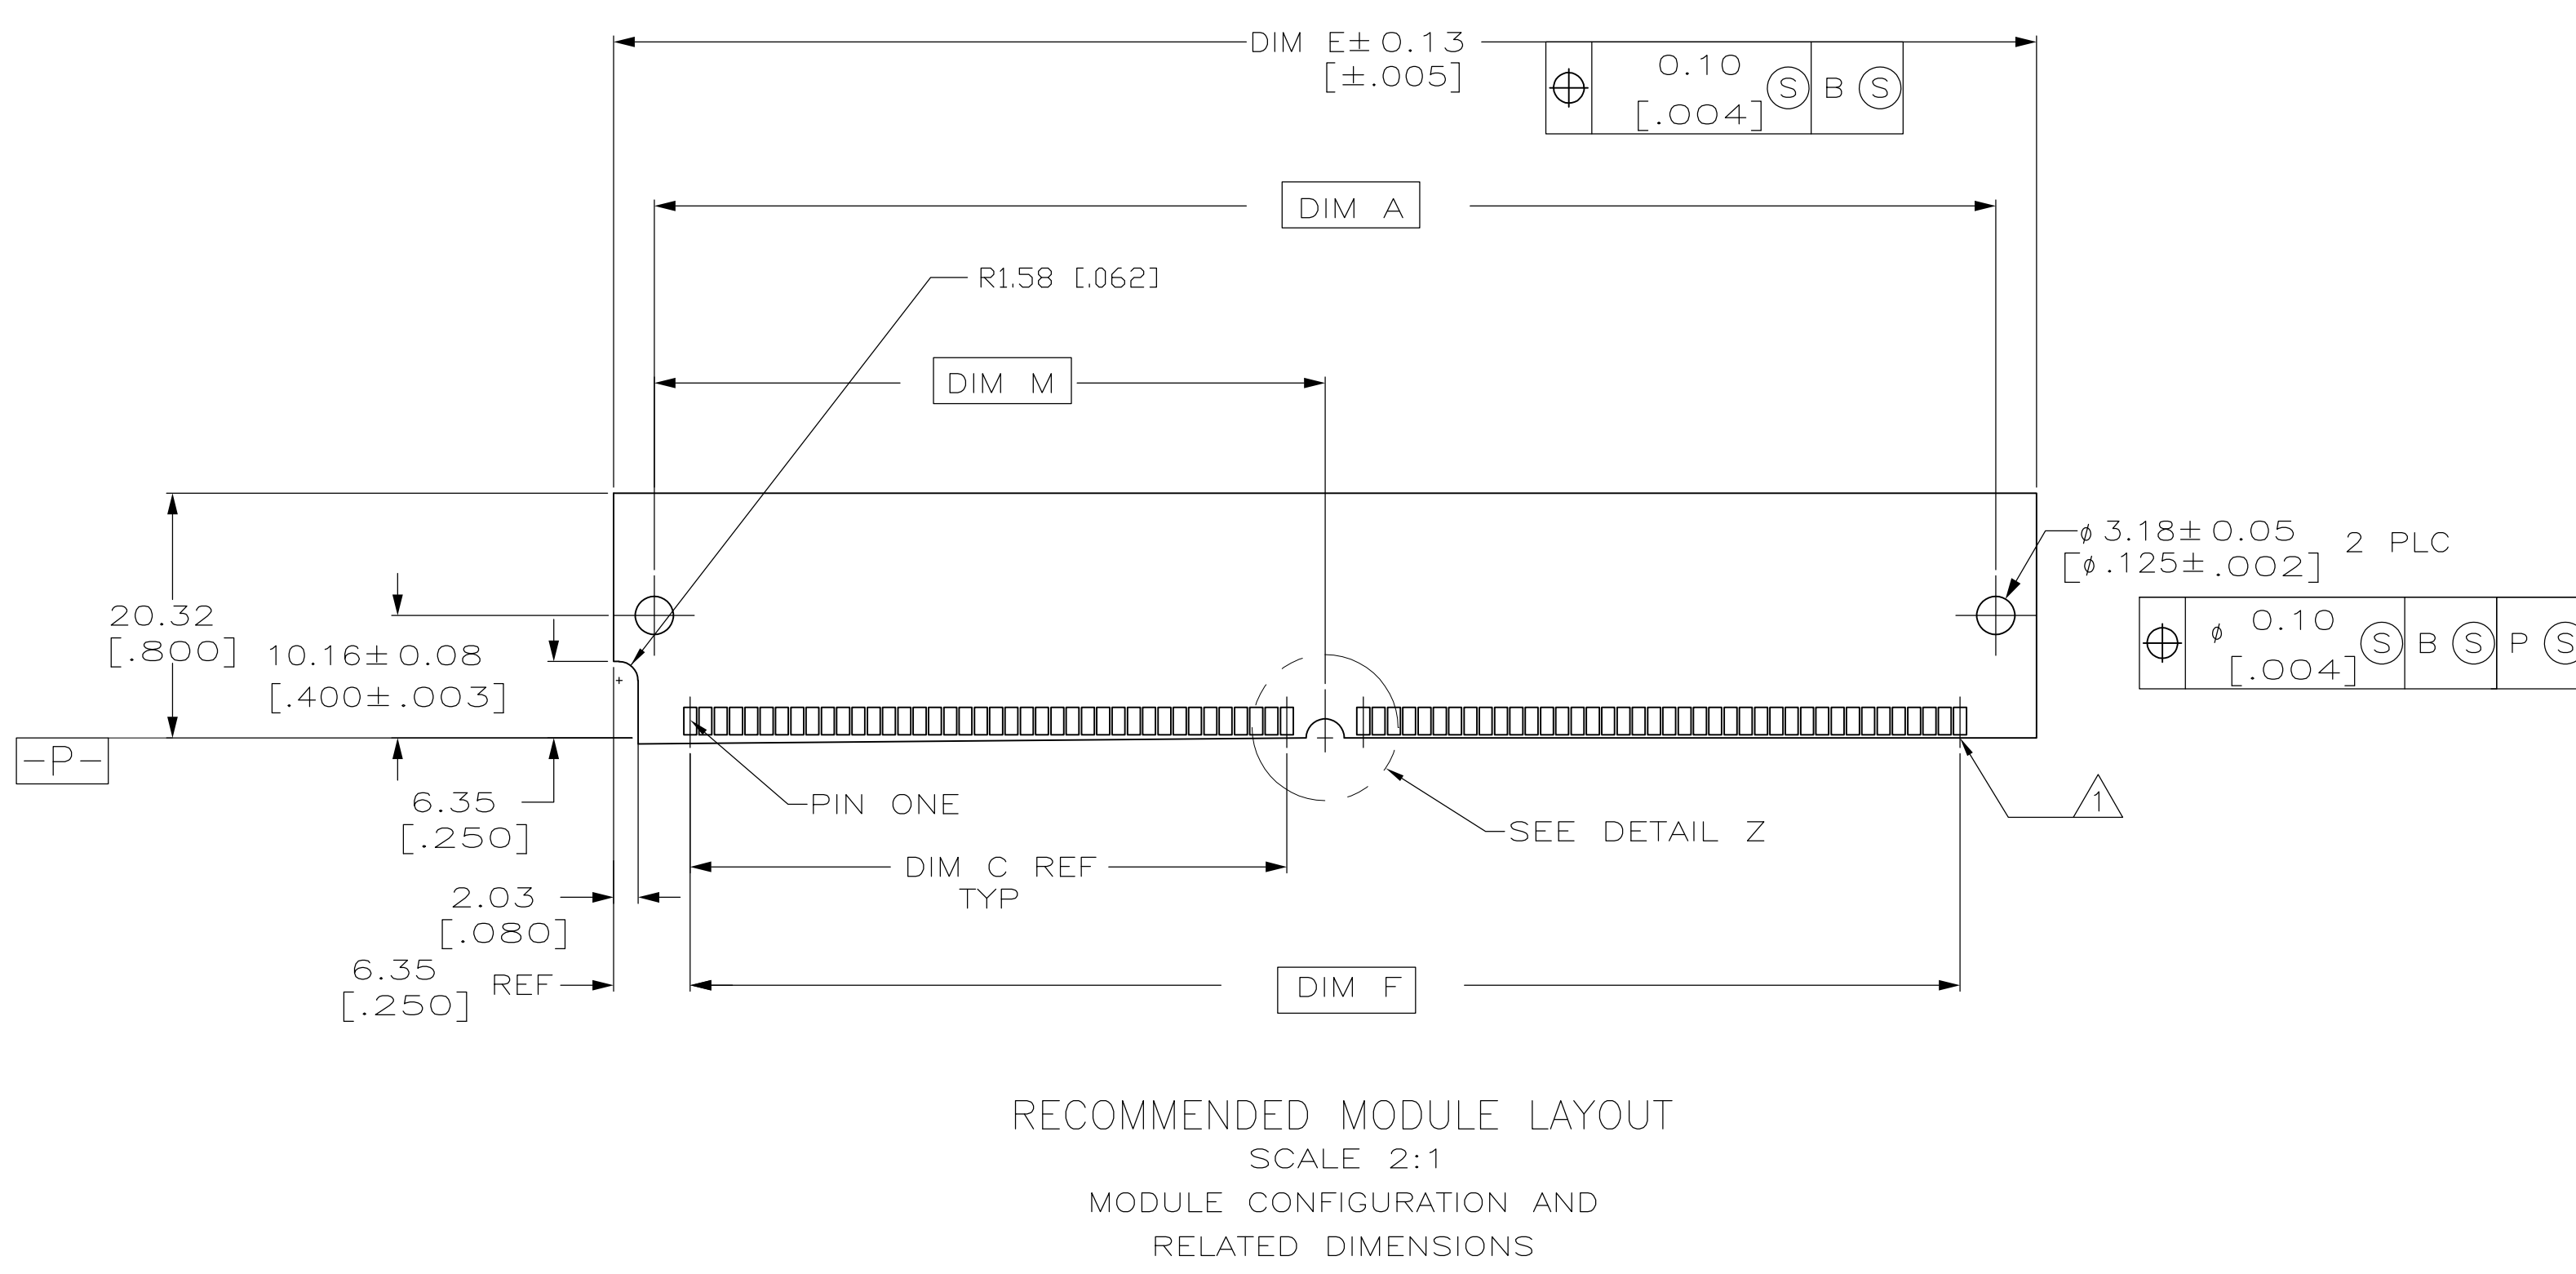

50.60[1.992]	111.76[4.400]	95.25[3.750]	107.95[4.250]	55.88[2.200]	44.45[1.750]	115.57[4.550]	101.19[3.984]	72	7-5382483-2
DIM M	DIM J	DIM F	DIM E	DIM D	DIM C	DIM B	DIM A	POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN WENKE HE 29MAR05		CHK STEVEN YAO 29MAR05		APVD TENOMOTO 29MAR05		NAME	
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
0 PLC ± -		1 PLC ± -		2 PLC ± -		3 PLC ± 0.13[.005]		A1 00779 C=5382483	
4 PLC ± -		ANGLES ± -		MATERIAL		FINISH		WEIGHT	
				CUSTOMER DRAWING		SCALE 4:1		SHEET 2 OF 2 REV A1	

