


RECOMMENDED PC BOARD LAYOUT

REV	DATE	APPD	DESCRIPTION
1	08/07/92		REV 8 REDRAWN PER ECN 806505

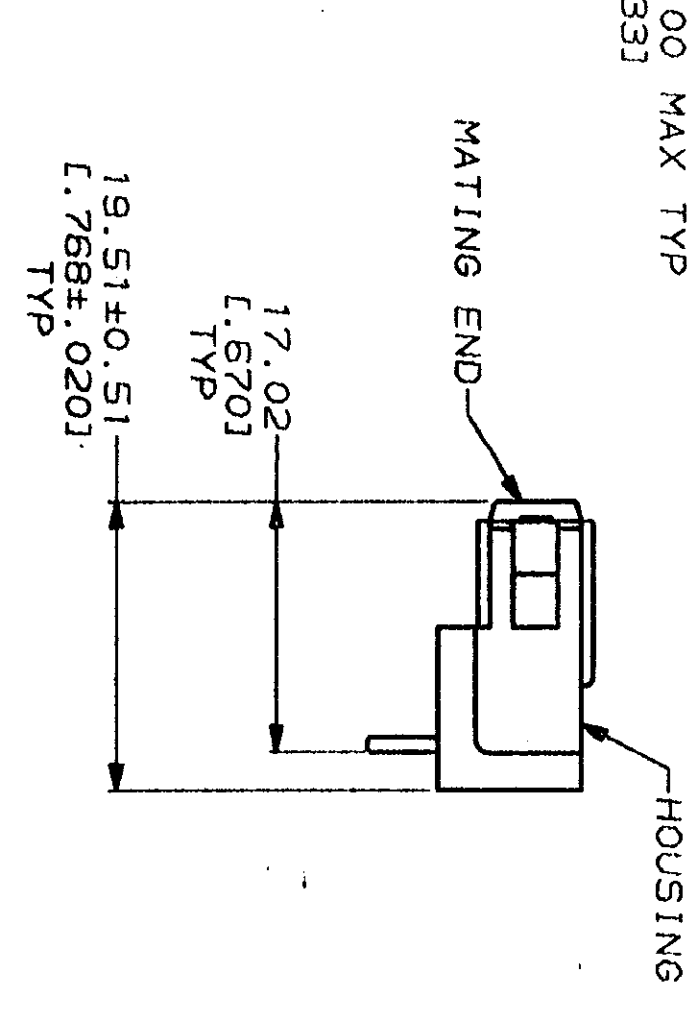

1 3.81µm [0.000150] MIN TIN-LEAD OVER 0.76µm [0.000030] MIN NICKEL.
 2 0.76µm [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [0.200] MIN FROM MATING END, 3.81µm [0.000150] MIN TIN-LEAD FOR A LENGTH OF 5.23 [0.206] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [0.000050] MIN NICKEL.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN MM (INCHES) TOLERANCES ON: 2 PLC DEC ± 0.25 [0.010] 3 PLC DEC ± ANGLES MATERIAL HOUSING: NYLON, RED CONTACTS: PH BRZ FINISH CONTACTS, SEE TABLE	DR 08/07/92 L.SIPE CHK 8-11-92 J.McCLINTON APPD 8-12-92 A.TRAVIS APPD 8-12-92 C.RHODE PRODUCT SPEC 108-10033 APPLICATION SPEC	NAME SOCKET HEADER ASSEMBLY, 16 POSN, IN-LINE, METRIMATE
AMP	AMP Incorporated Harrisburg, PA 17105-3608	
SCALE 2:1	SIZE CAGE CODE DRAWING NO 00779 207614	207614-3 207614-1 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROL LINE INDICATES THE CURRENT REVISION. THIS DRAWING IS THE PROPERTY OF AMP INCORPORATED AND SHOULD BE CONTROLLED FOR THE LATEST REVISION.

CUSTOMER DRAWING