

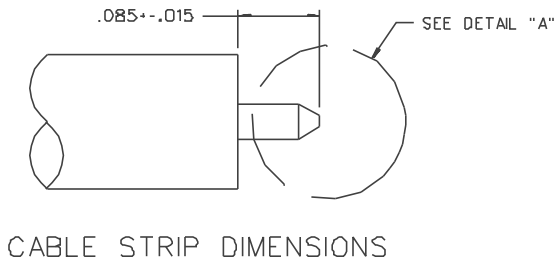


PART NUMBER	ITEM ① BODY	ITEM ② NUT	ITEM ③ GASKET
142-0694-011	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	NONE
142-0694-013	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	SILICONE RUBBER
142-0694-016	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	NONE
142-0694-017	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	SILICONE RUBBER

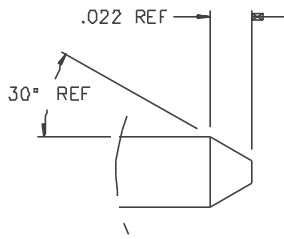

CABLE STRIP DIMENSIONS

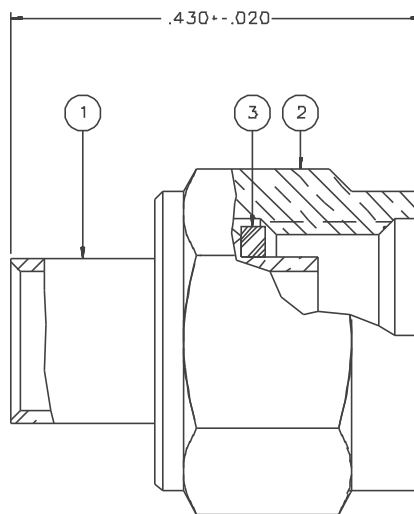

DETAIL "A"

20:1

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
FREQUENCY RANGE: 0-18 GHZ  
VSWR: 1.035+.005F MAX (F IN GHZ)

WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL  
DIELECTRIC WITHSTANDING VOLTAGE: NOT APPLICABLE  
INSULATION RESISTANCE: NOT APPLICABLE  
CONTACT RESISTANCE:

CENTER CONTACT - INITIAL NOT APPLICABLE  
AFTER ENVIRONMENTAL NOT APPLICABLE  
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX  
AFTER ENVIRONMENTAL NOT APPLICABLE

BODY TO CABLE - 0.5 MILLIOHM MAX  
CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET  
INSERTION LOSS: .03 ✓ F MAX (F IN GHZ) AT 15.5 TO 18 GHZ  
RF LEAKAGE: -60 DB MIN AT 2 TO 3 GHZ  
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 670 VRMS MIN AT 5 TO 7.5 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX  
MATING TORQUE: 7-10 INCH POUNDS  
COUPLING PROOF TORQUE: 15 INCH-POUNDS MIN  
COUPLING NUT RETENTION: 6D LBS. MIN  
CONTACT RETENTION: NOT APPLICABLE  
CABLE ACCEPTABILITY: RG 402, DIA .141 SEMIRIGID  
CABLE HEX CRIMP SIZE: NOT APPLICABLE  
CABLE RETENTION: 6D LBS MIN AXIAL FORCE  
55 INCH-OUNCE MIN TORQUE  
DURABILITY: 100 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012)  
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT 115 DEG C HIGH TEMP  
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C  
CORROSION: MIL-STD-202, METHOD 101, CONDITION B  
SHOCK: MIL-STD-202, METHOD 213, CONDITION I  
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D  
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

DRAWING NO. C - 142-0694-011/020			
0 REVISIONS			
ENGINEERING RELEASE			
01	11-22-88	E J R A W	12-01-88 ECO 23720
ADDED: .430+-.020, .321+-.010.			
02	04-10-89	E J R A W	4-12-89 ECO 23943
CHANGED: 335 VRMS WAS 500 VRMS 250 VOLTS WAS 375 VOLTS, -60 DB WAS -90 DB, 870 VRMS WAS 1000 VRMS, 100 CYCLES WAS 500 CYCLES. ADDED: "AT 15.5 TO 18 GHZ", "60 LBS MIN", "EXCEPT 115 DEG C HIGH TEMP", "MOISTURE RESISTANCE: MIL-STD-202, METHOD 106" DELETED: .321+-.010			
03	11-19-90	R H B A	11-26-90 ECO 24975
ADDED: P/N'S 142-0694-013 AND 142-0694-017, ITEM 3			
***** * REVISION NUMBER FOLLOWED BY AN ALPHA * * CHARACTER INDICATES DRAWING CLASS * * GATION OR PART NUMBER ADDITION ONLY * *****			
30	10-21-99	R H B A	ECN 46782

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED  
PER ANS Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY E J	DATE 3-10-87	Johnson Components 299 Johnson Ave. P.O. Box 1732 Waseca, MN 56093-0832	
DECIMALS	mm	CHECKED BY	DATE	TITLE PLUG ASSEMBLY, STRAIGHT CABLED THREAD ON NUT SMA, RG 402	
.XXX		APPROVED BY TAK	DATE 11-22-88	CODE NO.	DRAWING NO. C - 142-0694-011/020
MATL		APPROVED BY RJB	DATE 11-28-88	SCALE 10:1	U/W INCH SHEET 2 OF 2
FINISH		RELEASE DATE	12-1-88		