
工	۵	П	т	0





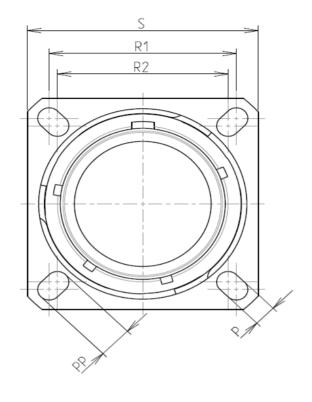

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours

: 11.64 g ± 10%

8D 0

G

11

F

02

А

F

А

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


**ORIENTATION : A** 

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-02

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

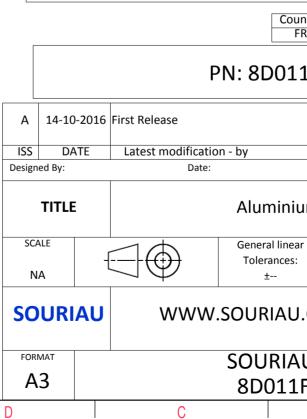

σ		А			
				4	
AS EXAMPLE				3	
any non-conformin which does not co or of the Parties or I ndation, technical n untry Jurisc	mply with by a third par			2	
1F02AA					
	CUSTOME	R DRAWING	MOD N°		
um Receptac					
ar :	NPRDS / PROJECT 859				
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° F02AA-C			SHEET		
B		A		J	

ſ	т	G		П	m	D	0	
		Contact Layout					Panel	l Cutou
4	 0. (2.	+Y IB IA +Y +X +X 95 (2.4imm)				22	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement size no. 11 -2	ion X-axis Y-axis (mm) (mm) + .095 (2.41) +.000 (.00) 095 (2.41) +.000 (.00)	Contact location All			V	Dim	
ω							ØA ØAA R1 ØT	
	+						SOURIAU shall not be liable due to a use of the Produ the Specifications issued by ei (professional recomn	ucts wh ither of nendat
N							PN: 8D0	Countr FR D11F
						A 14-10-2 ISS DATI Designed By:	D16 First Release Latest modification - by Date:	
-						SCALE NA	Alumi General li Tolerand ±	inear
						SOURIA		
		1			1	FORMAT A3	SOUR 8D01	
	Н	G		F	E \	D	C I	

