<b>T</b>	G	т	m	D	0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		
-Salt Spray	: 500 hours		

: 11.83 g ± 10%

8D 0

G

11

W

04

А

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-04



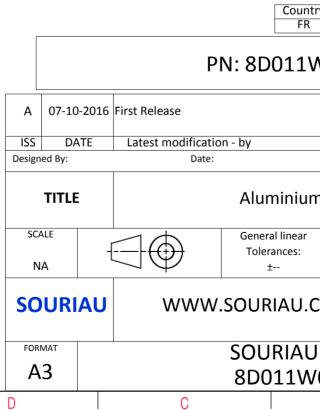

σ	>	>		
			4	
S EXAMPLE			3	
any non-conformit which does not co er of the Parties or I idation, technical n intry Jurisc R LWO4AN	mply with by a third party		2	
		MOD N°		
	CUSTOMER DRAWING	1		
um Receptac	m Receptacle 8D series			
ar	NPRDS / PROJECT 859			
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission			
U DRG N°	1	SHEET		
W04AN-C	A	1/2	J	
5	1			

_	Ŧ	۵	п –	m	D	0	
		Contact Layout				Panel Cut	tou
4	-×	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont 11 -4 4	X-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)	]			ØI ØA	
co						Dim ØA ØAA R1 ØT	
	F					SOURIAU shall not be liable for a due to a use of the Products the Specifications issued by either (professional recommend	wh r of
N						Cour	ntr R
					A 07-10-20 ISS DATE Designed By:	016 First Release	
					SCALE	Aluminiu General linear	r
-					NA SOURIA	U WWW.SOURIAU	
					FORMAT A3	SOURIA 8D011V	
	Н	l G	l F	E \	D	C I	

