Ŧ	۵	п –	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours -Mass : 19.49 g ± 10%

8D 0

G

13

F

04

В


F

Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

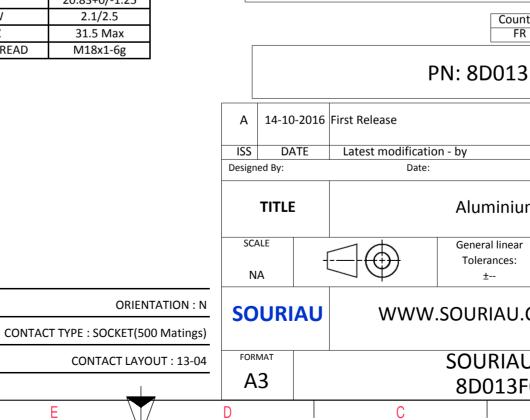

	Φ		A		
ſ					4
AS EXAMP	LE				3
s which do er of the P	pes not co Parties or H echnical n Jurisc	ty or damage mply with by a third part otice.) liction & Cont Not Listed			2
				MOD N°	
		CUSTOME	R DRAWING		
um Re	n Receptacle 8D series				
ar			' PROJECT 59		1
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DR				SHEET	
04D	B		A	_,_	J

-	т	۵	וד	m	D	0	
		Contact Layout					Panel Cutout
4		X D D D D D D D D			٨	SQUARE FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
	Cont positio A B C D Shell Arrangement N size no. 13 -4	(Insert arrangement 13-4) Location tact X			2		
cى						\$	Dim ØA ØAA R1 ØT
	-					SOURIAU shall not l due to a use of t	
						the Specifications issu	
N						PN	FR : 8D013F
					A 14-10-20 ISS DATE Designed By:	16 First Release Latest modification - Date:	ру
					TITLE		Aluminium
<u> </u>					NA		General linear Tolerances: ±
					FORMAT		OURIAU.CO
			-	- 1	A3	1	8D013F0
	Н	G	F	E	D	C	

