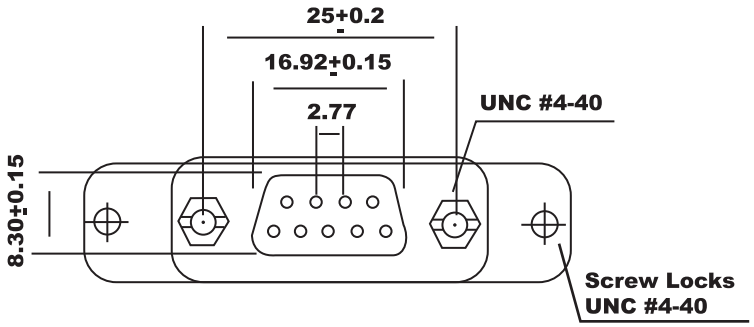

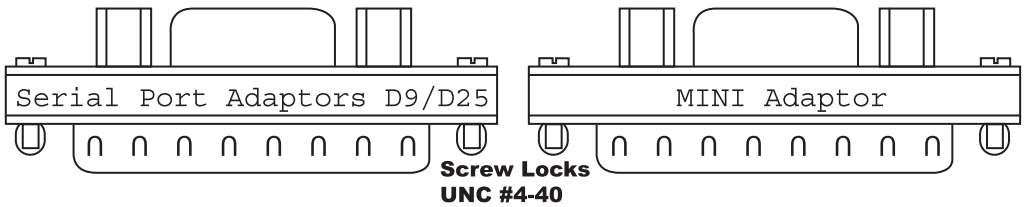

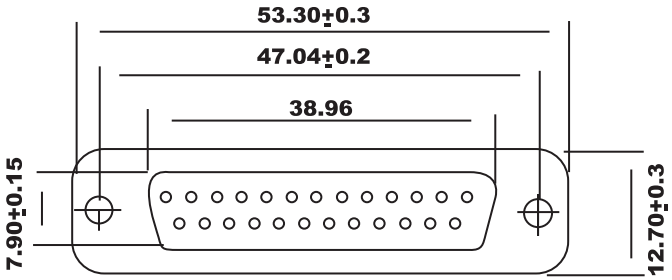

DB9 PIN(F)	DB25PIN (M)
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shell	Shell

Specification:

1.Voltage Rating: 300 VAC(rms)
2.Current Rating: 3 AMP CONTINUOUS
3.Dielectric Strength: 500 VAC
4.Contact Resistance: 10m OHM MAX 1 ADC
5.Insulation Resistance: 500M OHM min.
6.Mating Force Insertion Force: 1 oz-16 oz
Average: 150 gram
Extraction Force: 1 KG min.

Materials:

1.Housing: Thermoplastic P.B.T UL 94V-0, Black
2.Contact: Phosphor Bronze Gold, Selective Plated Over Nickel
3.Shell: Steel Tin Plated
4.Packing: See P-0039 Rev.C Packing Drawing + EAN Code
EAN Code: 4016032059967
5.Label: Orange Color with White Character

RoHS Complaint

Scale	1:1						Name
TOLERANCE					Drawn	11.22.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No. **AB470-R**

Title D-Sub RS 232 Adapter, 9 Pin - Female / 25 Pin - Male

Drawing No. **rev00**

Replace | Sheet