



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

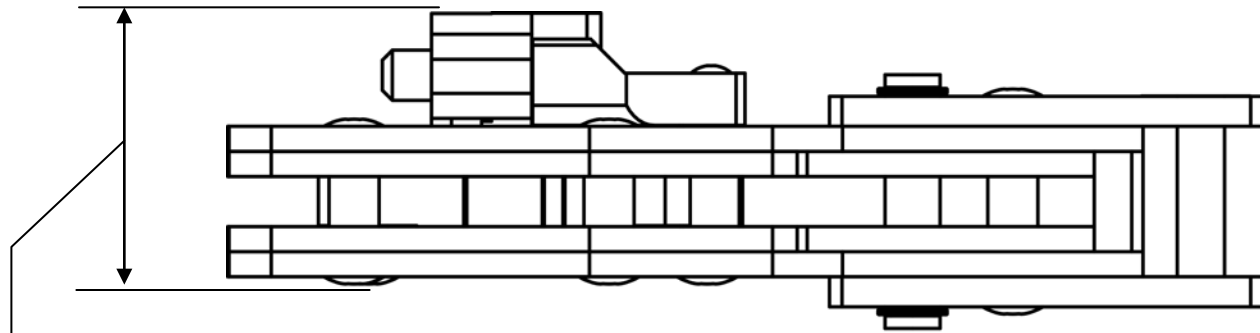

1.44" [37] CT-2525CH, CT-2550CH & CT-2500CH (WITH LOCATOR)  
 1.25" [32] CT-2570CH (WITHOUT LOCATOR)

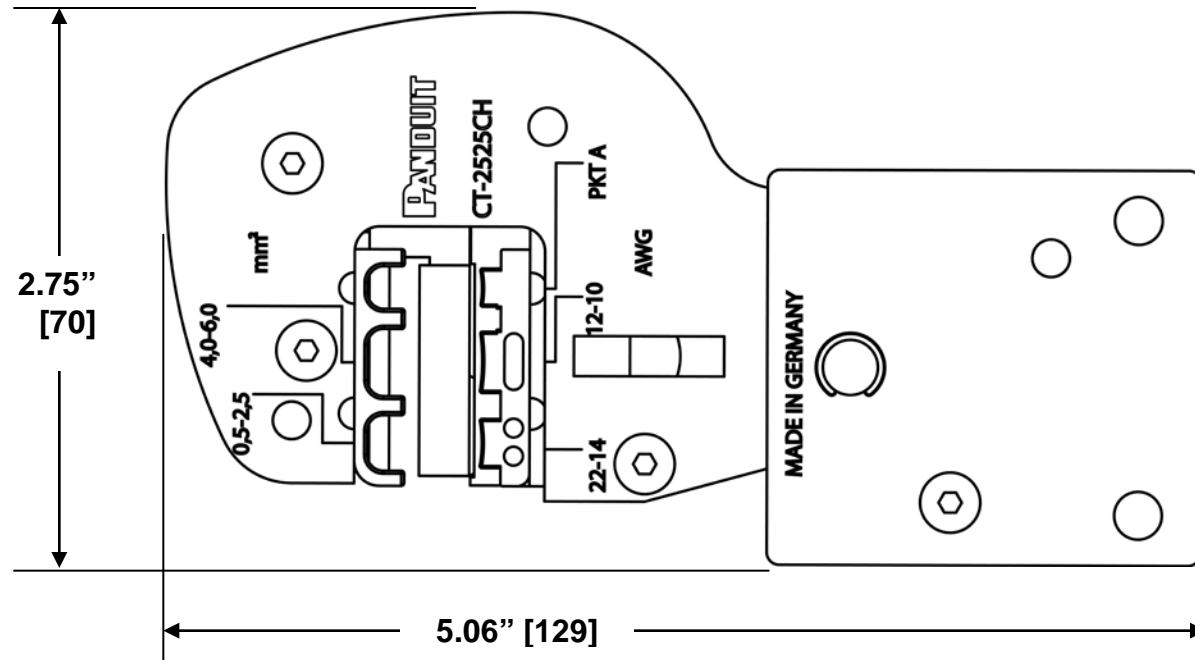

**CT-2525CH  
 SHOWN ABOVE**

**NOTES, UNLESS OTHERWISE SPECIFIED:**

These crimping heads are used with Panduit CT-2500 and CT-2500/E Battery Operated Crimping Tools.

Weight: 1.74 lbs. (0,79 kg)  
 Dimensions: 5-1/16" L x 2-3/4" H x 1-7/16" W (with Locator)  
 [129 L x 70 H x 37 W] mm

- CT-2525CH or CD-525: Crimping head or die insert for installing the following Panduit products: #26 – #22 AWG (0,14 – 0,5 mm<sup>2</sup>) insulated terminals and splices, #22 – #10 AWG (0,5 – 6,0mm<sup>2</sup>) fully insulated disconnects, insulated parallel splices; and specific #22 – #14 AWG (0,5 – 2,5mm<sup>2</sup>) barrel insulated disconnects.
- CT-2550CH or CD-550: Crimping head or die insert for installing the following Panduit products: #22 – #10 AWG (0,5 – 6,0mm<sup>2</sup>) insulated terminals and splices; and specific insulated disconnects. Reduced crimp effort advantage for #12 – #10 AWG (4,0 – 6,0mm<sup>2</sup>) terminations.
- CT-2570CH or CD-570: Crimping head or die insert for installing most of the following Panduit products: #22 – #10 AWG (0,5 – 6,0mm<sup>2</sup>) non-insulated terminals, disconnects; and specific non-insulated splices.
- CT-2500CH: Crimping head (frame only); to be used with crimping die inserts CD-525, CD-550 or CD-570 (sold separately).

The Crimping Head and/or Die Insert Installation Instructions can be found at [www.panduit.com](http://www.panduit.com), search for CT-2525CH, CT-2550CH, CT-2570CH, CT-2500CH, CD-525, CD-550 or CD-570.

Dimensions in [brackets] are in millimeters.  
 All dimensions are for reference only.

F:\wrkgpr\rvusers\ENGR DOCS\CUSTOMER DRAWINGS\TP25387B01\_03 CT-25XXCH CD.doc

REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP			
03	5-27-14	BLR	BJPU	ADD MM <sup>2</sup> DIMS TO CT-2525CH / CT-2550CH	4752	---	ABJ		<b>CD*CT-2525CH, CT-2550CH,                  CT-2570CH, CT-2500CH</b>		
02	1-28-14	BLR	BJPU	UPD BRANDING	4704	---	ABJ		UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.x) ± ---    (.xxx) ± --- (.xx) ± ---    ANGLES ± ---		
01	4-04-08	BLR	BJPU	ADD CT-2500CH & DIE INSERTS	4290	---	JRWA		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
00	3-02-07	BLR	SRRE	RELEASED	4241	---	SZ		DRAWN BY: <b>BLR</b> DATE: <b>3-02-07</b> CHK'D: <b>SRRE</b>		
									MATL: ----- SCALE: <b>NONE</b> DRAWING NO. <b>TP25387B01</b> DWG SIZE <b>B</b>		