т	۵	н т	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	65℃ to +175℃			
-Salt Spray	: 500 hours			

: 21.27 g ± 10%

8D 0

G

13

W

08

S


F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M18x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

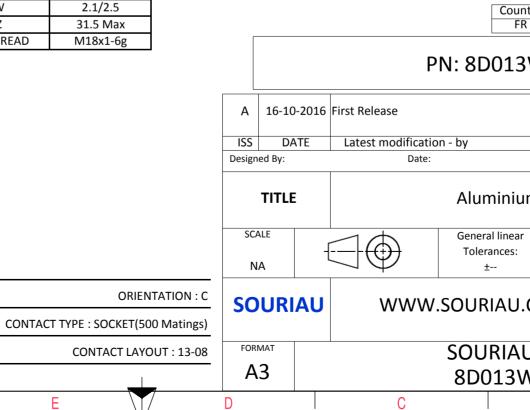

	Φ		A			
		}			4	
S EXA	AMPLE				3	
s which er of t indatic untry FR	non-conformit ch does not co he Parties or to on, technical n Jurisc	mply with by a third par	ty		2	
				MOD N°	-	
		CUSTOME	R DRAWING			
um	m Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
	This document is the property of					
	.COM SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET						
W08SC-C 1/2]	
	В		А			

	T	۵	н Г	m		0
		Contact Layout				Panel Cutou
4	×	$ \begin{pmatrix} & & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & &$			A	SQUARE FLANCE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi II A E CC C C E F G G C	Uion D X-axis (mm) Y-axis (mm) A +.065 (1.65) +.157 (3.99) B +.170 (4.32) +.000 (0.00) C +.120 (3.05) 120 (3.05) D .000 (0.00) 170 (4.32) E 120 (3.05) 120 (3.05) F 170 (4.32) +.000 (0.00) S 065 (1.65) +.157 (3.99)			τ <u>α</u>	
З		mber of Size Service Contact Supersedes ntacts contacts rating location 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
23						PN: 8D013V
					A 16-10-20 ISS DATE Designed By:	16 First Release
_					TITLE SCALE NA	Aluminium General linear Tolerances: ±
					SOURIA	
		1	1		FORMAT A3	SOURIAU 8D013W
	Н	G	F	E	D	C

