

4850, 6-pole, Line Socket, solder terminal, DIN Plug/Socket



Description


- Solder terminal :
for cable mounting
- DIN Plug: 6-pole , straight

Technical Data

| | | | |
|-----------------------|-------------------|---------------------------------|-------------------------------|
| Diameter | 9.0 mm | Allowable Operation Temperature | -20 °C to 70 °C |
| Number of Poles | 6-pole | Terminal | solder terminal silver plated |
| Ratings DC | 2 A / 12 VDC | Lifetime | 5000 Insertions |
| Ratings AC | 1 A / 100 VAC | | |
| Dielectric Strength | 250 VAC | | |
| Insulation Resistance | > 50 MΩ @ 250 VDC | | |

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

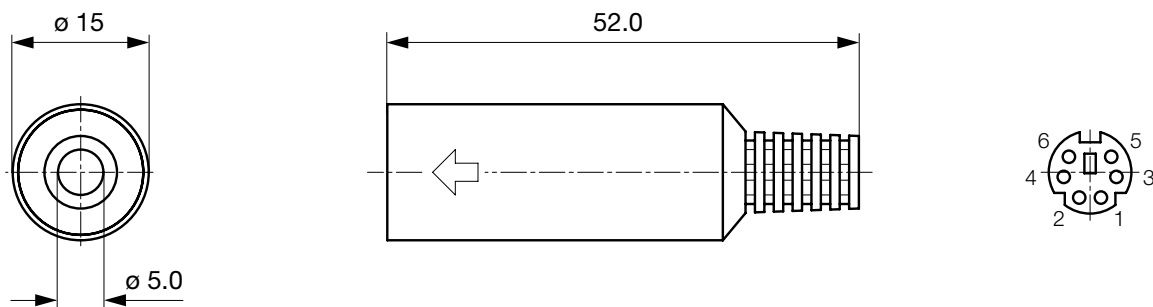

Cable diameter max. 5.0 mm

All Variants

| Product group | Diameter [mm] | Number of Poles | Terminal | Order Number |
|-----------------|---------------|-----------------|-----------------|--------------|
| DIN Plug/Socket | 9.0 | 6-pole | solder terminal | 4850.3600 |

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description



[DIN Plug/Socket Overview complete](#)

4850, 6-pole, Plug, solder terminal, DIN Plug/Socket

4850.1610

[DIN Plug/Socket further types to 4850.3600](#)