



RECOMMENDED LAND PATTERN DIMENSION OF PCB

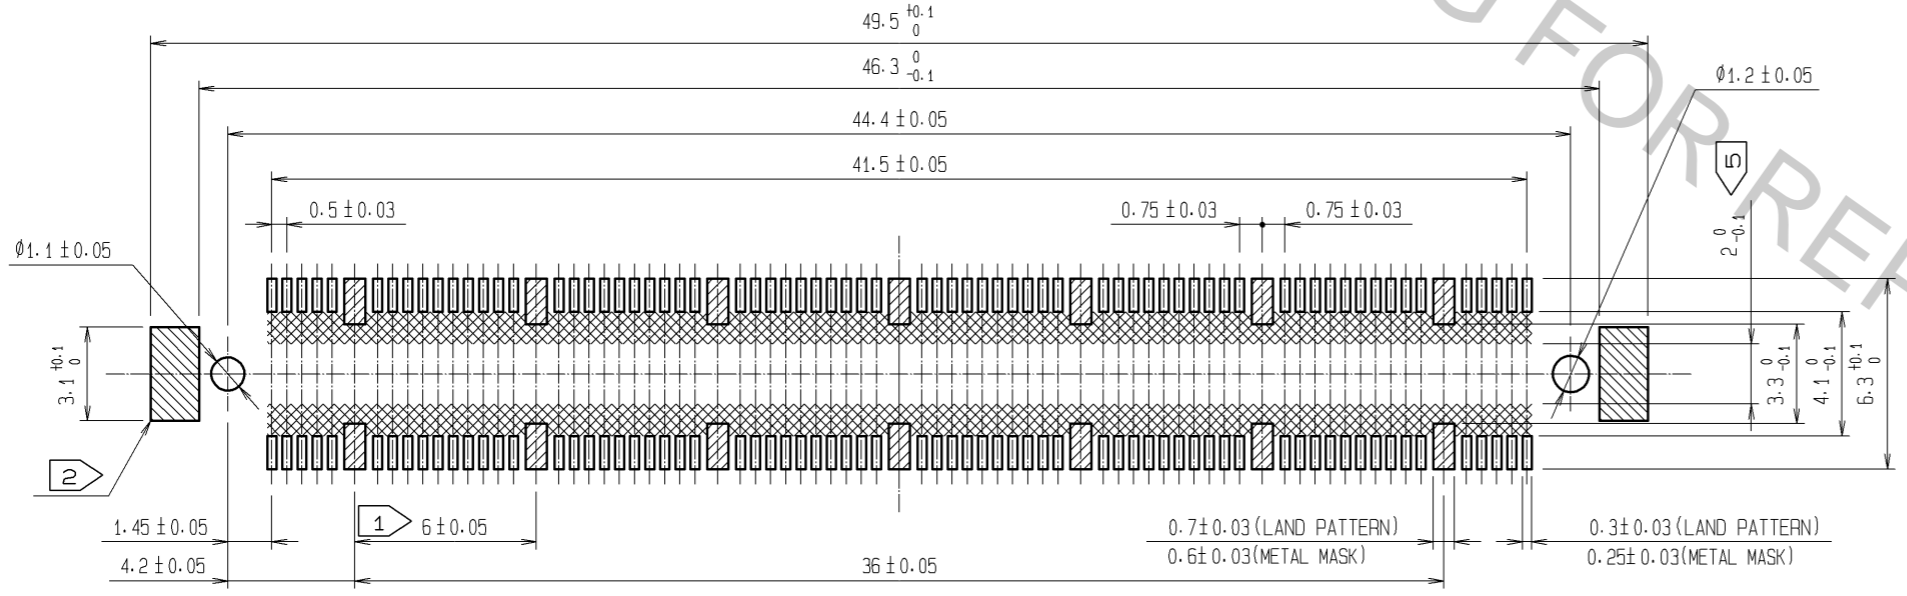

- NOTES
- 1 14 HATCHED PARTS: GROUND CIRCUIT.
  - 2 2 HATCHED PARTS: GROUND CIRCUIT.
  - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
  - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - 6 EMBOSS CARRIER TAPE PACKAGE IS APPLIED ON THIS PRODUCT. PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
  - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1µm min.	6	POLYESTER	TOP COVER TAPE				
		LEAD AREA: TIN-PLATING 1µm min.			EMBOSSED CARRIER TAPE				
		UNDER PLATING: NICKEL 1µm min.							
2	PHOSPHOR BRONZE	TIN-PLATING	5	POLYSTYRENE					
1	LCP	BEIGE UL94V-0	4	PHOSPHOR BRONZE	TIN-PLATING				
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS		
UNITS		⊙	SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm			4 : 1	△					
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED: HS. OKAWA	10.06.29	DRAWING NO.		EDC3-151963-21			
		CHECKED: HT. YAMAGUCHI	10.06.29	PART NO.		FX10A-140P/14-SV1(91)			
		DESIGNED: KN. SHIBUYA	10.06.29	CODE NO.		CL570-0104-8-91			
		DRAWN: KY. SUGIBUCHI	10.06.15			△ 1/2			

# DRAWING FOR PACKING(2:1)

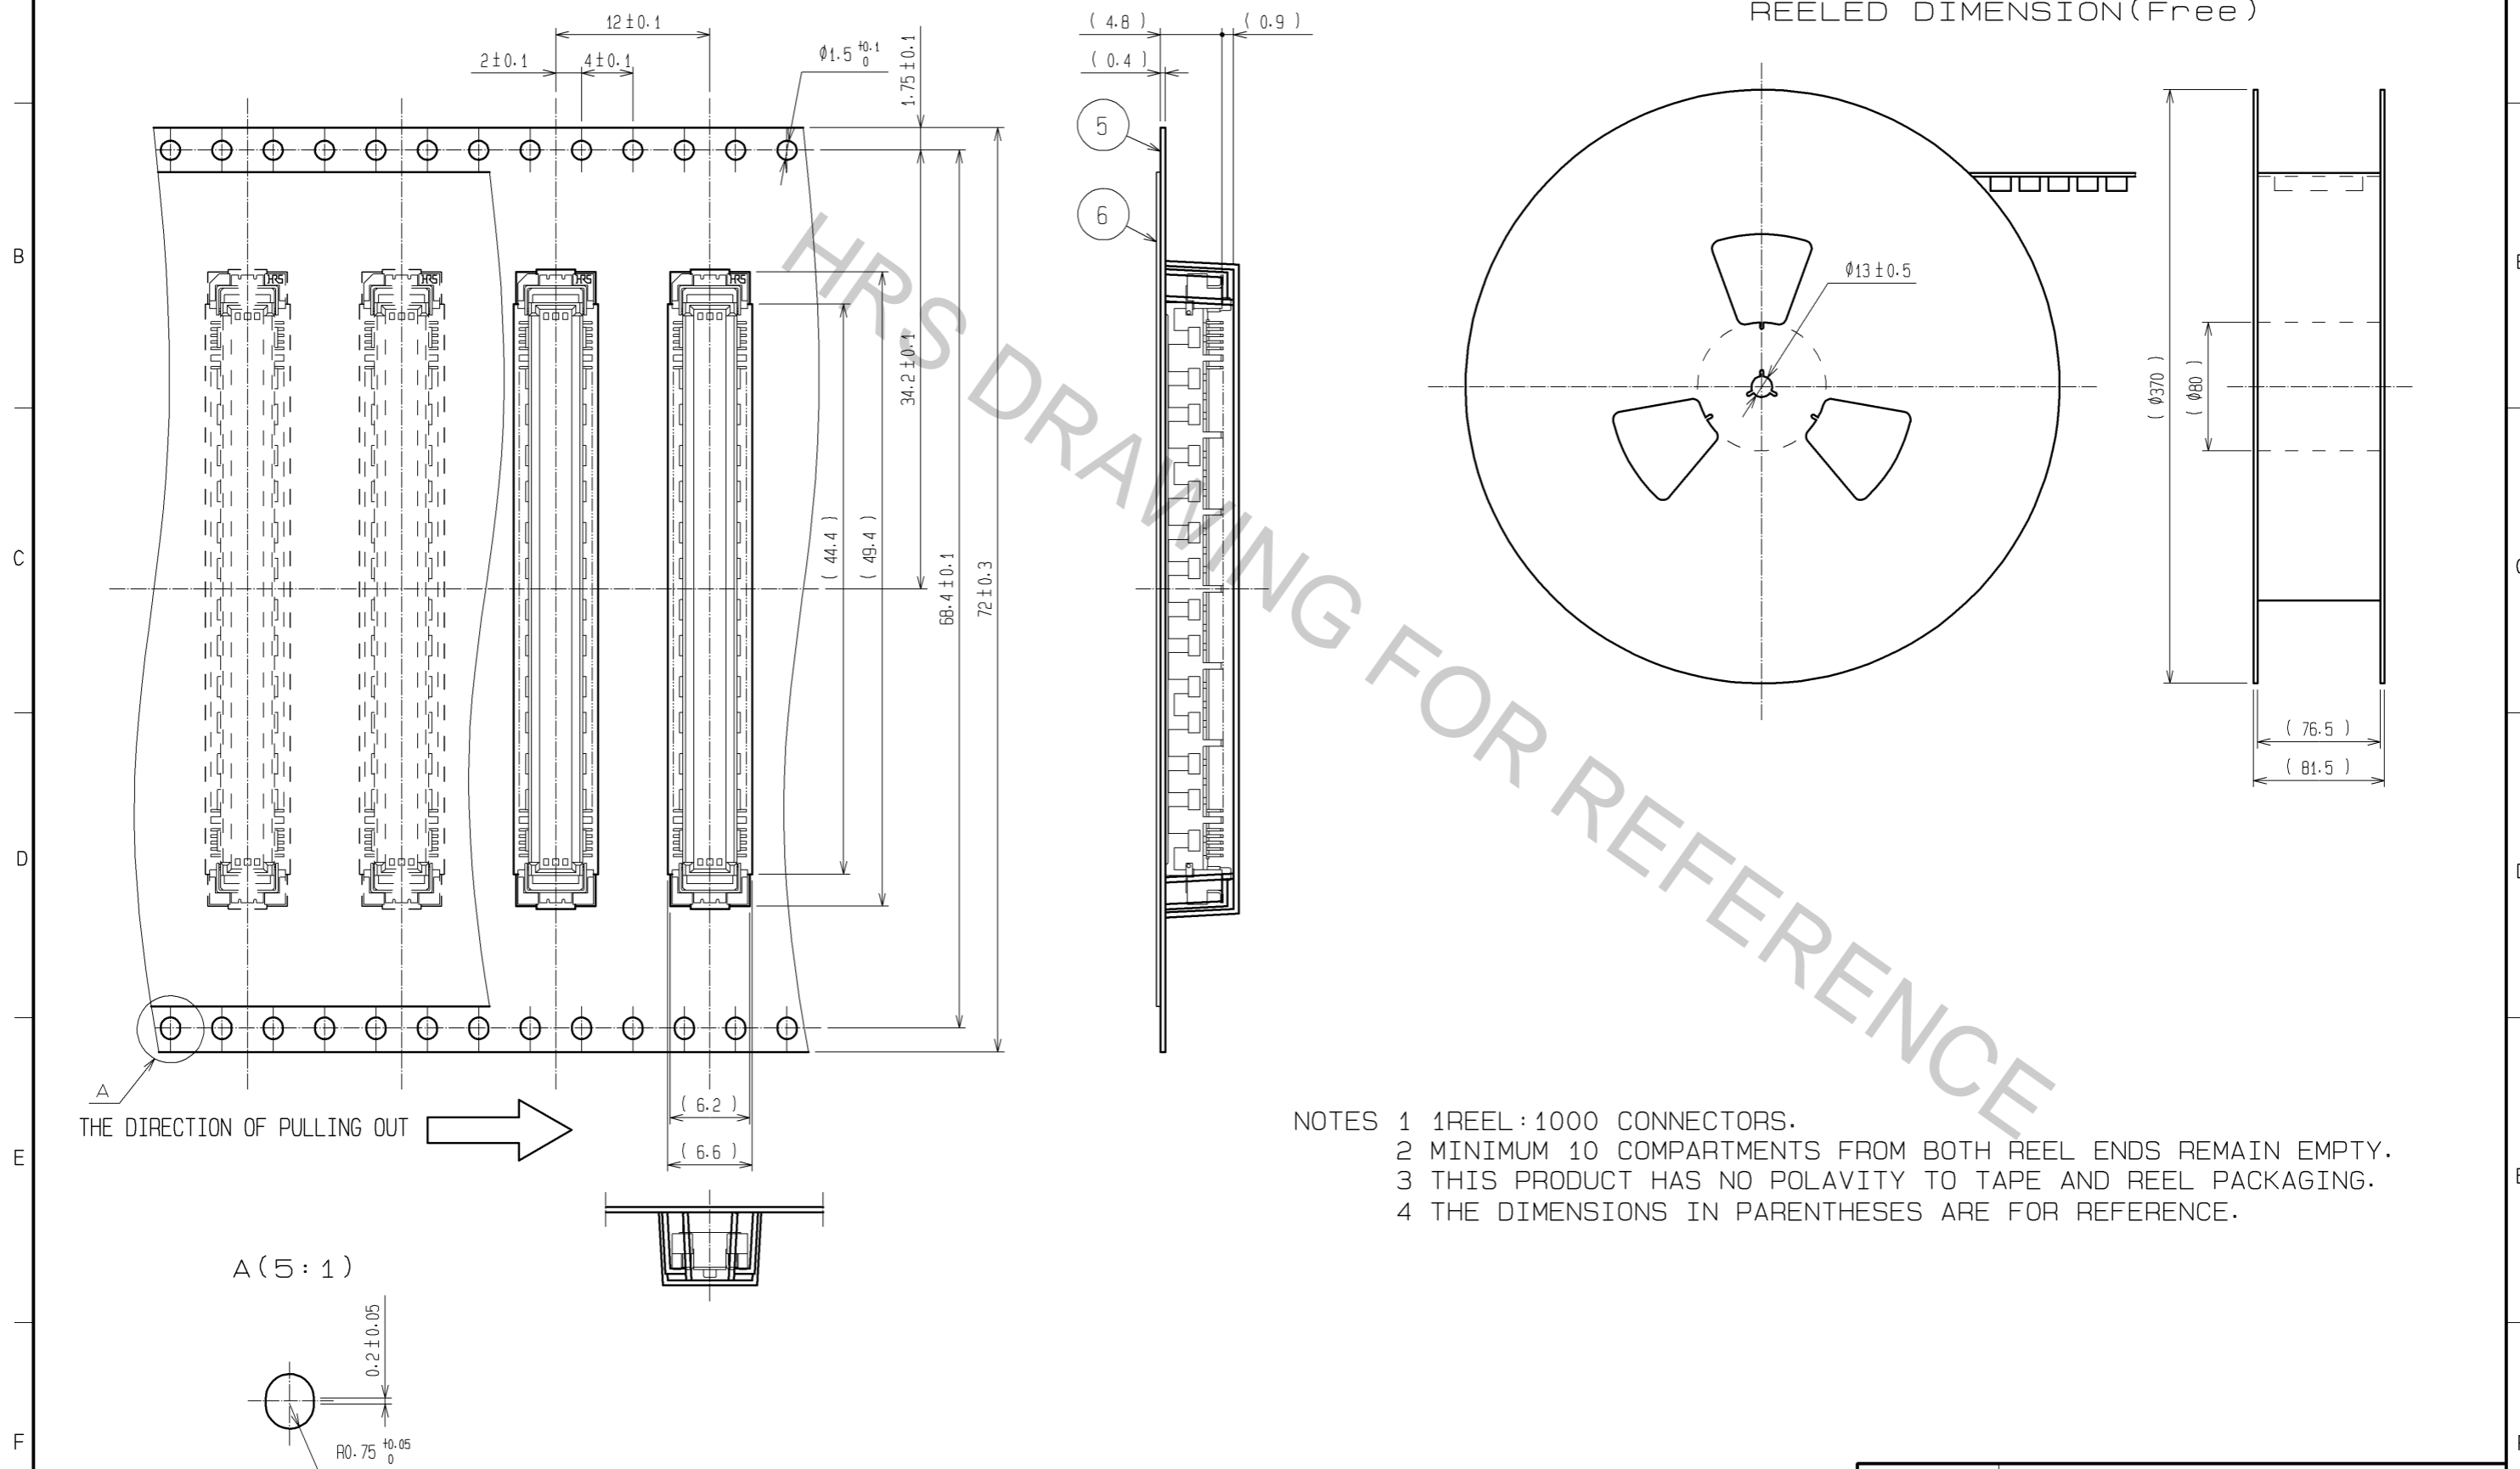

- NOTES
- 1 REEL : 1000 CONNECTORS.
  - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
  - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
  - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

<b>HRS</b>	DRAWING NO.	EDC3-151963-21
	PART NO.	FX10A-140P/14-SV1(91)
	CODE NO.	CL570-0104-8-91
		$\triangle$ 2/2

Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.