





A

A

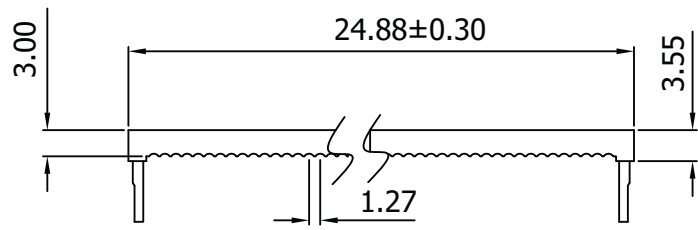


B

B

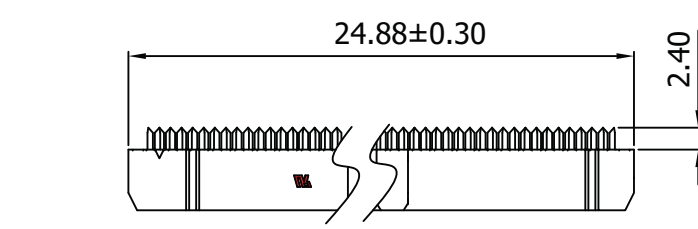

C

C

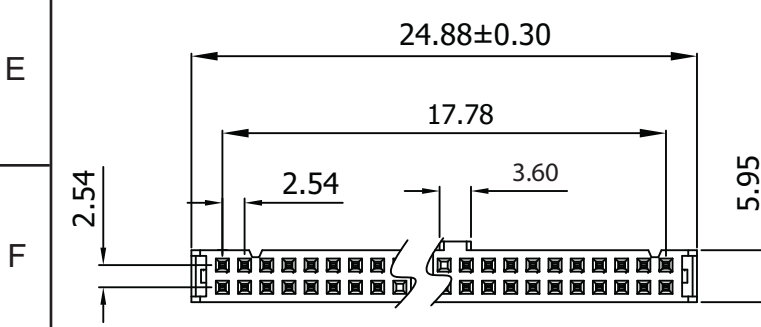

Material:

- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp
- Insulation Resistance: 1,000MΩ Min.
- Contact Resistance: 30MΩ Max.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C ~ +85°C

D

D

E

E

F

F

Unit: MM±0.20MM

G

G

H

H



Scale	1:1						Name
TOLERANCE						Drawn	10.19.11 Chappell
X.X	±0.40					Approved	
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
Modification			Date	Name			

Item No. AWP16-7241-T-R	
Title IDC-Socket - 2.54MM Pitch, Gold Flash, Central Lug w/Strain Relief, 16 Contacts	
Drawing No.	rev00
Replace	Sheet