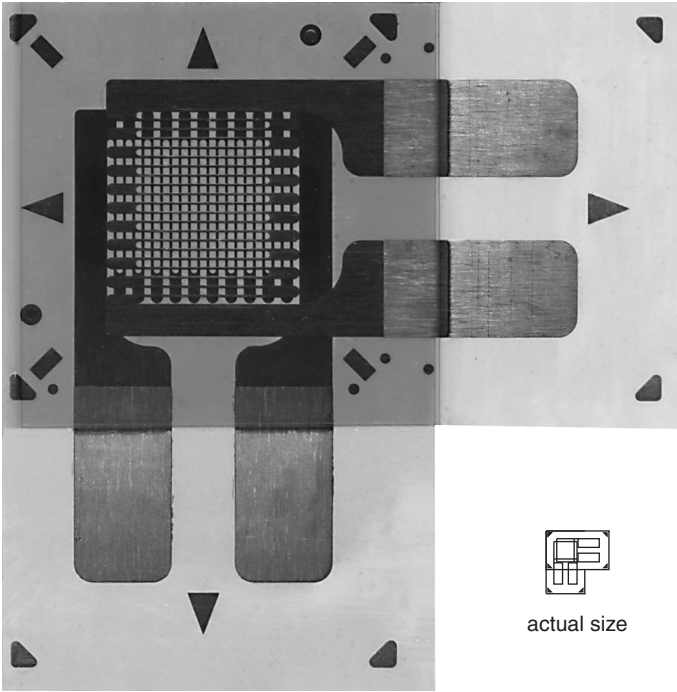



## General Purpose Strain Gages - Tee Rosette

| GAGE PATTERN DATA   |                       |                   |   |  |  |
|---|-----------------------|-------------------|---|--|--|
|  <p>actual size</p>   |                       |                   | <b>GAGE DESIGNATION</b><br><br>See Note 1             | <b>RESISTANCE (OHMS)</b><br><br>120 ± 0.5%<br>350 ± 0.5% | <b>OPTIONS AVAILABLE</b>   |
|   |                       |                   | CEA-XX-062WT-120<br>CEA-XX-062WT-350                  |  |  |
| <b>DESCRIPTION</b><br><br>Small two-element 90° stacked rosette. Exposed solder tab area 0.07 x 0.04 in [1.8 x 1.0 mm]. Maximum operating temperature +150°F [+65°C]. |                       |                   |   |  | <br><b>RoHS</b><br>COMPLIANT |
| <b>GAGE DIMENSIONS</b>  |                       |                   | Legend: ES = Each Section<br>S = Section (S1 = Sec 1) | CP = Complete Pattern<br>M = Matrix                      | inch<br>millimeter   |
| <b>Gage Length</b>  | <b>Overall Length</b> | <b>Grid Width</b> | <b>Overall Width</b>                                  | <b>Matrix Length</b>                                     | <b>Matrix Width</b>  |
| 0.062 ES  | 0.235 CP              | 0.120 ES          | 0.235 CP  | 0.33   | 0.33   |
| 1.57 ES   | 5.97 CP               | 3.05 ES           | 5.97 CP   | 8.3  | 8.3  |

| GAGE SERIES DATA  |   |              |                                 |
|---|---|--------------|---------------------------------|
| See Gage Series data sheet for complete specifications. |   |              |                                 |
| Series  | Description                             | Strain Range | Temperature Range               |
| CEA   | Universal general-purpose strain gages. | ±3%          | -100° to +150°F [-75° to +65°C] |

**Note 1:** Insert desired S-T-C number in spaces marked XX.