



DC25: 2500 TO 2700 MHz OPERATION

The DC25 is a directional antenna system, which incorporates a two-piece aluminum die-cast parabolic grid type antenna reflector with a patented 50 ohm wideband passive feed dipole. Installation is simple with the Laird Technologies adjustable tilt "Heavy Duty" bracket that comes standard. The bracket accommodates poles from one inch up to two inches OD. Brackets are full galvanized for extreme corrosion protection and each reflector comes complete with stainless steel hardware and complete assembly instructions. Dipoles are constructed of UV protected ABS plastic and are ultrasonically sealed for long term leak protection. They have a 30 inch LMR240 pigtail cable terminated with choice of N male or N female connectors.


FEATURES

- Small size/reduced shipping cost
- 50 ohm passive feed dipole
- 30 inch pigtail with N male or N female Connector
- 24 dBi antenna gain; horizontal or vertical polarity
- Rugged, lightweight and waterproof
- Heavy duty adjustable tilt bracket
- Two-piece powder coat painted die cast aluminum


MARKETS

- WiMAX applications
- Wireless internet access
- Wireless bridges
- Point-to-point repeaters
- MMDS applications
- Streaming video

ANTENNA PATTERNS

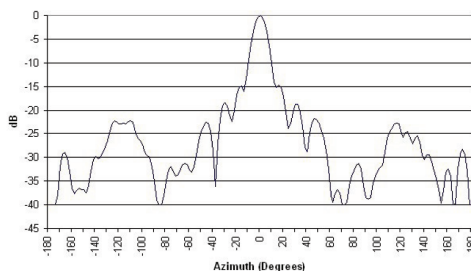

DC25 Horizontal

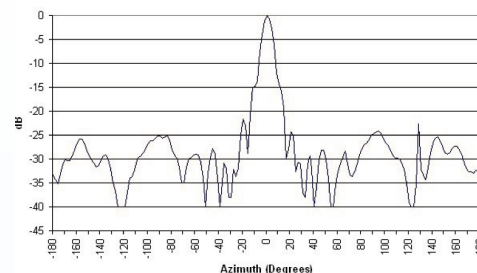

DC25 Vertical

global solutions: local support.™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

SPECIFICATIONS

PARAMETER	MIN	TYP	MAX	UNITS
Frequency Range	2500		2700	MHz
Gain		24		dBi
Input Return Loss (S11)		-14		Deg
VSWR		1.5:1		
3 dB Beam Angle		8		
Cross Pole		26		dB
Front-to-Back	24			dB
Side Lobe			-20	dB
Impedance		50		W
Focal Length		16 (40.6)		in (mm)
Dimension (L x W)		42 (107) x 24 (61)		in (mm)
Weight		5.5 (2)		lbs (kgs)
Pole Diameter (OD)	1 (25)		2 (50)	in (mm)
Operating Temperature	-45		+70	Deg C
Wind Loading				
100 MPH			80.5 (36.5)	lbs (kgs)
140 MPH			126 (57)	

SYSTEM ORDERING INFORMATION

DC25HDPF2P	2.5 GHz die-cast grid antenna with N male connector
DC25HDPF2PF	2.5 GHz die-cast grid antenna with N female connector

NOTES

- All shipments F.O.B. Schaumburg, IL 60173

ANT-DS-DC25 0511

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.