| REV. | DATE | DESCRIPTION |
|---|---|---|
| A | 02/06/00 | ADD BARREL PLATING |

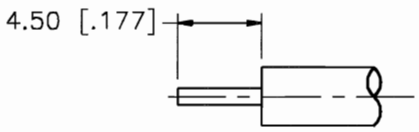


RECOMMENDED
CABLE STRIPPING DIM'S

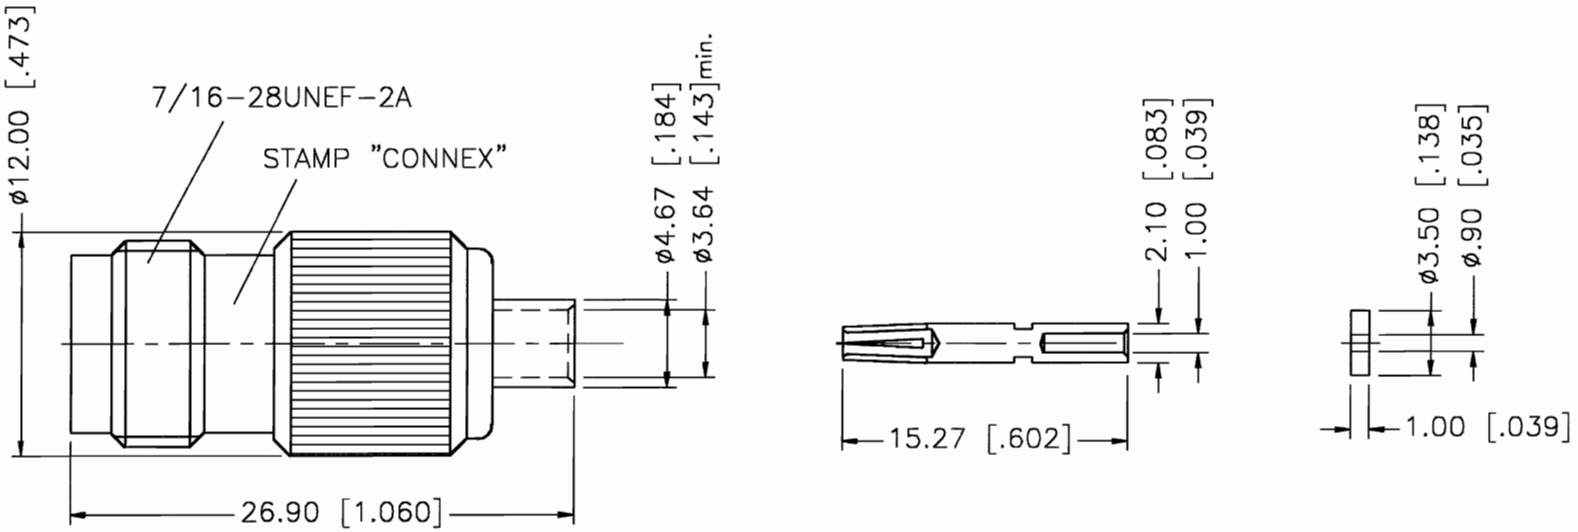


| | DESCRIPTION | MATERIAL | FINISH |
|---|---|---|---|
| 1 | BODY | BRASS | NICKEL |
| 2 | INSULATOR | TEFLON | NATURAL |
| 3 | CONTACT PIN | PHOS. BRONZE | GOLD |
| 4 | BARREL | BRASS | GOLD |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1
315–1000 = ± 1.6
1000–2000 = ± 2.4

DO NOT SCALE DRAWING

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | G.R.S. | 02/06/00 |
| CHECKED | | |
| ISSUED | | |

Connector Corporation

TITLE: TNC DIRECT SOLDER JACK (FOR .141" SEMI RIGID CABLE)

| SIZE | FSCM NO. | DWG. NO. | REV. |
|---|---|---|---|
| A | 99001 | 122423.DWG | A |

| SCALE | PART NO. | SHEET |
|---|---|---|
| NA | 122423 | 1 OF 1 |