



HD SERIES™ HIGH PERFORMANCE DISH ANTENNA

HDDA5W



4900 TO 5875 MHz HIGH PERFORMANCE DISH ANTENNA

The new HD Series dish antennas offered by Laird Technologies offer the system engineer the best performance available on the market. The antennas meet ETSI EN 302.326-3 DN1-DN5 specifications, the most stringent specifications for point to point backhaul antennas. The unique feed system is available in a single polarization version which can be mounted for either vertical or horizontal polarization. There is also a dual polarized version available for those systems which can utilize dual polarization to increase bandwidth or implement diversity. An optional fiberglass radome is available for added environmental protection.

FEATURES


- Wide band operation
- Vertically or horizontally polarized
- Dual horizontal / vertical and dual-slant polarity models available
- Ultralow sidelobes, meets ETSI standards
- Extremely rugged for long service life in extreme environments

MARKETS


- 802.11 applications
- OFDM systems
- MIMO systems
- Cellular backhaul
- Point-to-point backhaul
- Public safety communications
- WiMAX

TYPICAL ANTENNA PATTERNS

5.7 GHz H-Plane

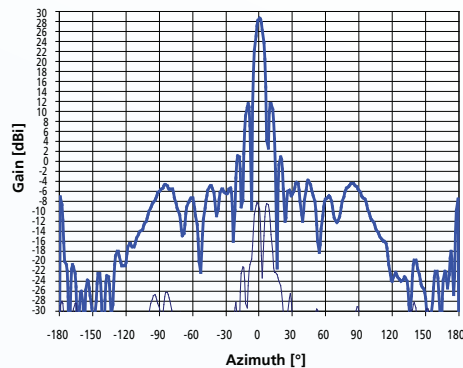

5.7 GHz E-Plane

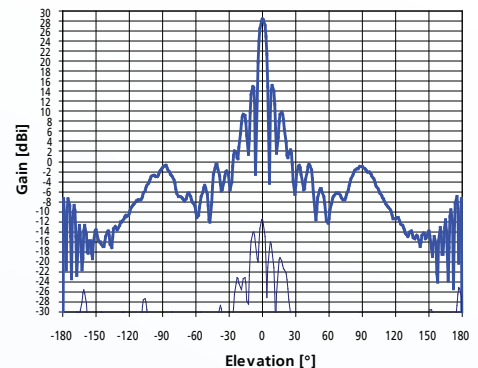

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com
Europe: +44.1628.858941
IAS-EUSales@lairdtech.com
Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com
www.lairdtech.com



HD SERIES™ HIGH PERFORMANCE DISH ANTENNA

HDDA5W

SPECIFICATIONS

PARAMETER	MIN	TYP	MAX	UNITS
Frequency range (single pol.)	4900		5875	MHz
Frequency range (dual pol.)	4940		5875	MHz
VSWR (single pol.)		1.5:1		
VSWR (dual pol.)		1.8:1		
Impedance		50		OHM
Cross-pol suppression		>30		dB
Sidelobes		ETSI EN 302.326-3 DN1-DN5		
Port-to-port isolation (dual pol.)		>30		dB
Input power			100	W
Mechanical downtilt			30	deg
Pole diameter (OD)	2 (50)		4 (101.6)	inch (mm)
Operating temperature	-40		+70	°C

PARAMETER	HDDA5W-29-xx	HDDA5W-32-xx
Gain	29 dBi	32 dBi
Beamwidth	6°	4°
Front-to-back	>32 dB	>38 dB
Weight	8 kg	10 kg
Dimensions (diameter)	25.5 in (648 mm)	36.5 in (927 mm)

SYSTEM ORDERING

HDDA5W-29-SP 29 dBi single polarity with N female connector
HDDA5W-29-DP2 29 dBi dual polarity with N female connector
HDDA5W-32-SP 32 dBi single polarity with N female connector
HDDA5W-32-DP2 32 dBi dual polarity with N female connector
DA5-29RADOME Fiberglass Radome Cover for 2ft (0.3m) dish
DA5-32RADOME Fiberglass Radome Cover for 3ft (0.6m) dish

WIND LOADING (LBS.)

MODEL	100MPH	125MPH
HDDA5W-29	113	177
HDDA5W-29 with Radome	75	116
HDDA5W-32	256	400
HDDA5W-32 with Radome	111	174

NOTES

- All shipments F.O.B. Schaumburg, IL 60173



Dish antenna shown with optional radome

ANT-DS-HDDA5W 0113

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2012 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.