

# C1632X7S0G475M130AC

TDK Item Description : C1632X7S0G475MT\*\*\*\*



## Application & Main Feature

Commercial Grade ( Low ESL Reverse Geometry )

## Series

C1632 [EIA CC0612]



## Dimensions

L 1.60mm +/-0.2mm  
 W 3.20mm +/-0.2mm  
 T 1.30mm +/-0.15mm  
 B 0.20mm Min.

## Temperature Characteristic

X7S (-55 to 125 degC +/-22%)

## Rated Voltage

0G (4Vdc)

## Capacitance

4.7uF

## Capacitance Tolerance

M (+/-20%)

## Dissipation Factor

5% Max.


## Insulation Resistance

21Mohm Min.


## AEC-Q200

Not Applicable


## DC Bias Characteristic

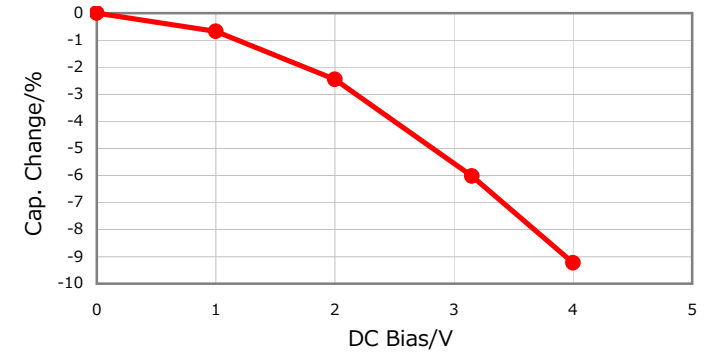


## |Z|, ESR vs. Freq. Characteristics

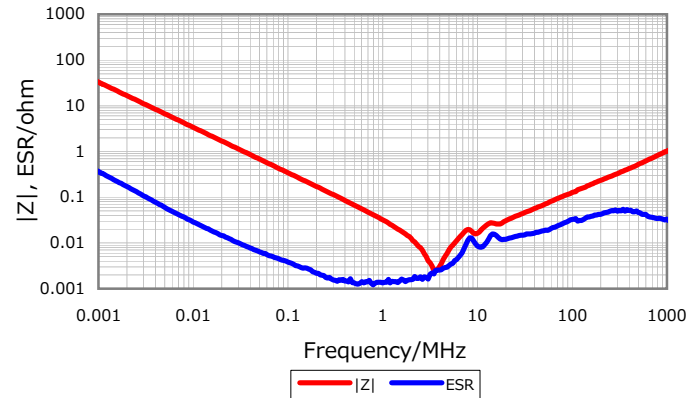


## Temperature Characteristics

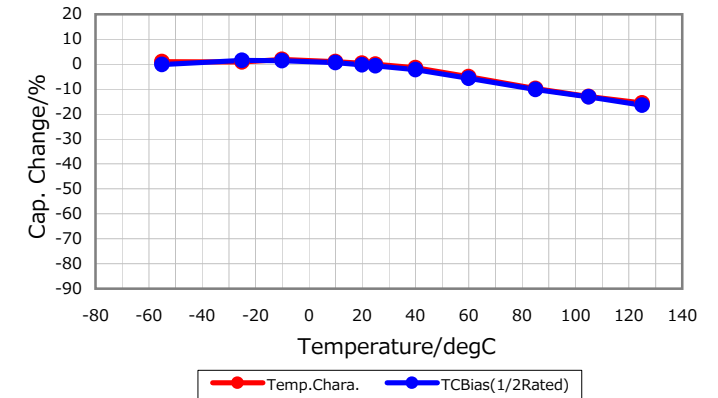

## Cap. vs. Freq. Characteristic

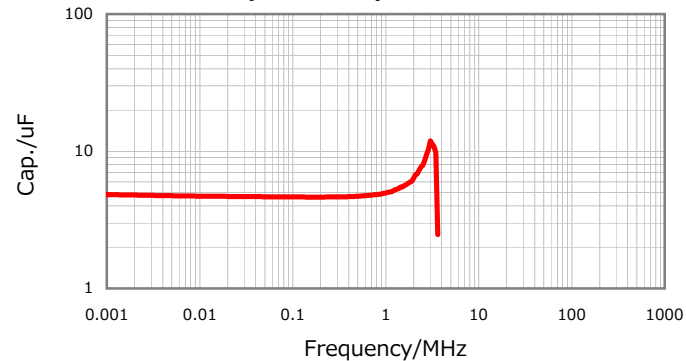

## Ripple Temperature Rise Characteristics

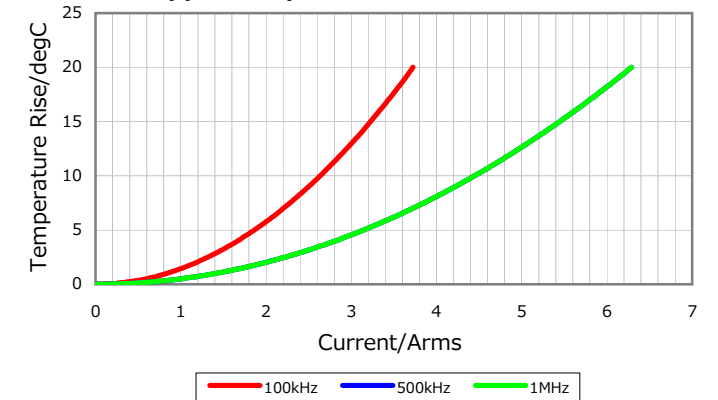

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 3, 2016