

Ŧ	۵	П	m	D	0



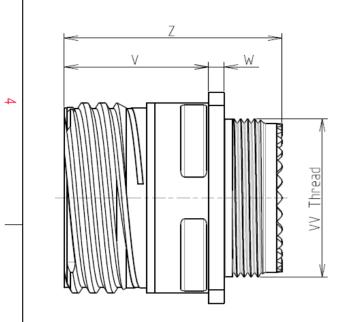

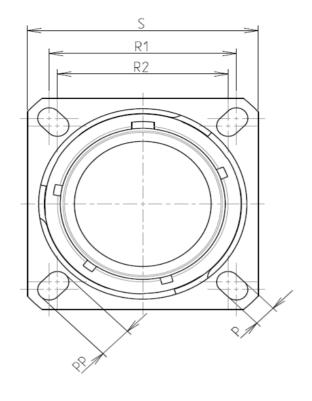

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium		
	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
\sim	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souria	u contacts and Accessories		
	-Temperature Range	65°C to +200°C		
	-Salt Spray	· : 48 hours		
	-Mass	: 37.81 g ± 10%		
		<u> </u>		

8D 0

G

17

-

F

06

S

F

В

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			


ORIENTATION : B

CONTACT LAYOUT : 17-06

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

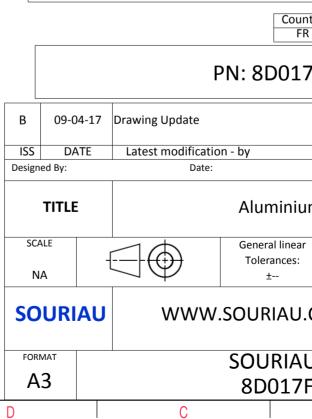

σ		A					
R				4			
S EXAMPLE				3			
any non-conformi which does not co of the Parties or	omply with by a third part	ý					
	tion, technical notice.) ry Jurisdiction & Control List Not Listed						
7F06SB							
I			MOD N°				
um Recentac	CUSTOMER DRAWING						
	n Receptacle 8D series						
:	85			1			
I.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N°	1		SHEET				
7F06SB-C B		A	1/2	J			

