
Ξ	Q	г	ш			0	ω	A	
	Z	ØS							
ω						LAYOUT SHOWN AS	EXAMPLE		
		Keying Sh	nown as example						
CHARACTERISTICS			Connector dimensi	on 1					
-Standard : Based or	MIL-DTL-38999 Series III		Dim No	minal					
-Shell Material -Shell Plating -Insulator -Contacts	Shell Material: AluminiumØS35.7 Max-Shell Plating: Black Zinc NickelZ31 Max-Insulator: ThermoplasticVV THREADM25x1-6g-Contacts: Copper Alloy: Second				SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet	: Silicon Elastomer	minimum				Cour		& Control List Listed	
-Contact Plating       : Gold over copper Alloy 0.8μm minimum         -Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories					PN: 8D517Z08SB				
-Temperature Range	-				A 18-10-2016	First Release			
-Salt Spray 	: 500 hours : 37.62 g ± 10%				ISS DATE Designed By:	Latest modification - by Date:	CUS	TOMER DRAWING	MOD N°
					TITLE	Alum	inium Plug 8D se	ries	
BASIC SERIES:	8D 5 -	17 Z 08 S	В		SCALE	General linear Tolerances:	1	IPRDS / PROJECT <b>859</b>	
CONTACT TYPE     : Standard Crimp Contact       SHELL SIZE : 17     CONTACT TYPE : SOCKET(500 Matings)						SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission			r
PLATING : Z =	Black Zinc Nickel			ITACT LAYOUT : 17-08	FORMAT		U DRG N°	1	SHEET
					A3		ZO8SB-C		1/2
							/ \ // \ \ \ \ \ \ \		<i>,</i> .

-	Ŧ	۵	п –	m	U	0
		Contact Layout				
4	-х (	$ \begin{array}{c}                                     $				
	Conti positio A B C C D E F	Contacts           Location           X-axis           (mm)         (mm)           + 000 (0.00)         + 236 (5.99)           + 128 (3.25)         + 086 (2.18)           + 230 (5.84)         - 078 (1.98)           + 094 (2.39)         - 216 (5.49)				
ယ	G H Shell Arrangement Nu	128 (3.25) +.086 (2.18)				
	-					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o
N						(professional recommendations issued by entire (professional recommendation) Count FR PN: 8D517
					A 18-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Alumin General linear Tolerances: ±
					SOURIAU	
		1	1		FORMAT A3	SOURIAU 8D517Z
	Н	G	l F	E	D	C

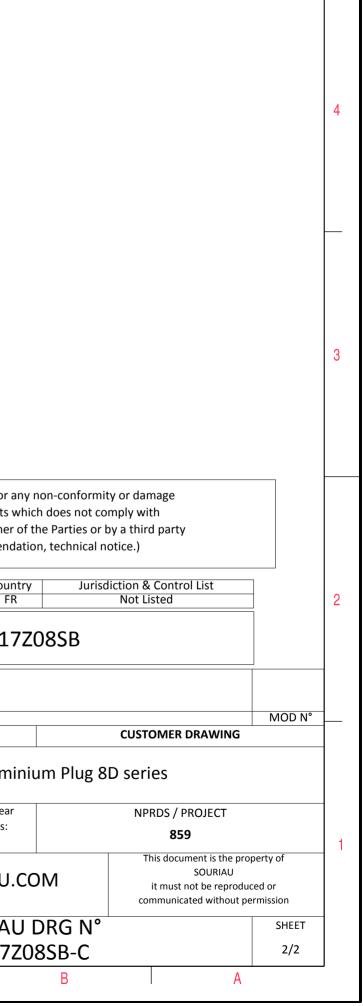

 $\triangleright$ 

σ