




REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	2008/7/3	L.CHAN




P/N RJSSE-5081-02 SHOWN




P/N RJSSE-5080-02 SHOWN

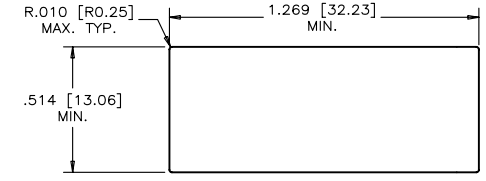


RECOMMENDED PANEL CUTOUT




1.254 [31.85]

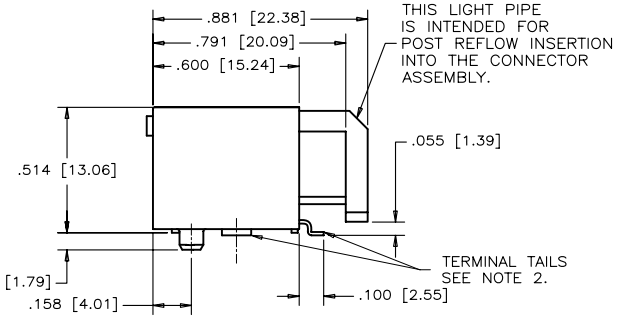


P/N RJSSE-5081-02 SHOWN



P/N RJSSE-5080-02 SHOWN

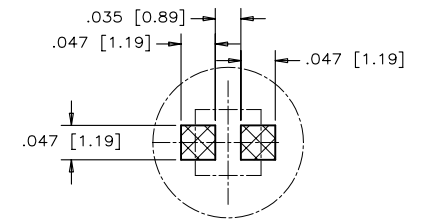


DETAIL 'A' (ENLARGED)
SMT LED SOLDER PAD (SMT LED TO BE PROVIDED BY THE CUSTOMER)

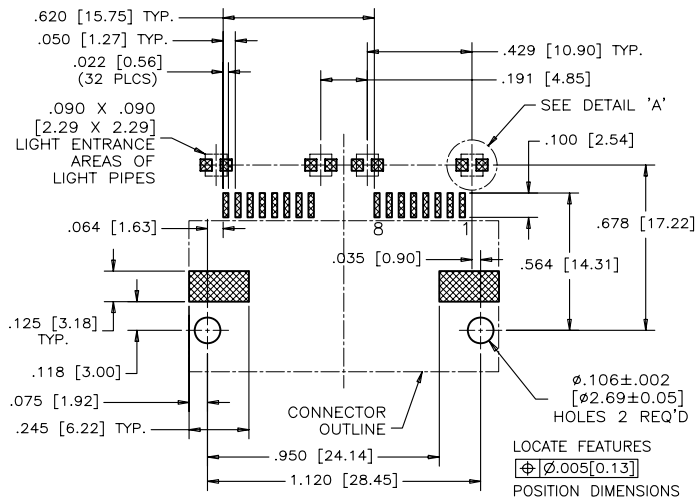

RECOMMENDED P.C.B. LAYOUT (COMPONENT SIDE OF BOARD)

P/N RJSSE-5081-02 SHOWN



P/N RJSSE-5080-02 SHOWN

1. MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0
 COLOR: BLACK
- CONTACTS:
 PLATING: PHOSPHOR BRONZE
 20 μ" [0.508 MICRONS] MIN. GOLD ON MATING SURFACES.
 50 μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
 100 μ" [2.54 MICRONS] MIN. MATTE TIN ON CONTACT TAILS.
- LIGHT PIPE: CLEAR POLYCARBONATE RATED UL 94V-0.
2. COPLANARITY SPECIFICATION:
 WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE,
 THE MAXIMUM GAP BETWEEN BOTH FITTING NAILS AND ALL
 TERMINAL TAILS IS .004 [0.10].

PART NUMBER: RJSSE-508X-02
 LIGHT PIPE DESIGNATION
 0 - BLOCKED
 1 - WITH LIGHT PIPE

MATERIAL	DRAWN	J.OUYANG	DATE	2008/7/3	Amphenol Canada Corp.							
	DESIGNED	MT.CHAN	2008/7/3									
FINISH	CHECKED	L.CHAN	2008/7/3		TITLE	2 PORT, SURFACE MOUNT, RJ45 MODULAR JACK, 8 POSITION, 8 CONTACTS, UNSHIELDED, LIGHT PIPES OPTIONAL - RoHS COMPLIANT						
	I. E. APPRD.				DWG	DRAWING NO.	P-RJSSE-508X-02	REV.	A			
	Q. A. APPRD.				SCALE	3/1	WT.		SURF.		SHEET	1 OF 1
	DWG. APPRD.											
	ENG. REL. NO.											
	REF.	EAR 13291										
	DIMENSIONS ARE IN	INCHES	CODE ID. NO.	03554								

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.