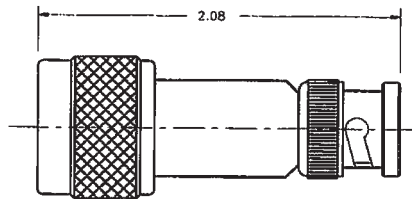
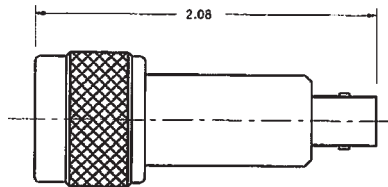



### N Male Plug to BNC Male Plug

**Model Number****ADT-2613-NM-BNM-02****SPECIFICATIONS****Frequency:** DC - 8.0 GHz**VSWR:** 1.15 @ DC-4.0 GHz  
1.25 @ 4.0-8.0 GHz**Impedance:** 50 Ohms**Finish:** Type N - Passivated Stainless Steel  
BNC - Nickel Plated Brass

### N Male Plug to BNC Female Jack

**Model Number****ADT-2614-NM-BNF-02****SPECIFICATIONS****Frequency:** DC - 8.0 GHz**VSWR:** 1.15 @ DC-4.0 GHz  
1.25 @ 4.0-8.0 GHz**Impedance:** 50 Ohms**Finish:** Type N - Passivated Stainless Steel  
BNC - Nickel Plated Brass

### N Female Jack to BNC Male Plug

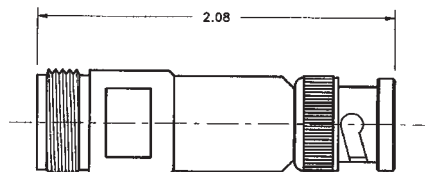**Model Number****ADT-2615-NF-BNM-02****SPECIFICATIONS****Frequency:** DC - 8.0 GHz**VSWR:** 1.15 @ DC-4.0 GHz  
1.25 @ 4.0-8.0 GHz**Impedance:** 50 Ohms**Finish:** Type N - Passivated Stainless Steel  
BNC - Nickel Plated Brass

### N Female Jack to BNC Female Jack

**Model Number****ADT-2616-NF-BNF-02****SPECIFICATIONS****Frequency:** DC - 8.0 GHz**VSWR:** 1.15 @ DC-4.0 GHz  
1.25 @ 4.0-8.0 GHz**Impedance:** 50 Ohms**Finish:** Type N - Passivated Stainless Steel  
BNC - Nickel Plated Brass