



45 Watt USB Power Delivery 2.0 Adapter with USB-C



Features

- USB-C
- Class B EMI
- Limited Power Source (LPS)
- OVP, OCP, OTP & Short Circuit Protection
- DOE Level VI, CoC V5 Tier 2

Applications

- Mobile Phone
- Tablet
- Notebook
- Networking Devices
- Monitor

Safety Approvals

- U/cUL
- CB
- CE

Mechanical Characteristics

- Length: 67mm (2.64in)
- Width: 48mm (1.89in)
- Height: 29mm (1.41in)
- Weight: 145g (.32lbs)


Output Specifications

Model	Prong Style	DC Output Voltage	Current Rating	Ripple ⁽¹⁾ P-P (max.)
AQ45A-5CKA	US	5V/12V/20V	3A/3A/2.25A	200mV
AQ45E-5CKA	EU	5V/12V/20V	3A/3A/2.25A	200mV

Notes: (1) Measured by using a 12 inch twisted pair terminated with a 10uF & 0.1uF ceramic in parallel. Oscilloscope is set to 20MHz.

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

AQ45A-5CKA Dimension Diagram Unit: mm (inch)

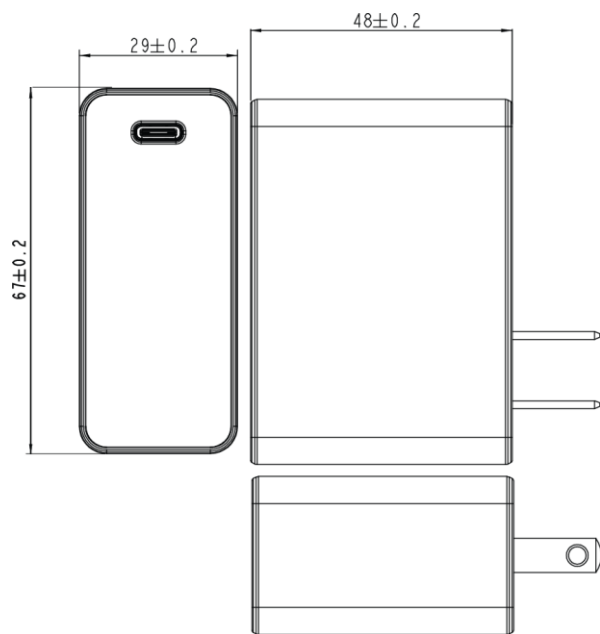

AQ45E-5CKA Dimension Diagram Unit: mm (inch)

