

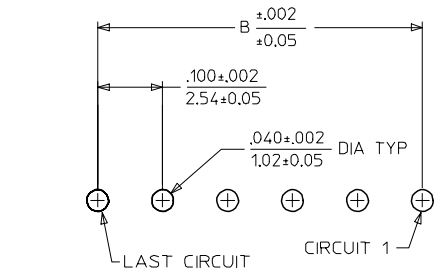
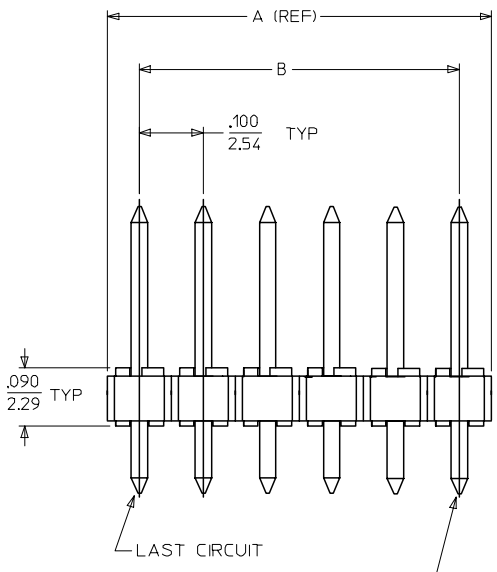



NO. OF CKTS.	A	B
2	.200	.100
	5.08	2.54
3	.300	.200
	7.62	5.08
4	.400	.300
	10.16	7.62
5	.500	.400
	12.70	10.16
6	.600	.500
	15.24	12.70
7	.700	.600
	17.78	15.24
8	.800	.700
	20.32	17.78
9	.900	.800
	22.86	20.32
10	1.000	.900
	25.40	22.86
11	1.100	1.000
	27.94	25.40
12	1.200	1.100
	30.48	27.94
13	1.300	1.200
	33.02	30.48
14	1.400	1.300
	35.56	33.02
15	1.500	1.400
	38.10	35.56
16	1.600	1.500
	40.64	38.10
17	1.700	1.600
	43.18	40.64
18	1.800	1.700
	45.72	43.18
19	1.900	1.800
	48.26	45.72
20	2.000	1.900
	50.80	48.26
21	2.100	2.000
	53.34	50.80
22	2.200	2.100
	55.88	53.34
23	2.300	2.200
	58.42	55.88
24	2.400	2.300
	60.96	58.42
25	2.500	2.400
	63.50	60.96
26	2.600	2.500
	66.04	63.50
27	2.700	2.600
	68.58	66.04
28	2.800	2.700
	71.12	68.58
29	2.900	2.800
	73.66	71.12
30	3.000	2.900
	76.20	73.66
31	3.100	3.000
	78.74	76.20
32	3.200	3.100
	81.28	78.74
33	3.300	3.200
	83.82	81.28
34	3.400	3.300
	86.36	83.82
35	3.500	3.400
	88.90	86.36
36	3.600	3.500
	91.44	88.90



PCB LAYOUT: COMPONENT SIDE
RECOMMENDED PCB THICKNESS: .062/1.57



6 CKT ISO SHOWN
FOR REF. ONLY

NOTES:

- MATERIAL: HOUSING: NYLON 46, GLASS FILLED, UL94V-0, COLOR: BLACK
0.64/.025 SQ PIN: PHOSPHOR BRONZE
- FINISH:
 - A- (154) OVERALL TIN: THICKNESS=150 M.I. MINIMUM.
 - B- (208) SELECTIVE GOLD IN CONTACT AREA: THICKNESS=15 M.I. MINIMUM; SELECTIVE TIN IN PC TAIL AREA: THICKNESS=100 M.I. MINIMUM; NICKEL OVERALL.
 - C- (228) SELECTIVE GOLD IN CONTACT AREA: THICKNESS=30 M.I. MINIMUM; SELECTIVE TIN IN PC TAIL AREA: THICKNESS=100 M.I. MINIMUM; NICKEL OVERALL.
- PRODUCT SPEC: NONE AVAILABLE
- PACKAGING INFORMATION: SEE SHEET 2
- PARTS ARE NOT STACKABLE ON .100 CENTERS

SEE CHART
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISED/REDRAWN EC NO: UCP2005-0469 DRAWN/DLS CHKD:SELHAG APPR:FSMITH	2004/09/23 2004/09/24 2004/09/24	QUALITY SYMBOLS ▽=0 ▽=0
---	--	-------------------------------

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES ± ---	± .005
3 PLACES ± ---	± .010
2 PLACES ± 0.13	± .025
1 PLACE ± 0.25	± .050
ANGULAR ±1/2°	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
ELHAG	2003/10/13
CHECKED BY	DATE
ELHAG	2003/10/13
APPROVED BY	DATE
FSMITH	2003/10/29

SCALE	DESIGN UNITS
---	INCH

GENERAL DOC	2-x	A
ME10	1	A

CUSTOM HEADER
.100/(2.54) CENTERLINE
BREAKAWAY-SINGLE ROW

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE CHART	SD-68300-200	1 OF 2



CUSTOM HEADER

68300

MATERIAL NO	PIN NO	PLT REF	DIM M	DIM P	FINAL NO OF CKTS	VOID CKT NO	KINKE D PIN	PACK PER	
68300-1100	42663-DHD567	567	.540 13.72	.170 4.32	8	NONE	NONE	PK-40873-0041	
68300-2000	42663-AXB567	567	.250 6.35	.200 5.08	2	NONE	NONE	PK-40873-0041	
68300-2001	42663-AXB567	567	.250 6.35	.200 5.08	3	NONE	NONE	PK-40873-0041	
68300-2002	42663-AXB567	567	.250 6.35	.200 5.08	8	5	NONE	PK-40873-0041	
68300-2003	42663-ARB567	567	.230 5.84	.200 5.08	5	NONE	NONE	PK-40873-0041	*****
68300-2004	42663-ARB567	567	.230 5.84	.200 5.08	6	NONE	NONE	PK-40873-0041	*****
68300-2005	42663-ARB567	567	.230 5.84	.200 5.08	8	NONE	NONE	PK-40873-0041	*****
68300-2006	42663-AXB567	567	.250 6.35	.200 5.08	5	NONE	NONE	PK-40873-0041	
68300-2007	SAME AS 42375-2910								SEE DWG A-42375
68300-2008	SAME AS 42375-2487								SEE DWG A-42375
68300-2009	SAME AS 42375-2486								SEE DWG A-42375

NOT RELEASED TO PRODUCTION
SHEET 1 IS ME10

REVISION: A	REVISION DATA EC: UCP2004-0469 DATE: 09/16/2004	TITLE: CUSTOM HEADER 100 CENTER BREAKAWAY, SINGLE ROW	SHEET No. 2
DOCUMENT NUMBER: SD-68300-200	CREATED / REVISED BY: RHOLTS	CHECKED BY: AELHAG	APPROVED BY: FSMITH



CUSTOM HEADER

68300

REVISION: A	REVISION DATA EC: UCP2004-0469 DATE: 09/16/2004	TITLE: CUSTOM HEADER 100 CENTER BREAKAWAY, SINGLE ROW	SHEET No. 3
DOCUMENT NUMBER: SD-68300-200	CREATED / REVISED BY: RHOLTS	CHECKED BY: AELHAG	APPROVED BY: FSMITH