
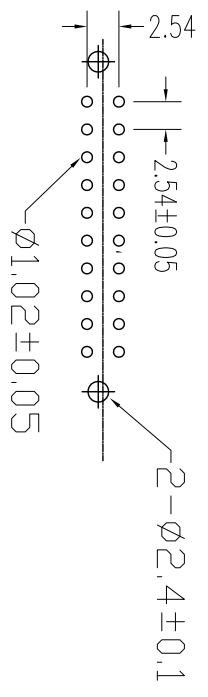
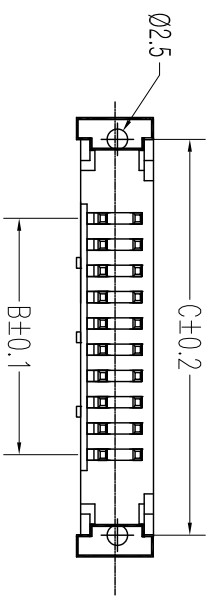
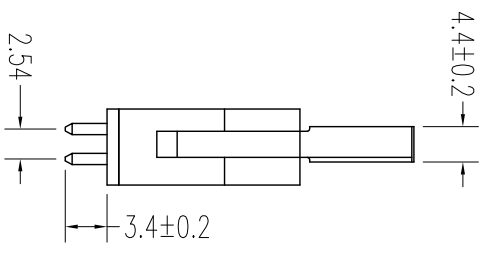
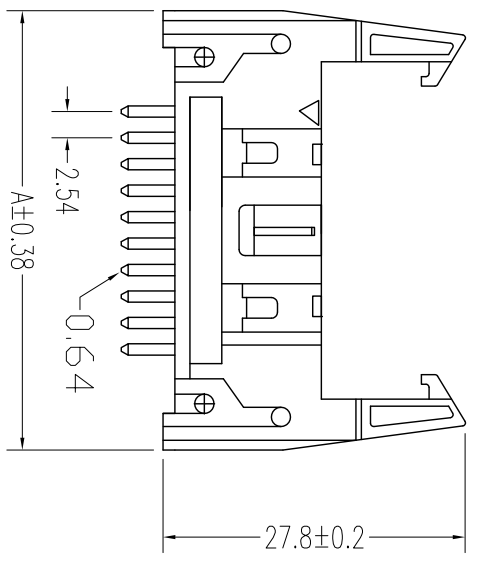
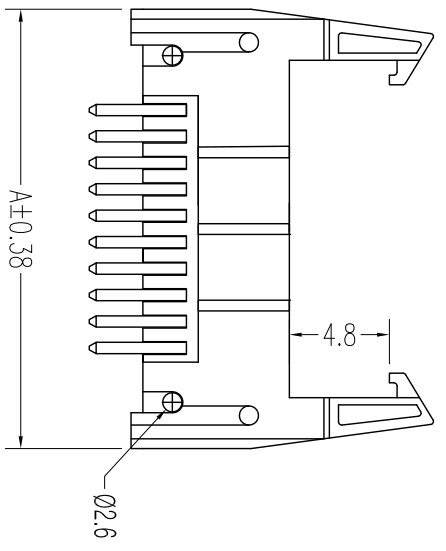


| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | RELEASE     | 2012.11.12 |

NOTES:  
 Insulator Material: PBT, UL 94V-0  
 Contact Plating: Tin 80-100U"  
 Contact Material: Brass

Current Rating : 1A AC,DC  
 Contact Resistance: 20MΩ Max.  
 Dielectric Withstanding: AC 500V  
 Insulator Resistance: 1000MΩ Min.  
 Operating Temp.: -40°C~+105°C



| NUMBER OF POSITIONS | DIMENSION |       |       |
|---------------------|-----------|-------|-------|
|                     | A         | B     | C     |
| 10                  | 32.00     | 10.16 | 27.94 |
| 14                  | 34.54     | 12.70 | 33.02 |
| 16                  | 39.62     | 17.78 | 35.56 |
| 20                  | 44.60     | 22.86 | 39.70 |
| 24                  | 49.78     | 27.94 | 45.72 |
| 26                  | 52.32     | 30.48 | 48.26 |
| 30                  | 57.40     | 35.56 | 53.34 |
| 34                  | 62.48     | 40.64 | 58.42 |
| 40                  | 70.10     | 48.26 | 66.04 |
| 50                  | 82.80     | 60.96 | 78.74 |
| 60                  | 95.50     | 73.66 | 91.44 |
| 64                  | 100.58    | 78.74 | 96.72 |

| UNLESS TOLERANCE |             |
|------------------|-------------|
| GENERAL          | ANGLE       |
| X. ± 0.30        | X.° ± 3.0°  |
| .X ± 0.20        | .X° ± 2.0°  |
| .XX ± 0.15       | .XX° ± 1.0° |
| .XXX ± 0.08      | .XXX ± 0.5° |

| DRAW      |          | SCALE |       | UNIT |      |
|-----------|----------|-------|-------|------|------|
| DESIGN BY | CHECK BY | SCALE | SHEET | MM   | REV. |
|           |          | 1:1   | 1/1   | MM   | A    |

**CnC Tech, LLC**

Part No.  
 3010-XX-001-12-99

