

#### INTRODUCTION:

Adam Tech Straight PCB tail D-Sub connectors are a popular interface for many I/O applications. Offered in 9, 15, 25, 37 and 50 positions they are an excellent choice for a low cost, sturdy, full metal body industry standard connection. These connectors are manufactured with precision stamped or machined turned contacts offering a choice of contact plating and a wide selection of mating and mounting options.

#### FEATURES:

- Industry standard compatibility
- Durable metal shell design
- Precision formed contacts
- Variety of Mating and mounting options

#### MATING CONNECTORS:

Adam Tech D-Subminiatures and all industry standard D-Subminiature connectors.

#### SPECIFICATIONS:

##### Material:

- Standard insulator: PBT, 30% glass reinforced, rated UL94V-0
- Optional Hi-Temp insulator: Nylon 6T
- Insulator Colors: Black (White optional)
- Contacts: Phosphor Bronze
- Shell: Steel, Tin or Zinc plated
- Hardware: Brass, Nickel plated

##### Contact Plating:

Gold over Nickel underplate on contact area.

##### Electrical:

- Operating voltage: 250V AC / DC max.
- Current rating: 5 Amps max.
- Contact resistance: 20 mΩ max. initial
- Insulation resistance: 5000 MΩ min.
- Dielectric withstanding voltage: 1000V AC for 1 minute

##### Mechanical:

- Insertion force: 0.75 lbs max
- Extraction force: 0.44 lbs min

##### Temperature Rating:


- Operating temperature: -55°C to +105°C
- Soldering process temperature:
  - Standard insulator: 235°C
  - Hi-Temp insulator: 260°C

##### PACKAGING:

Anti-ESD plastic trays

##### APPROVALS AND CERTIFICATIONS:

UL Recognized & CSA Certified, File no. E224053

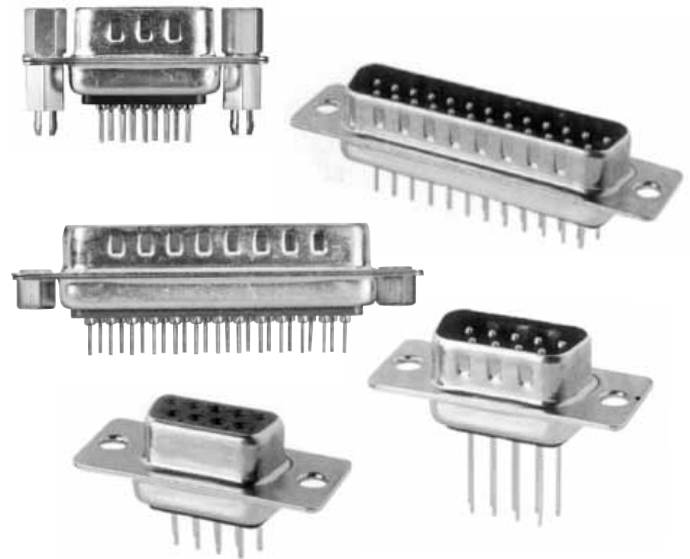

#### ORDERING INFORMATION



##### SHELL SIZE/ POSITIONS

- DE09 = 9 Position
- DA15 = 15 Position
- DB25 = 25 Position
- DC37 = 37 Position
- DD50 = 50 Position

##### CONTACT TYPE

- PT = Plug, Straight PCB Tail, Standard Profile
- ST = Socket, Straight PCB Tail, Standard Profile
- PE = Plug, Straight PCB Tail, High Profile
- SE = Socket, Straight PCB Tail, High Profile

##### TAIL LENGTH

- 1 = Standard tail length for .062"-.125" PCB's (E = .189")
- 2 = Wire wrap tail (E = .512")

##### MOUNTING OPTIONS

- BLANK = .120" Mounting Holes
- SL = Bottom side riveted #4-40 Clinch Nuts
- JS = Top side riveted #4-40 Jackscrews
- BL = Riveted #4-40 Internal Threaded Standoffs with Boardlocks
- R = Riveted Round Jack Screws
- JSL = Bottom side riveted #4-40 Clinch Nuts with Jack Screws installed

##### OPTIONS:







Add designator(s) to end of part number

EMI = Ferrite filtered version for EMI / RFI suppression (Page 114)

HT = Hi-Temp insulator for hi-temp soldering processes up to 260°C



### MOUNTING OPTIONS

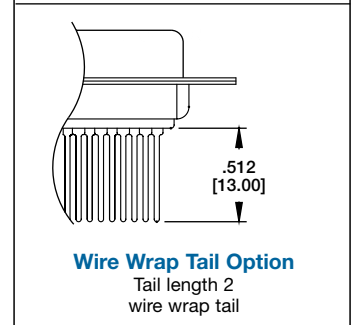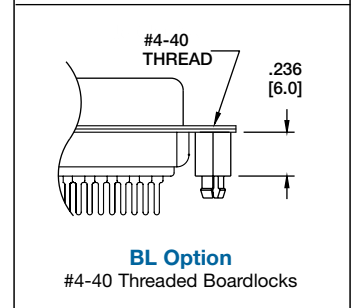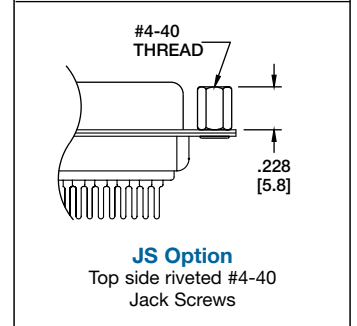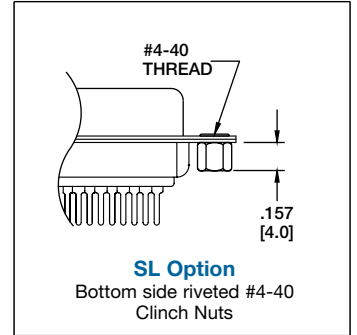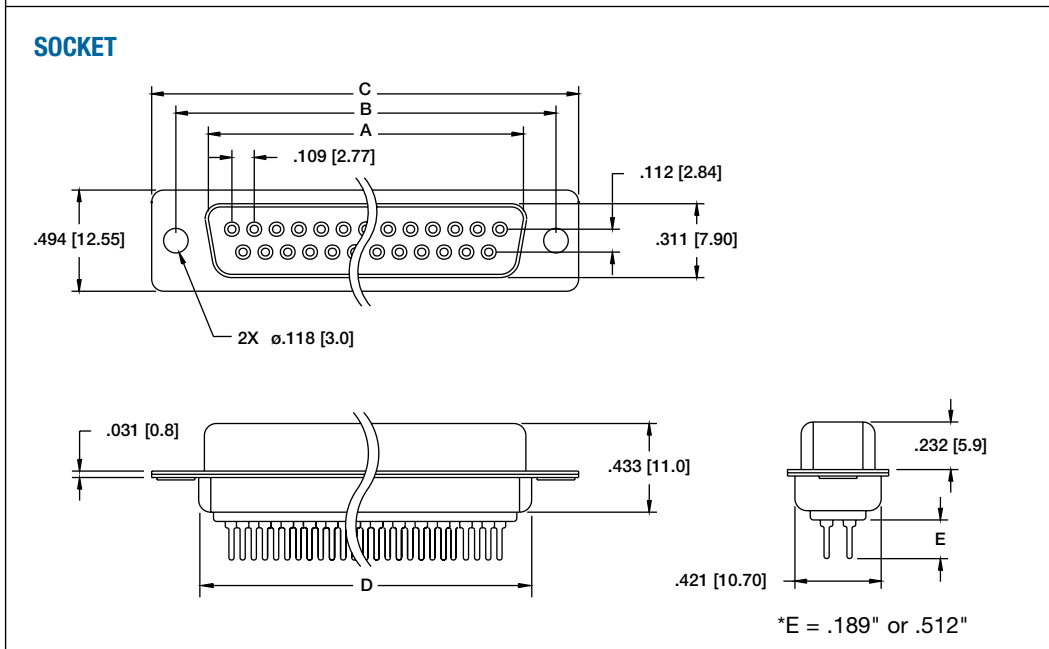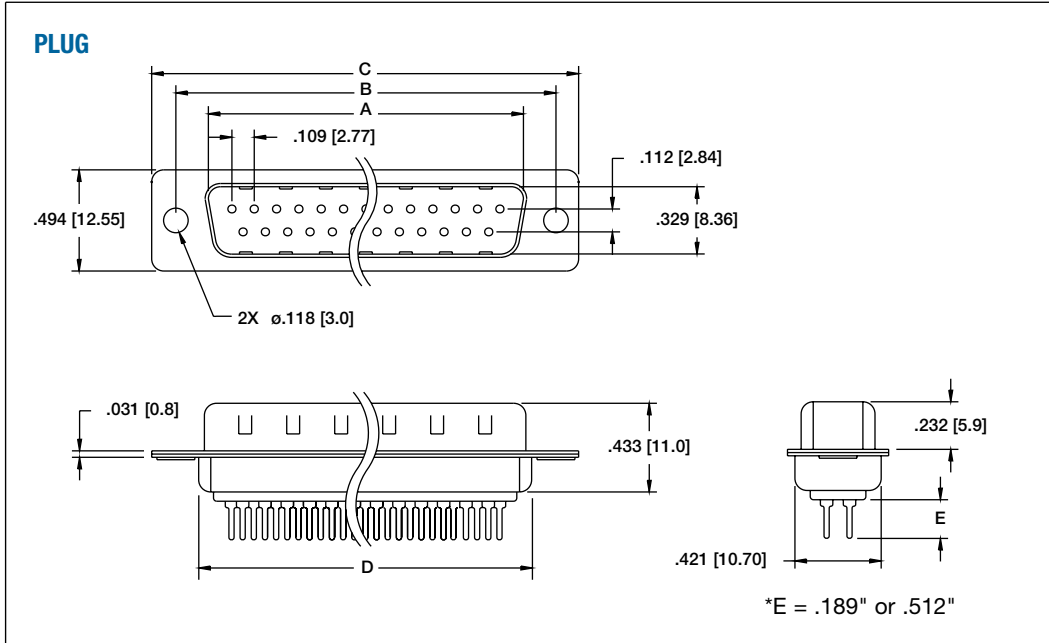

Unit: Inch [mm]

Positions	PLUG	SOCKET	DIMENSIONS		
	A	A	B	C	D
9	.666 [16.92]	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.756 [19.20]
15	.994 [25.25]	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]
25	1.534 [38.96]	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]
37	2.182 [55.43]	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]
50	2.079 [52.81]	2.064 [52.43]	2.406 [61.11]	2.637 [67.00]	2.169 [55.10]

