


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/1/04	
A		UPDATED SPECS	01/13/05	
B		REDRAWN	7/18/12	

APPROVED: _____
 DATE: _____ TITLE: _____

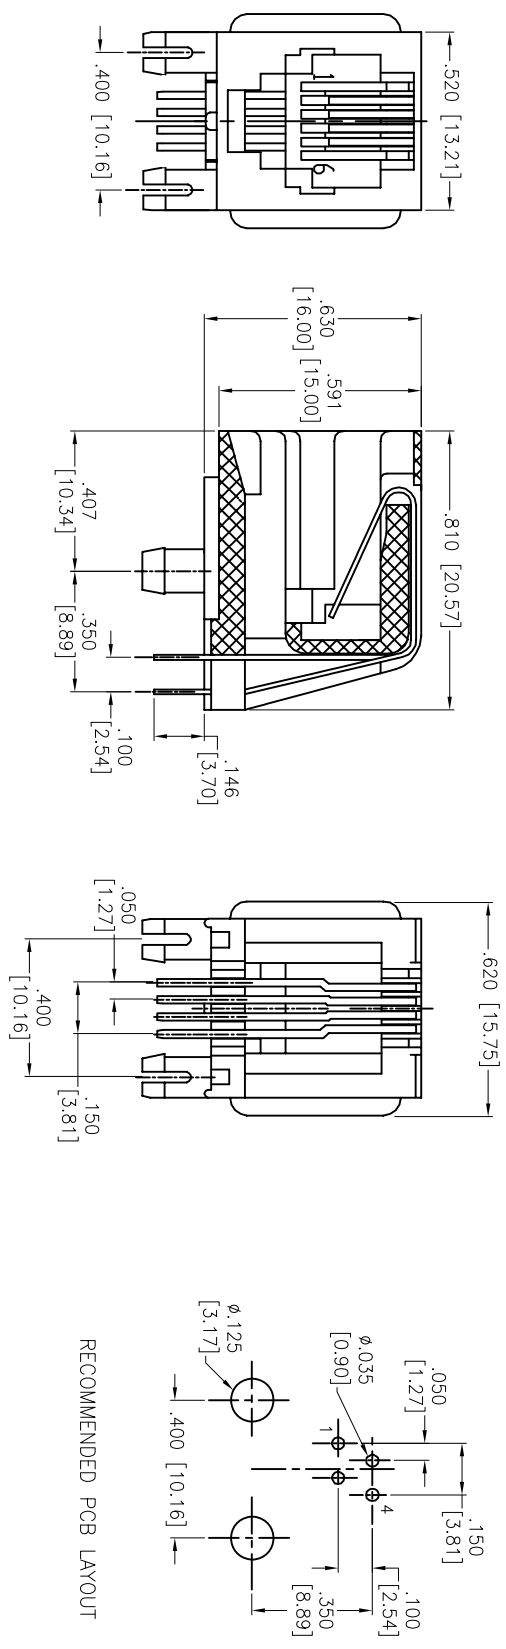

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, 6P4C
 RIGHT ANGLE, PCB

SPECIFICATIONS:
 Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Copper underplate on PCB tails
 (See chart for thickness)
 Electrical:
 Operating voltage: 125 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 45 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
APPROVALS	
DATE	DATE
SS	10/4/04
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MTJ-641X1	B
REF:	S0003C	SCALE: NTS
SHEET 1 OF 1		