




## Fused Terminal Blocks

### 1003 Si/ 3 DS GW

screwklemme, 3 pole, wire protector (DS): yes, cross-section rating: 4.0 mm<sup>2</sup>, voltage rating: 500 V, current rating: 16 A

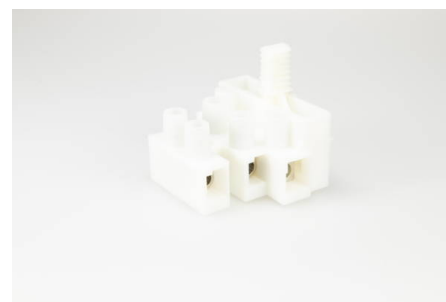

### Order Info

|                                    |   |
|------------------------------------|---|
| <b>reference number (ref. no.)</b> | 1713G3  |
| <b>Applications</b>                | Lighting, Electrical Appliances, Transformers |
| <b>PU</b>                          | 200   |
| <b>EAN</b>                         | 4028012131464                                 |

### Type

|                                |                     |
|--------------------------------|---------------------|
| <b>type</b>                    | screwklemme         |
| <b>number of poles</b>         | 3 pole              |
| <b>clamping units per pole</b> | 1                   |
| <b>colour</b>                  | natural             |
| <b>cross-section rating</b>    | 4.0 mm <sup>2</sup> |
| <b>wire protector (DS)</b>     | yes                 |

### Technical Data

|  |                     |
|--|---------------------|
| <b>voltage rating</b>                      | 500 V               |
| <b>current rating</b>                      | 16 A                |
| <b>insulating material</b>                 | PA 6.6-GW           |
| <b>contact material</b>                    | brass               |
| <b>core cross-section min.</b>             | 0.5 mm <sup>2</sup> |
| <b>core cross-section max.</b>             | 4.0 mm <sup>2</sup> |
| <b>flammability rating</b>                 | V-2                 |
| <b>max. Ambient Temperature Operation</b>  | 85 °C               |
| <b>type of conductor solid</b>             | yes                 |
| <b>type of conductor flexible</b>          | yes                 |
| <b>type of conductor stranded</b>          | yes                 |
| <b>stripping length</b>                    | 7.5-8.0 mm          |
| <b>Assembly Contact Screw</b>              | 0.8x4.0 / ⚙ 0.8 Nm  |
| <b>Type of Conductor Solid External</b>    | yes                 |
| <b>Type of Conductor Flexible External</b> | yes                 |
| <b>Type of Conductor Stranded External</b> | yes                 |
| <b>Type of Conductor Solid Internal</b>    | yes                 |
| <b>Type of Conductor Stranded Internal</b> | yes                 |

|  |   |
|--|---|
| <b>Type of Conductor Flexible Internal</b> | yes   |
| <b>Approbation EN60127</b>                 | 1003Si_EN60127_20011114_20170425_VDE_HA136499_web.pdf                     |
| <b>Approbation UL</b>                      | 503Si_1003Si_19961021_20100409_UL_E63492_1-14_Description_                |
| <b>Approbation CSA</b>                     | Schraub Steck Schraubenlos SI Klemme_20160429_CSA_70076573_Report_web.pdf |

## Accessories

|                |        |
|----------------|--------|
| <b>ZEL 110</b> | 196420 |
|----------------|--------|