




## Fused Terminal Blocks

### 1003 SI/ 4 DS GW

screwklemme, 4 pole, wire protector (DS): yes, cross-section rating: 4.0 mm<sup>2</sup>, voltage rating: 500 V, current rating: 16 A

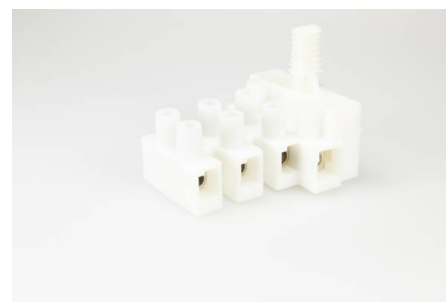

### Order Info

<b>reference number (ref. no.)</b>	1713G4
<b>Applications</b>	Lighting, Electrical Appliances, Transformers
<b>PU</b>	100
<b>EAN</b>	4028012117970

### Type

<b>type</b>	screwklemme
<b>number of poles</b>	4 pole
<b>clamping units per pole</b>	1
<b>colour</b>	natural
<b>cross-section rating</b>	4.0 mm <sup>2</sup>
<b>wire protector (DS)</b>	yes

### Technical Data

<b>voltage rating</b>	500 V
<b>current rating</b>	16 A
<b>insulating material</b>	PA 6.6-GW
<b>contact material</b>	brass
<b>core cross-section min.</b>	0.5 mm <sup>2</sup>
<b>core cross-section max.</b>	4.0 mm <sup>2</sup>
<b>flammability rating</b>	V-2
<b>max. Ambient Temperature Operation</b>	85 °C
<b>type of conductor solid</b>	yes
<b>type of conductor flexible</b>	yes
<b>type of conductor stranded</b>	yes
<b>stripping length</b>	7.5-8.0 mm
<b>Assembly Contact Screw</b>	0.8x4.0 / ⚙ 0.8 Nm
<b>Type of Conductor Solid External</b>	yes
<b>Type of Conductor Flexible External</b>	yes
<b>Type of Conductor Stranded External</b>	yes
<b>Type of Conductor Solid Internal</b>	yes
<b>Type of Conductor Stranded Internal</b>	yes

<b>Type of Conductor Flexible Internal</b>	yes
<b>Approbation EN60127</b>	1003Si_EN60127_20011114_20170425_VDE_HA136499_web.pdf
<b>Approbation UL</b>	503Si_1003Si_19961021_20100409_UL_E63492_1-14_Description_
<b>Approbation CSA</b>	Schraub Steck Schraubenlos SI Klemme_20160429_CSA_70076573_Report_web.pdf

## Accessories

<b>ZEL 110</b>	196420
----------------	--------