


SMD Connectors

SMDflat 345 KU/ 2

connecting link, 2 pole, current rating: 6 A, voltage rating: 250 V

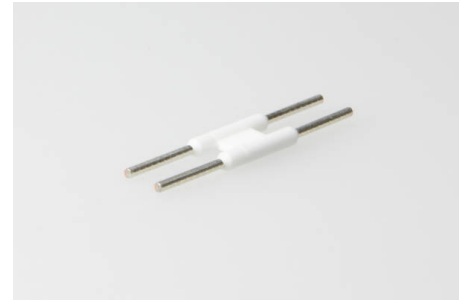

Order Info

reference number (ref. no.)	351152
Applications	Lighting
PU	500
EAN	4028012113804

Type

type	connecting link
number of poles	2 pole
colour	white

Technical Data

voltage rating	250 V
current rating	6 A
insulating material	PA 6
contact material	copper
flammability rating	V-2
max. Ambient Temperature Operation	105 °C
lower limit temperature	-30 °C
upper limit temperature	105 °C