REV.	DATE	DESCRIPTION
NC	07/23/01	INITIAL RELEASE

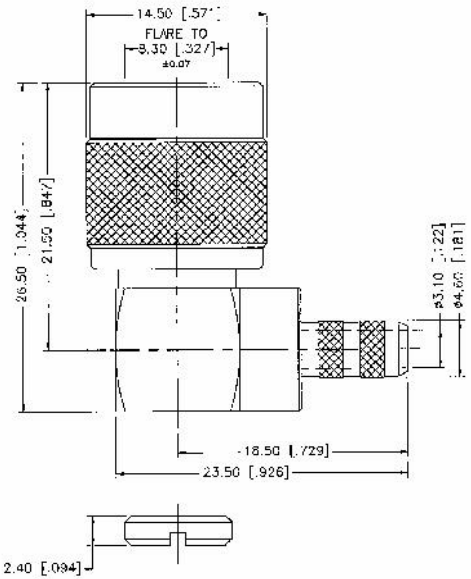





RECOMMENDED CABLE STRIPPING DIM'S
FOR RG-CABLE



RECOMMENDED CABLE STRIPPING DIM'S
FOR 6 GHz PERFORMANCE CABLE WITH FOIL BRAID.

ELECTRICAL:

A) IMPEDANCE: 50ohms
B) FREQUENCY RANGE: DC - 6 GHz
C) VSWR (RETURN LOSS): 1.4 (15.5db), MAX.
D) DIELECTRIC WITHSTANDING VOLTAGE:
1500 VRMS, MIN.

NOTES:

1. CRIMPED FERRULE HEX SIZE .213"
2. SOLDER CENTER CONTACT.

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5	NUT	BRASS	NICKEL	1
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR REFERENCE PURPOSES ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.3 ~ 6mm ± 0.20mm
6 ~ 30mm ± 0.30mm
30 ~ 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 ~ .315 = ± 0.007"
.315 ~ 1.180 = ± 0.015"
1.180 ~ 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	07/23/01
CHECKED		
ISSUED		
SHEET	1 OF 1	
DAD FILE	C:/122/122140RP.DWG	

Amphenol Connex

PART DESCRIPTION:

TNC REVERSE POLARITY R/A CRIMP PLUG
(FOR RG-58/U, 58C/U CABLE)

PART NO. 122140RP

DWG. NO. 122140RP.DWG | REV. NC | SIZE A | SCALE NA