
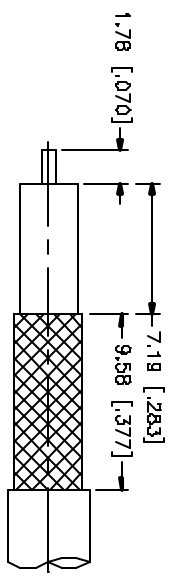
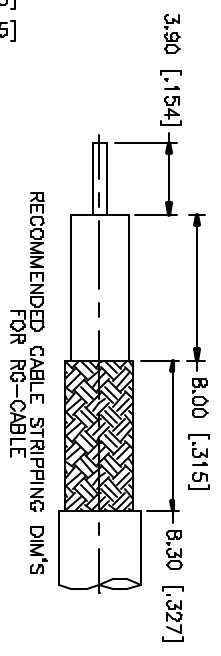



REV.	DATE	DESCRIPTION
NC	07/22/04	INITIAL RELEASE

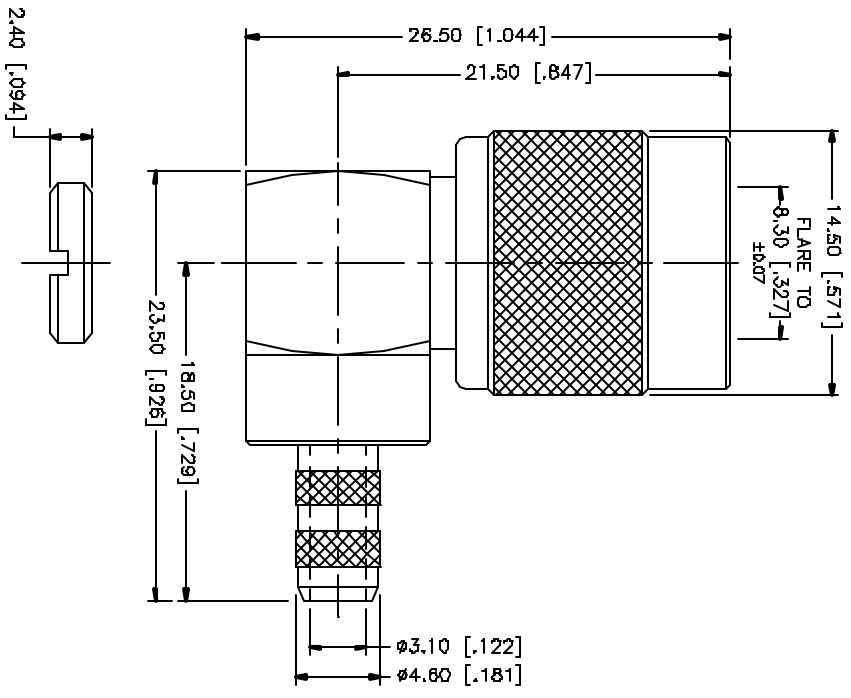

- NOTES:
1. CRIMPED FERRULE HEX SIZE .213"
 2. SOLDER CENTER CONTACT.

REV.	DATE	DESCRIPTION
8		
7		
6		
5		
4		
3		
2		
1		

DESCRIPTION	MATERIAL	FINISH	QTY
1	BRASS	NICKEL	1
2	TEFLON	NATURAL	1
3	PHOS. BRONZE	GOLD	1
4	COPPER	NICKEL	1
5	BRASS	NICKEL	1
6			
7			
8			

APPROVALS	DATE
DESIGN G.R.S.	07/22/04
CHECKED	
ISSUED	
SHEET 1 OF 1	

UNLESS OTHERWISE SPECIFIED
PERMITS FOR DIMENSIONS IN MILLIMETERS AND FOR DIMENSION TOLERANCES SPECIFIED THEREIN.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 3.0mm ± 0.20mm
3.0 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 ± 0.007"
.315 - 1.180 ± 0.015"
1.180 - 4.724 ± 0.020"
DO NOT SCALE DRAWING

APPENDIX	DATE
C:/122/122140RP.DWG	

PART DESCRIPTION	PART NO.
TNC REVERSE POLARITY R/A CRIMP PLUG (FOR RG-58/U, 58C/U CABLE)	122140RP

DWG. NO.	REV.	NC	SIZE	SCALE
122140RP.DWG			A	NA

Amphenol Connex