REV.	DATE	DESCRIPTION
A	02/06/00	UPDATE TITLE/ INSULATOR MATERIAL

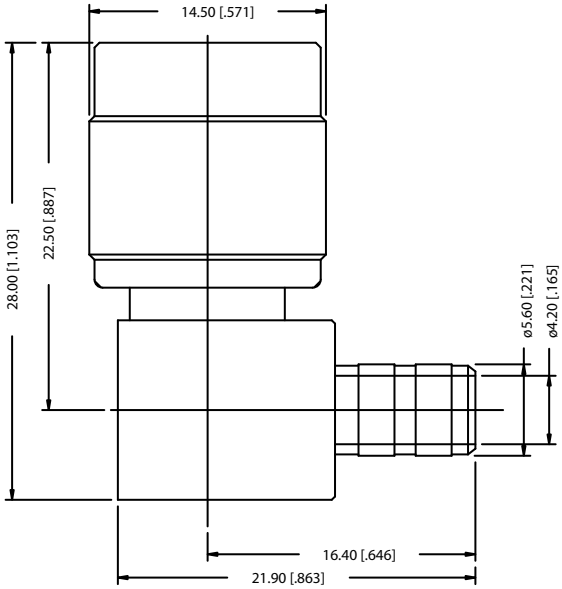



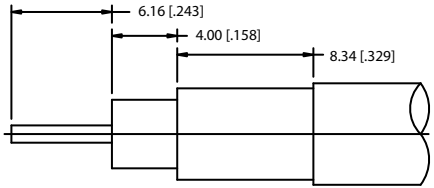

RECOMMENDED
CABLE STRIPPING DIM'S

	DESCRIPTION	MATERIAL	FINISH
1	BODY	BRASS	NICKEL
2	INSULATOR	TEFLON	NATURAL
3	CONTACT PIN	BRASS	GOLD
4	FERRULE	COPPER	NICKEL
5	COVER	BRASS	NICKEL
6			
7			
8			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES
FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	02/06/00
CHECKED		
ISSUED		

Connex Connector Corporation

TITLE
TNC R/A CRIMP PLUG
(FOR BELDEN RG-8/X TIMES LMR-240MA CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	122414.DWG	A

SCALE	PART NO.	SHEET
NA	122414	1 OF 1