


REV.	DATE	ECR NO.	DESCRIPTION
A	04/31/03	-	UPDATE DRAWING FORMST
B	11/13/06	-	MODIFY BARREL OD. TO 2.70mm
C	04/27/08	100011	REVISE FERRULE I.D. TO 3.20mm AND O.D. TO 3.9mm

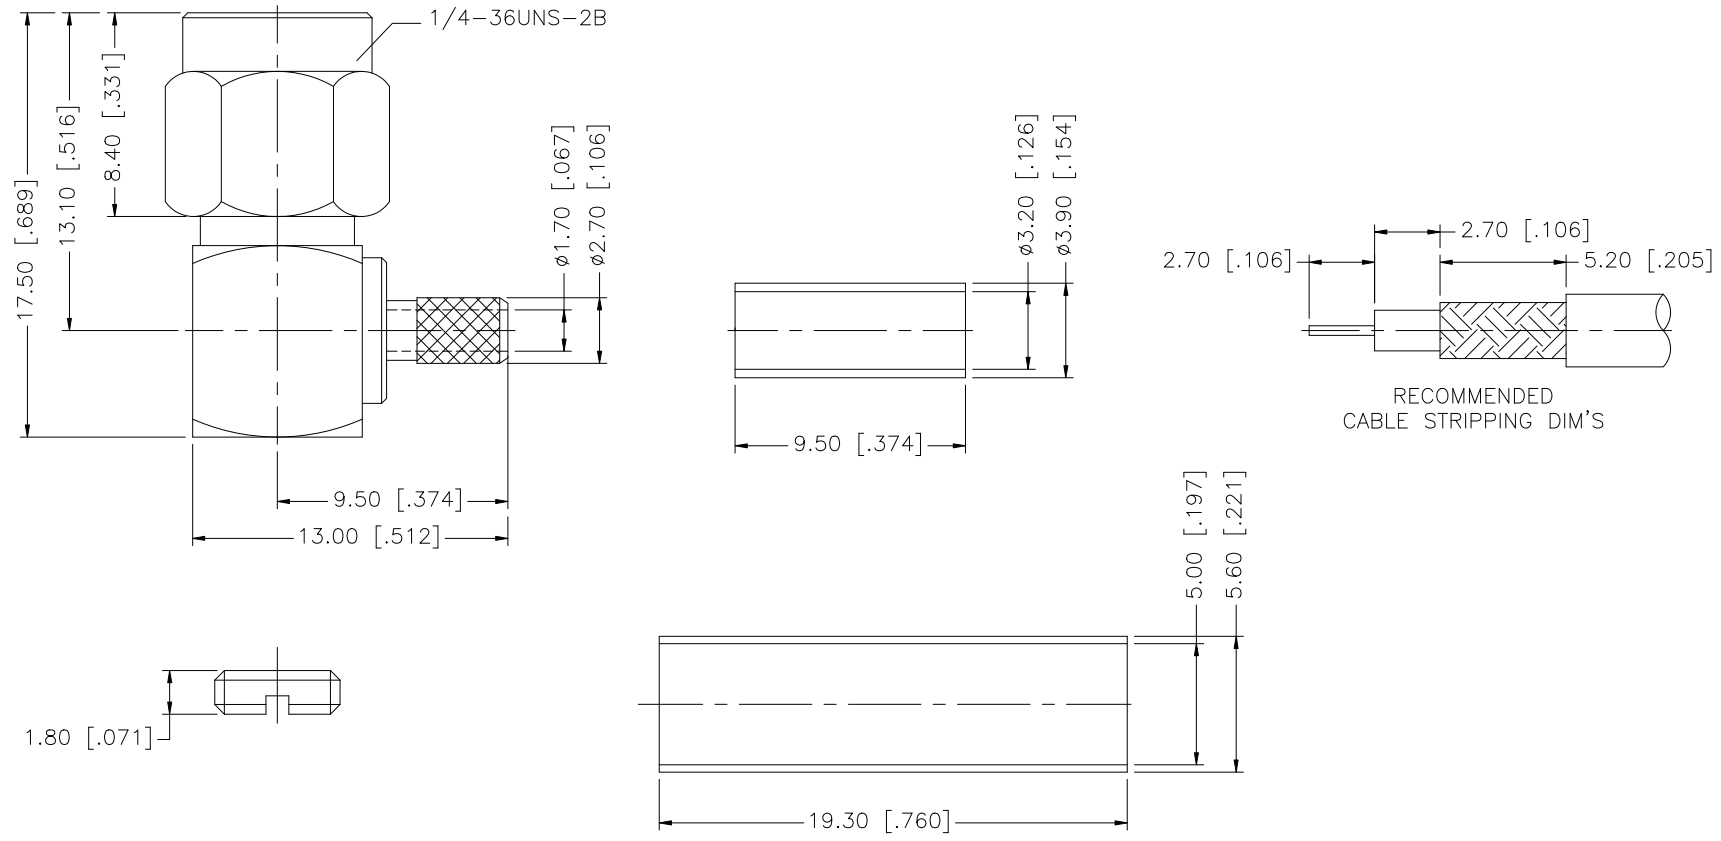

NOTES:  
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE
8									
7	HEAT SHRINK TUBE		1						
6	FERRULE	COPPER	GOLD	1					
5	GASKET	SILICONE	RED	1					
4	CONTACT PIN	BRASS	GOLD	1					
3	INSULATOR	TEFLON	NATURAL	1					
2	HOUSING W/BARREL	BRASS	GOLD	1					
1	SHELL	BRASS	GOLD	1					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm$ 0.20mm 8 - 30mm $\pm$ 0.40mm 30 - 120mm $\pm$ 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = $\pm$ 0.007" .315 - 1.180 = $\pm$ 0.015" 1.180 - 4.724 = $\pm$ 0.020"					APPROVALS DRAWN G.R.S. CHECKED ISSUED SHEET 1 OF 1	DATE 04/27/08	<b>Amphenol Connex</b> PART DESCRIPTION SMA R/A CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE) PART NO. 132123		
DWG. NO. 132123.DWG						REV. C	SIZE A	SCALE NA	