



REV.	DATE	ECR NO.	DESCRIPTION
NC	04/17/00	-	INITIAL RELEASE
A	07/21/05	-	UPDATE DRAWING FORMAT
B	04/28/08	-	REVISE BARREL O.D. TO 2.69 mm, FERRULE I.D. TO 3.2 mm
C	02/25/10	2027	THE FERRULE LENGTH WAS CHANGED TO 7 FROM 9.5.

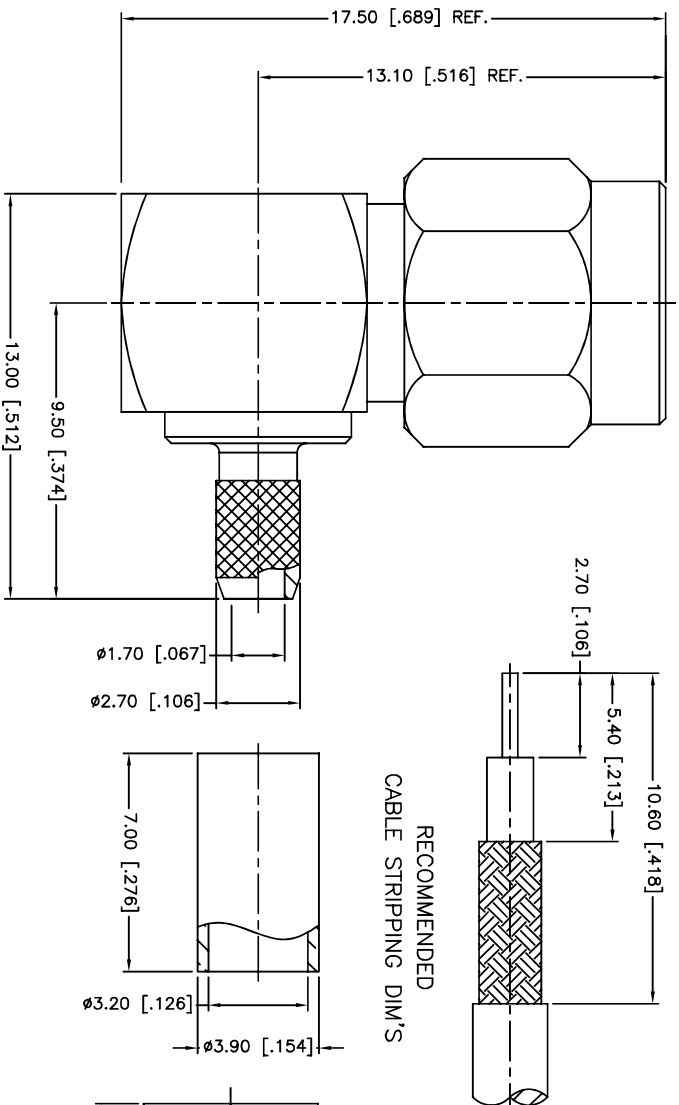

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER

QTY	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING
1	HEAT SHRINK TUBING	BRASS	BLACK	1	
1	FERRULE	BRASS	GOLD	1	
1	COVER	BRASS	GOLD	1	
1	GASKET	SILICONE	RED	1	
1	RETAINER RING	SUS 304	NATURAL	1	
1	CONTACT PIN	BERYLLIUM COPPER	GOLD	1	
1	INSULATOR	PTEE	NATURAL	1	
1	HOUSING WITH BARREL	BRASS	GOLD	1	
1	SHELL	BRASS	GOLD	1	
	DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.0007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

APPROVALS: DRAWN C. WANG DATE 02/25/10
CHECKED
ISSUED
SHEET 1 OF 1

PART DESCRIPTION: SMA REVERSE POLARITY R/A CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
PART NO.: 132123RP

QAD FILE: C:/CONNEX/132123RP.DWG
DWG. NO.: 132123RP.DWG
REV. C
SIZE A
SCALE NA