| REV. | DATE | DESCRIPTION |
|---|---|---|
| NC | 06/08/98 | INITIAL RELEASE |
| A | 06/25/06 | UPDATE DRAWING FORMAT, REVISE PLATING TO NEXCOTE |
| B | 12/19/06 | REVISE NOTE 2. |

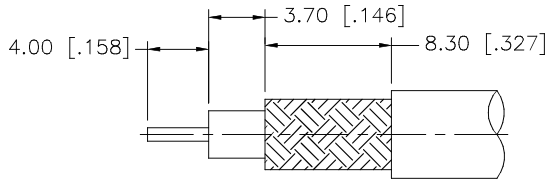


RECOMMENDED
CABLE STRIPPING DIM'S

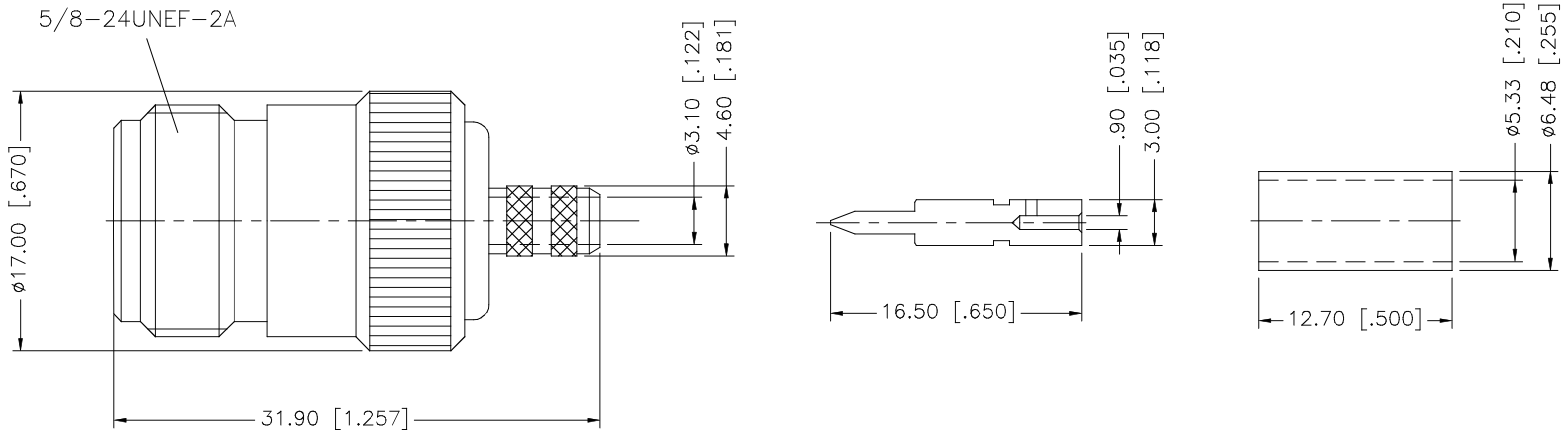


NOTE:

1. CRIMPED FERRULE HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN HEX. CRIMP SIZE .100"

| | | | | |
|---|---|---|---|---|
| 8 | | | | |
| 7 | | | | |
| 6 | | | | |
| 5 | | | | |
| 4 | FERRULE | COPPER | NEXCOTE | 1 |
| 3 | CONTACT PIN | BRASS | GOLD | 1 |
| 2 | INSULATOR | TEFLON | NATURAL | 1 |
| 1 | BODY | BRASS | NEXCOTE | 1 |
| | DESCRIPTION | MATERIAL | FINISH | QTY |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS | DATE |
|---|---|
| DRAWN G.R.S. | 12/19/06 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |

CAD FILE C:/172/172103RP.DWG

**Amphenol Connex**

PART DESCRIPTION
N REVERSE POLARITY CRIMP JACK
(FOR RG-58/U CABLE)

PART NO. 172103RP

| DWG. NO. | REV. | SIZE | SCALE |
|---|---|---|---|
| 172103RP.DWG | B | A | NA |