REV.	DATE	DESCRIPTION
NC	07/31/96	INITIAL RELEASE
A	11/16/05	UPDATE DRAWING FORMAT

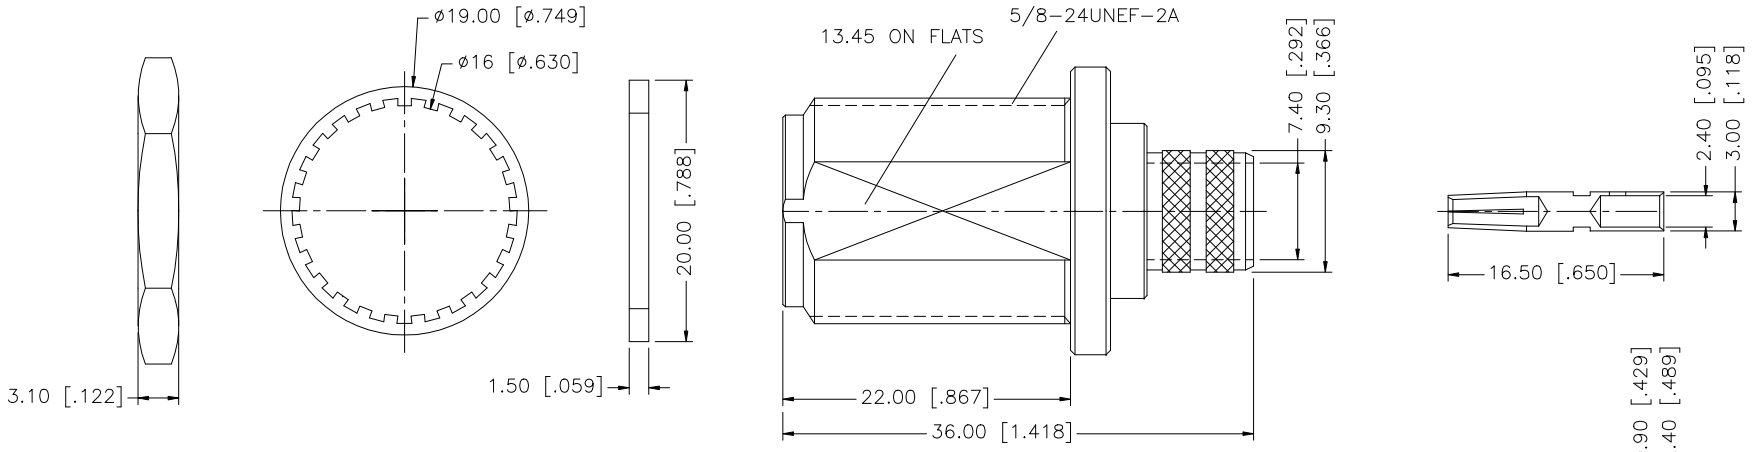



RECOMMENDED MOUNTING HOLE

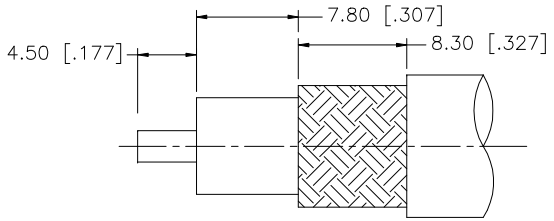

RECOMMENDED
CABLE STRIPPING DIMS.

NOTE:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .429"
2. HEX CRIMP SIZE .100"

8	FERRULE	COPPER	NEXCOTE	1
7	CONTACT PIN	PHOS. BRONZE	GOLD	1
6	HEX NUT	BRASS	NEXCOTE	1
5	LOCK WASHER	BRASS	NEXCOTE	1
4	GASKET	SILICONE	RED	1
3	BARREL	BRASS	NEXCOTE	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	11/16/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/172/172108.DWG

Amphenol Connex

PART DESCRIPTION
N BULKHEAD CRIMP JACK
(FOR 8/U, 8A/U 213/U CABLE)

PART NO. 172108

DWG. NO.	REV.	SIZE	SCALE
172108.DWG	NC	A	NA