



REV.	DATE	DESCRIPTION
A	08/25/04	MODIFY COUPLING NUT PLATING

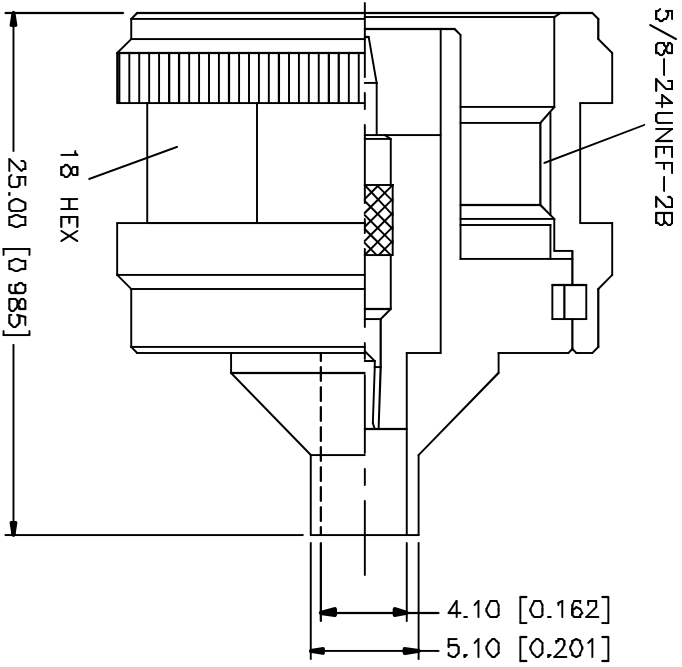

REV.	DATE	DESCRIPTION
B		
7		
6		
5		
4		
3		
2		
1		

DESCRIPTION	MATERIAL	FINISH	QTY
COUPLING NUT	BRASS	NEOXDTE	1
GASKET	SILICONE	RED	1
CONTACT PIN	PHOS. BRONZE	GOLD	1
INSULATOR	TEFLON	NATURAL	1
BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLING ARE:
0.5 - .8mm ± 0.20mm
.8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCH ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

APPROVALS	DATE
DAWN G.R.S.	08/25/04

CAD FILE	DWG NO	REV.	SIZE	SCALE
C/172/172133-11.DWG	172133-11.DWG	A	A	NA

Amphenol Connex

N DIRECT SOLDER PLUG
(FOR .141" SEMI RIGID CABLE)

PART NO: 172133-11