



THIRD ANGLE PROJ.	REV	DESCRIPTION	DATE	ECO	APPR
	A	RELEASED TO MFG.	21-Oct-10	48164	TD

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASED TO MFG.	21-Oct-10	48164	TD

- NOTES:
- MATERIALS AND FINISHES:
BODIES - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE, NATURAL
 - ELECTRICAL:
A. IMPEDANCE: 75 OHM
B. FREQUENCY RANGE: DC - 3 GHz
C. RETURN LOSS: 30 dB MIN @ 3 GHz
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
 - PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, APH-HDBNCJ-J, AND DATE CODE"

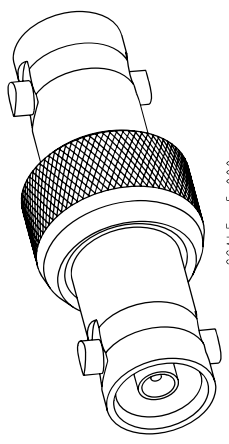

SCALE 5.000

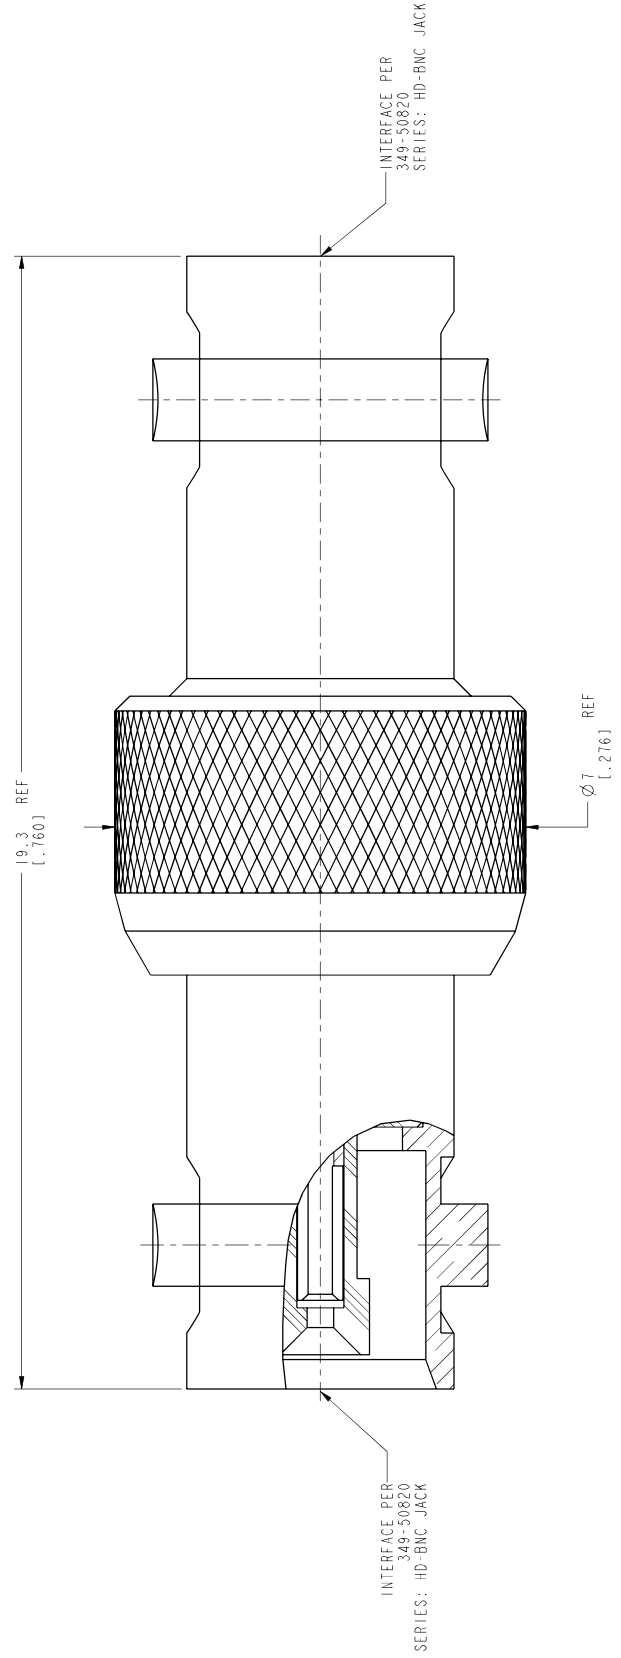

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: ±0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±1°		DRAWN T.DENG		DATE 21-Oct-10	TITLE ADAPTOR, 75 OHM HD-BNC, JACK TO JACK		Amphenol RF Danbury CT USA, Taiwan, Shenzhen, China www.amphenolrf.com		
SEE NOTES		ENGINEER BALAJI M		DATE 16-Mar-10	APPROVED S.HSIEH		DRAWING NO. APH-HDBNCJ-J		
REFERENCE EAR # 3987		APPROVED S.HSIEH		DATE 22-Oct-10	SCALE: 12.0:1.0 SHEET 2 OF 2		ITEM NO. APH-HDBNCJ-J		
CONFIGURATION LEVEL:		CAD FILE		DWG SIZE B		REV A		PART NO. APH-HDBNCJ-J	
FINISH		Root Finish/HD-BNC/APH-HDBNCJ-J							

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are intended. Amphenol Corp., or to any other person for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.