
## **PRODUCT DATA DRAWING**

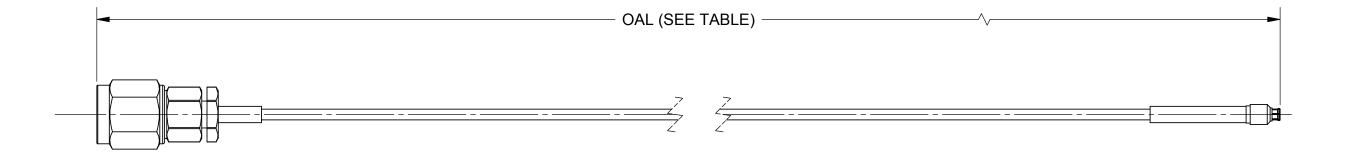

## MATERIAL:

CONNECTORS:	2.4MM PLUG (SF1611-60001)	

SMPS JACK (3821-40001)

CABLE: FLEXIBLE Ø.047 CABLE

SHRINK TUBING: M23053/5

## **PERFORMANCE:**

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 50.0 GHz

MATERIAL: SEE NOTES FINISH: SEE NOTES SURFACE AREA: N/A	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X* ±1°0' X*X' ±15' DECIMAL: X ±.030 XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES 1005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63. MIL-STD-10. 6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 TLR.		۷ <sup>TITLE:</sup> 2.4mm	2.4mm PLUG TO SMPS JACK FOR	
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING	PER ASME Y14.5M - 1994 THIRD ANGLE PROJECTION	7) REMOVE ALL BURRS	SJ 04/01/19		LEXIBLE Ø.047 CABLE ASSEMBLY	
IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF		CHECKED:	GPF 04/01/19	SIZE CAGE CODE <b>B</b> 95077	DWG. NO. 7016-0074-0075	
SV MICROWAVE, INC IS PROHIBITED.		APPROVED:	GPF 04/01/19	SCALE: 2:1	SHEET 1 OF 1	

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 42977	04/19	GPF

SV P/N	OAL
7016-0074	6.000
7016-0075	12.000