


UNC #4-40 Hexscrew




Pin Out

| 9P-Male | 9P-Male |
|---|---|
| 1 | 1 |
| 2 | 2 |
| 8 | 8 |
| 9 | 9 |
| G | G |

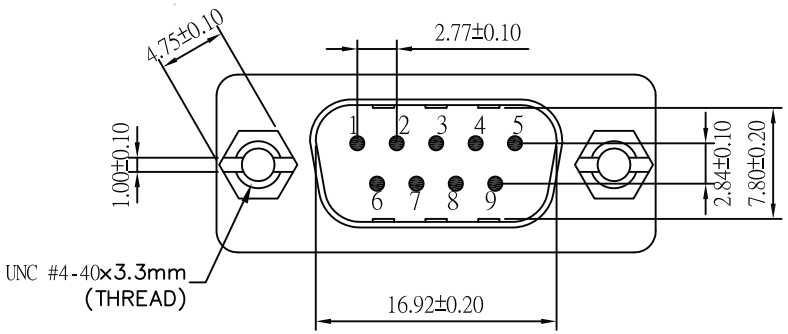





**Material:**

- Insulator: PBT Glass fibre reinforced UL 94 V0
- Contact: Brass
- Contact plating: Gold plated over nickel
- Shell: Tin plated shell
- Yellow label with black characters

Unit: MM
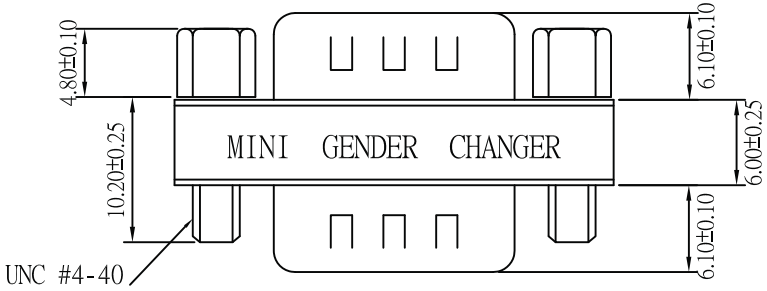
| | |
|---|---|
| Scale | 1:1 |
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ±3° |
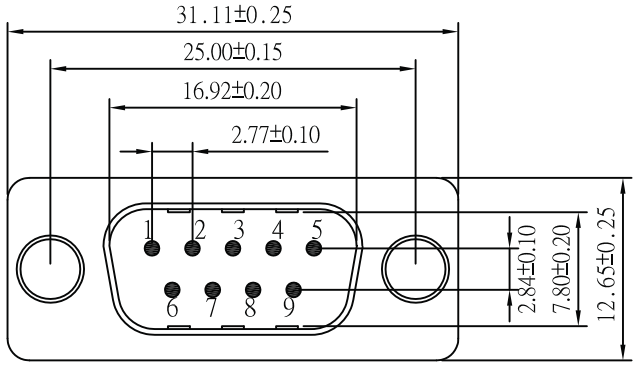
| Modification | Date | Name |
|---|---|---|
| | | |

| | | Name |
|---|---|---|
| Drawn | 11.22.11 | Chappell |
| Approved | | |

**Item No.** **AB410-R**

**Title** Mini Gender Changer - D-Sub 9 Pin Male <=> D-Sub 9 Pin Male

Drawing No. **rev00**

Replace | Sheet

RoHS Complaint

ASSMANN WSW components