
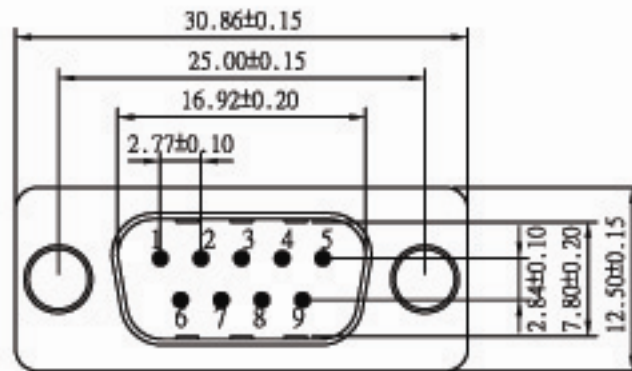
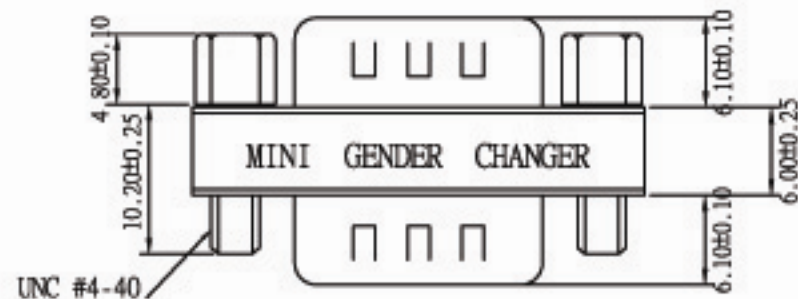




UNC #4-40 Hexscrew

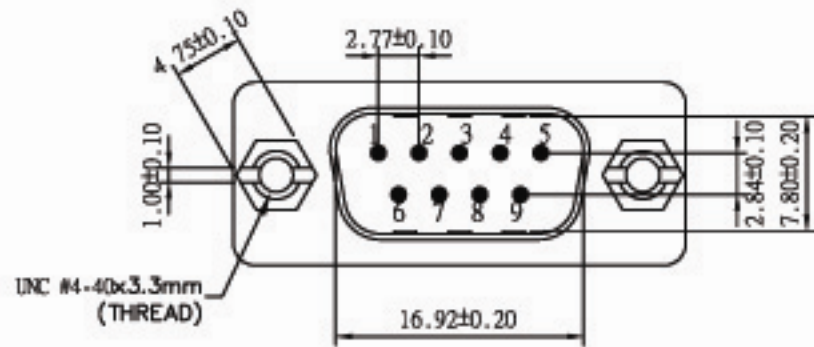

DGC 09 M/M GENDER CHANGER

PIN OUT: 9Male

9Male

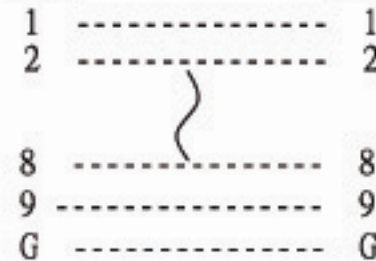

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 ASSMANN ELECTRONICS

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C — +105°C

				Edition	ASSMANN Electronics, Inc.			
				A2	PART NO.		DWG NO.	DATE
				SCALE	AB410-R		TD0001-03	30/Jun-2003
				2:1	DRAWN		CHECKED	APPRD
				UNIT	Fu Hao			
				mm	PAGE			
				1/1	UNLESS OTHERWISE SPECIFIED TOLERANCES:			
					0.50: ±0.20			
					1.00: ±0.15			
					2.00: ±0.05			
Customer	REVISION	DESCRIPTION	DATE					
	2	修改螺絲(螺絲5.2mm改為6.2mm)	2003/06/30					
	1	修改貼紙(R.O.C. PATENT 64341 <small>ASSMANN ELECTRONICS</small> 改為MINI GENDER CHANGER)	2001/11/30					