

# THT Labels: PermaSleeve® Wire Marking Sleeves

www.BradyID.com

## B-342 PermaSleeve® PS Polyolefin Wire Marking Sleeves:

Single-Sided Printable, 2" Sleeve Width (Continued from previous page.)

Part Number	Sleeves Per Roll	Pieces Per Roll	Approx. Wire Gauge	Range of Wire Diameter Inch (mm)		Supplied Diameter Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeve Width Inch (mm)	Rec. Printer	Rec. Ribbon
				Min.	Max.						
PS-500-2-WT	500	500	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-500-2-WT-**	500	--	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-500-2-WT-S	250	250	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-500-2-WT-S-**	250	--	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-500-2-*S	250	250	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-500-2-*S-**	250	--	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.7)	.025 (0.6) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-750-2-WT	250	250	6 to 4/0	0.250 (6.6)	0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-750-2-WT-**	250	--	6 to 4/0	0.250 (6.6)	0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-750-2-WT-S	100	100	6 to 4/0	0.250 (6.6)	0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-750-2-WT-S-**	100	--	6 to 4/0	0.250 (6.6)	0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-750-2-*S	100	100	6 to 4/0	0.250 (6.6)	0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-750-2-*S-**	100	--	6 to 4/0	0.250 (6.6)	0.700 (17.8)	0.750 (19.0)	0.250 (6.4)	.025 (0.6) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-1000-2-WT	250	250	2 to 0.950 dia.	0.333 (8.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-1000-2-WT-**	250	--	2 to 0.950 dia.	0.333 (8.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-1000-2-WT-S	100	100	2 to 0.950 dia.	0.333 (8.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-1000-2-WT-S-**	100	--	2 to 0.950 dia.	0.333 (8.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-1000-2-*S	100	100	2 to 0.950 dia.	0.333 (8.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-1000-2-*S-**	100	--	2 to 0.950 dia.	0.333 (8.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	.036 (0.9) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-1500-2-WT	250	250	N/A	0.500 (12.7)	1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-1500-2-WT-**	250	--	N/A	0.500 (12.7)	1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-1500-2-WT-S	100	100	N/A	0.500 (12.7)	1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-1500-2-WT-S-**	100	--	N/A	0.500 (12.7)	1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602
PS-1500-2-*S	100	100	N/A	0.500 (12.7)	1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	2.000 (50.8)	PR Plus, IP	R4300/ R6602
PS-1500-2-*S-**	100	--	N/A	0.500 (12.7)	1.400 (35.6)	1.500 (38.1)	0.500 (12.7)	.035 (0.9) ± .003 (0.07)	--	PR Plus, IP	R4300/ R6602

### \*Choosing Your PermaSleeve Color

You may also choose to order your PermaSleeves PS 2" width sleeves in the colors listed below. Replace the singular asterisk (\*) with the abbreviation of the desired color.

Example: PS-094-2-\*S becomes PS-094-2-YL-S

#### Available Stock Colors:

BK = Black      GR = Green      PK = Pink      YL = Yellow  
 BL = Blue      GY = Gray      RD = Red      WT = White  
 BR = Brown      OR = Orange      VT = Violet


### \*\* Choosing Your PermaSleeve Pieces (optional):

While 1 marker per sleeve is standard, you may also choose to have each sleeve slit multiple times to produce multiple pieces. Replace the double asterisks (\*\*) in the part number to fill in your desired pieces per marker.

Example: PS-187-2-WT-S-\*\* becomes PS-187-2-WT-S-4  
 This "4" means that this 2.000" sleeve is slit into four 0.500" pieces.

**Standard Option:**  
1 marker per sleeve

**Other Available Slit Options:**  
(Contact Brady Customer Service for availability)  
2, 3 or 4 markers per sleeve

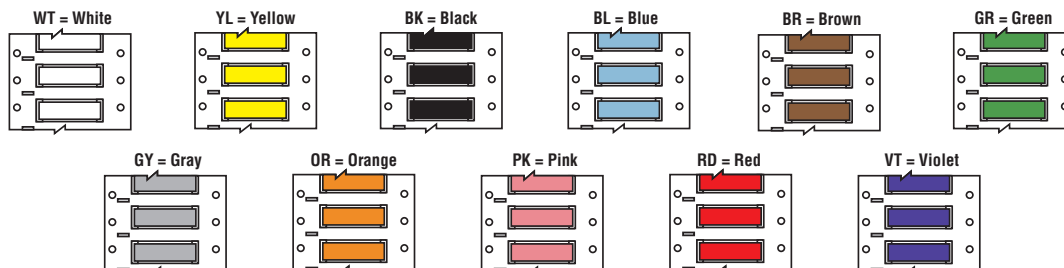

See all benchtop printer ribbon parts on page 152 and full material descriptions on pages 164-170.

Approx. wire gauge based on AWG for THHN wire.

1-888-272-3946 | www.BradyID.com