

THT Labels: PermaSleeve® Wire Marking Sleeves

www.BradyID.com

B-7642 PermaSleeve® HX Polyolefin Wire Marking Sleeves:

Single-Sided Printable, 1.5" Sleeve Width (Continued from previous page)

Part Number	Sleeves Per Roll	Pieces Per Roll	Approx. Wire Gauge	Range of Wire Diameter Inch (mm)		Supplied Diameter Inch (mm)	Recovered Diameter Inch (mm)	Recovered Wall Thickness Inch (mm)	Sleeve Width Inch (mm)	Rec. Printer	Rec. Ribbon
				Min.	Max.						
HX-750-150-WT	250	250	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-750-150-WT-**	250	--	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	--	PR Plus	R4300/ R6602
HX-750-150-*	250	250	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-750-150-*-**	250	--	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	--	PR Plus	R4300/ R6602
HX-750-150-WT-S	100	100	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-750-150-*S	100	100	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-750-150-WT-J	2,500	2,500	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-750-150-WT-J-**	2,500	--	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	--	PR Plus	R4300/ R6602
HX-750-150-*J	2,500	2,500	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-750-150-*J-**	2,500	--	2 to 4/0	0.375 (9.5)	0.700 (17.8)	0.750 (19.0)	0.374 (9.5)	0.030 (0.8) ± 0.003 (0.07)	--	PR Plus	R4300/ R6602
HX-1000-150-WT	250	250	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1000-150-WT-**	250	--	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	--	PR Plus	R4300/ R6602
HX-1000-150-*	250	250	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1000-150-*-**	250	--	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	--	PR Plus	R4300/ R6602
HX-1000-150-WT-S	100	100	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1000-150-*S	100	100	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1000-150-WT-J	2,500	2,500	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1000-150-WT-J-**	2,500	--	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	--	PR Plus	R4300/ R6602
HX-1000-150-*J	2,500	2,500	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1000-150-*J-**	2,500	--	2/0 to 0.950" dia.	0.450 (11.4)	0.950 (24.1)	1.000 (25.4)	0.500 (12.7)	0.035 (0.9) ± 0.005 (0.1)	--	PR Plus	R4300/ R6602
HX-1500-150-WT	250	250	N/A	0.750 (19.0)	1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1500-150-*	250	250	N/A	0.750 (19.0)	1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1500-150-WT-S	100	100	N/A	0.750 (19.0)	1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1500-150-*S	100	100	N/A	0.750 (19.0)	1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1500-150-WT-J	1,000	1,000	N/A	0.750 (19.0)	1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-1500-150-*J	1,000	1,000	N/A	0.750 (19.0)	1.400 (35.6)	1.500 (38.1)	0.752 (19.1)	0.040 (1.0) ± 0.006 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-2000-150-WT	100	100	N/A	1.000 (25.4)	1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-2000-150-*	100	100	N/A	1.000 (25.4)	1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-2000-150-WT-S	50	50	N/A	1.000 (25.4)	1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-2000-150-*S	50	50	N/A	1.000 (25.4)	1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-2000-150-WT-J	1,000	1,000	N/A	1.000 (25.4)	1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602
HX-2000-150-*J	1,000	1,000	N/A	1.000 (25.4)	1.900 (48.3)	2.000 (50.8)	1.000 (25.4)	0.045 (1.1) ± 0.007 (0.2)	1.500 (38.1)	PR Plus	R4300/ R6602

*Choosing Your PermaSleeve Color

While white, yellow and black are standard colors, you may special order your sleeves in the colors listed below. Replace WT or YL with the abbreviation of the desired color.

Example: HX-094-150-WT-4 becomes HX-094-150-RD-4

Standard Stock Colors:

WT = White
YL = Yellow
BK = Black

Special Order Colors:

(Contact Brady Customer Service for availability)

BK = Black GY = Gray RD = Red
BL = Blue OR = Orange VT = Violet
GR = Green

** Choosing Your PermaSleeve Pieces (optional):

While 1 marker per sleeve is standard, you may also choose to have each sleeve slit multiple times to produce multiple pieces. Replace the double asterisks (**) in the part number to fill in your desired pieces per marker.

Example: HX-187-150-WT-** becomes HX-187-150-WT-4


This "4" means that this 2.000" sleeve is slit into four 0.500" pieces.

Standard Option:

1 marker per sleeve

Other Available Slit Options:

2, 3 or 4 markers per sleeve

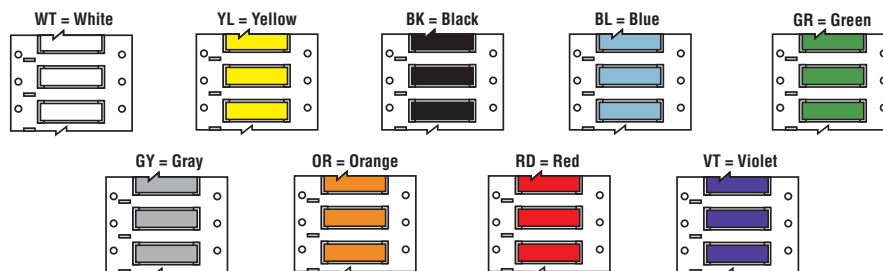

Note: White, yellow and black are standard. All other colors available as special order.

See all benchtop printer ribbon parts on page 152 and full material descriptions on pages 164-170.

Approx. wire gauge based on AWG for THHN wire.

1-888-272-3946 | www.BradyID.com