

PART NAME	LARGE NON-METALLIC ENCLOSURE (STYLE B)	PART No.	NBB-10253 & NBB-10273 & NBB-15253
-----------	--	----------	-----------------------------------

MATERIAL:
INDOOR RATED
 SOLID BODY & COVER _____ ABS/PC BLENDED PLASTIC
 UL94-5VB FLAMMABILITY RATING
 -40°C TO +70°C TEMPERATURE RANGE
 CLEAR COVER _____ POLYCARBONATE PLASTIC
 UL94-VD FLAMMABILITY RATING
 -40°C TO +70°C TEMPERATURE RANGE
 UV STABILIZED

OUTDOOR RATED
 SOLID BODY & COVER _____ PBT/PC BLENDED PLASTIC
 UL94-5VA FLAMMABILITY RATING
 -40°C TO +70°C TEMPERATURE RANGE
 UV STABILIZED

FINISH:
 BODY _____ LIGHT GRAY
 COVER _____ LIGHT GRAY OR CLEAR
 LATCHES & HINGES _____ NON-METALLIC
 WALL MOUNTING BRACKETS _____ STAINLESS STEEL

INTERNAL HINGED PANEL MOUNTING BRACKETS, STAINLESS STEEL LOCKING HASP, AIR AND MOISTURE VENTS AND GALVANIZED STEEL INTERNAL PANEL ARE NOT INCLUDED, BUT CAN BE PURCHASED SEPARATELY.


NOTE: UNIT COMES COMPLETE WITH FOUR (4) STAINLESS STEEL WALL MOUNTING BRACKETS. (NOT SHOWN)

COVER IS GASKETED.

INDUSTRY STANDARDS:

INDOOR RATED
 UL508 TYPE 1, 2, 4, 4X INDOOR, 12 & 13
 NEMA TYPE 1, 2, 4, 4X, 12 & 13
 IEC529, IP66

OUTDOOR RATED
 UL508 TYPE 1, 2, 4, 4X, 12 & 13
 NEMA TYPE 1, 2, 4, 4X, 12 & 13
 IEC529, IP66

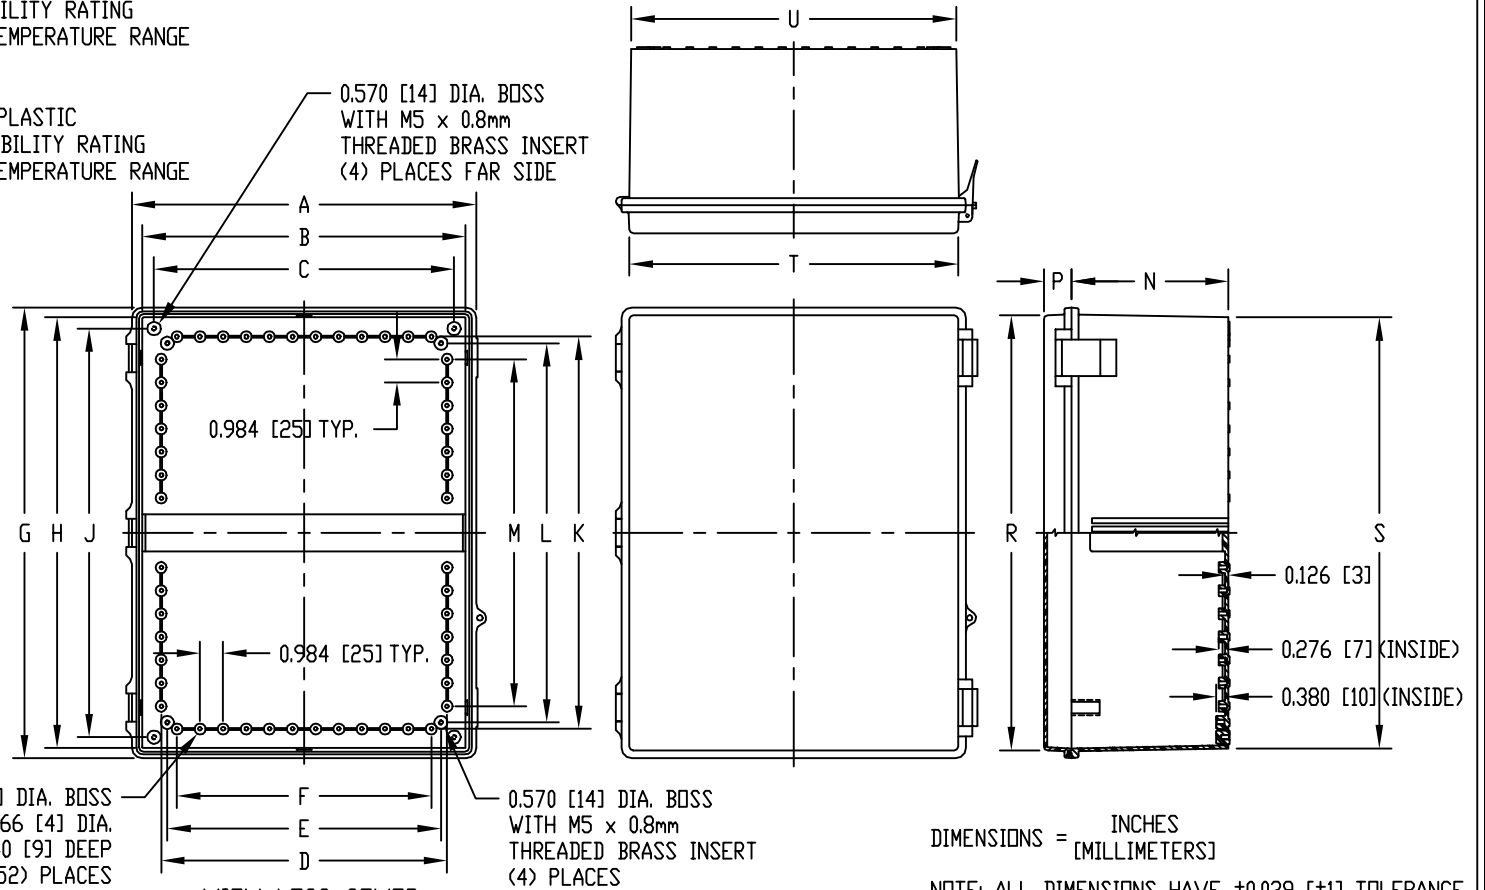

DIMENSIONS = INCHES [MILLIMETERS]

NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE UNLESS OTHERWISE SPECIFIED

INDOOR RATED		OUTDOOR RATED	DIMENSIONS																	
PART NO.		PART NO.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U
SOLID COVER	CLEAR COVER	SOLID COVER																		
NBB-10253	NBB-10273	NBB-15253	14.640 [372]	13.750 [349]	12.768 [324]	12.158 [309]	11.643 [296]	10.824 [275]	19.170 [487]	18.330 [466]	17.392 [442]	16.690 [424]	16.138 [410]	14.760 [375]	6.666 [169]	1.185 [30]	18.500 [470]	18.335 [466]	13.980 [355]	13.810 [351]