


PART NAME NEMA 4X ENCLOSURE

PART No. PN-1344, PN-1344-C AND PN-1344-DG

INDUSTRY STANDARDS:
 POLYCARBONATE (LIGHT GRAY AND CLEAR)
 UL 94V-2 FLAMMABILITY RATING (UL FILE #E41613)
 UV STABILIZED
 SERVICE TEMPERATURE RANGE: -40°C TD +120°C
 ABS (DARK GRAY)
 UL 94-HB FLAMMABILITY RATING (UL FILE #E56070)
 SERVICE TEMPERATURE RANGE: -40°C TD +80°C

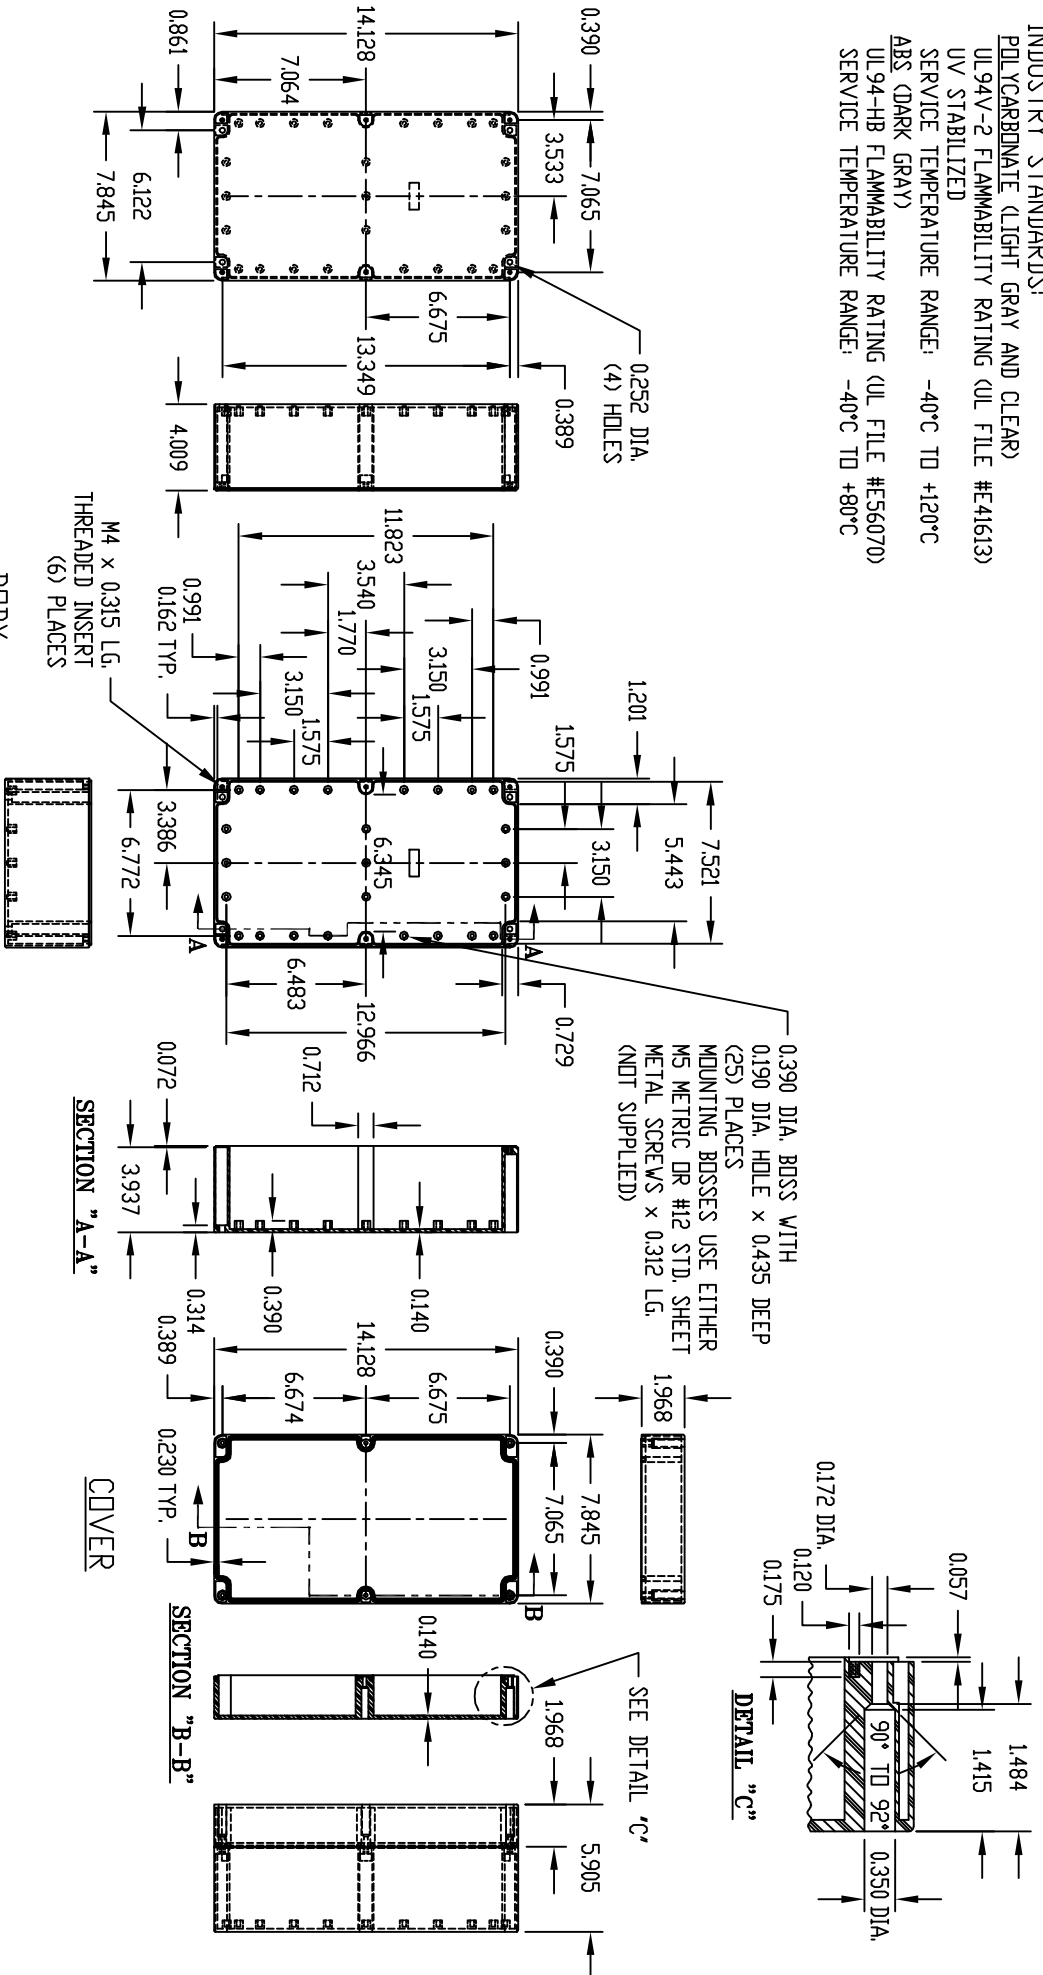

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

| PART NUMBER | MATERIAL | | FINISH | | HARDWARE KIT |
|-------------|-----------------|-----------------|------------|------------|---|
| | BODY | COVER | BODY | COVER | |
| PN-1344 | POLYCARBONATE | POLYCARBONATE | LIGHT GRAY | LIGHT GRAY | KIT CONTAINS (6) M4 x 25mm (1.000") LG. SCREWS FOR ASSEMBLY |
| PN-1344-C | POLYCARBONATE | POLYCARBONATE | LIGHT GRAY | CLEAR | |
| PN-1344-DG | HIGH-IMPACT ABS | HIGH-IMPACT ABS | DARK GRAY | DARK GRAY | |