


Distributed by:

**JAMECO<sup>®</sup>**  
**ELECTRONICS**

[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached  
material are the property of its owner.

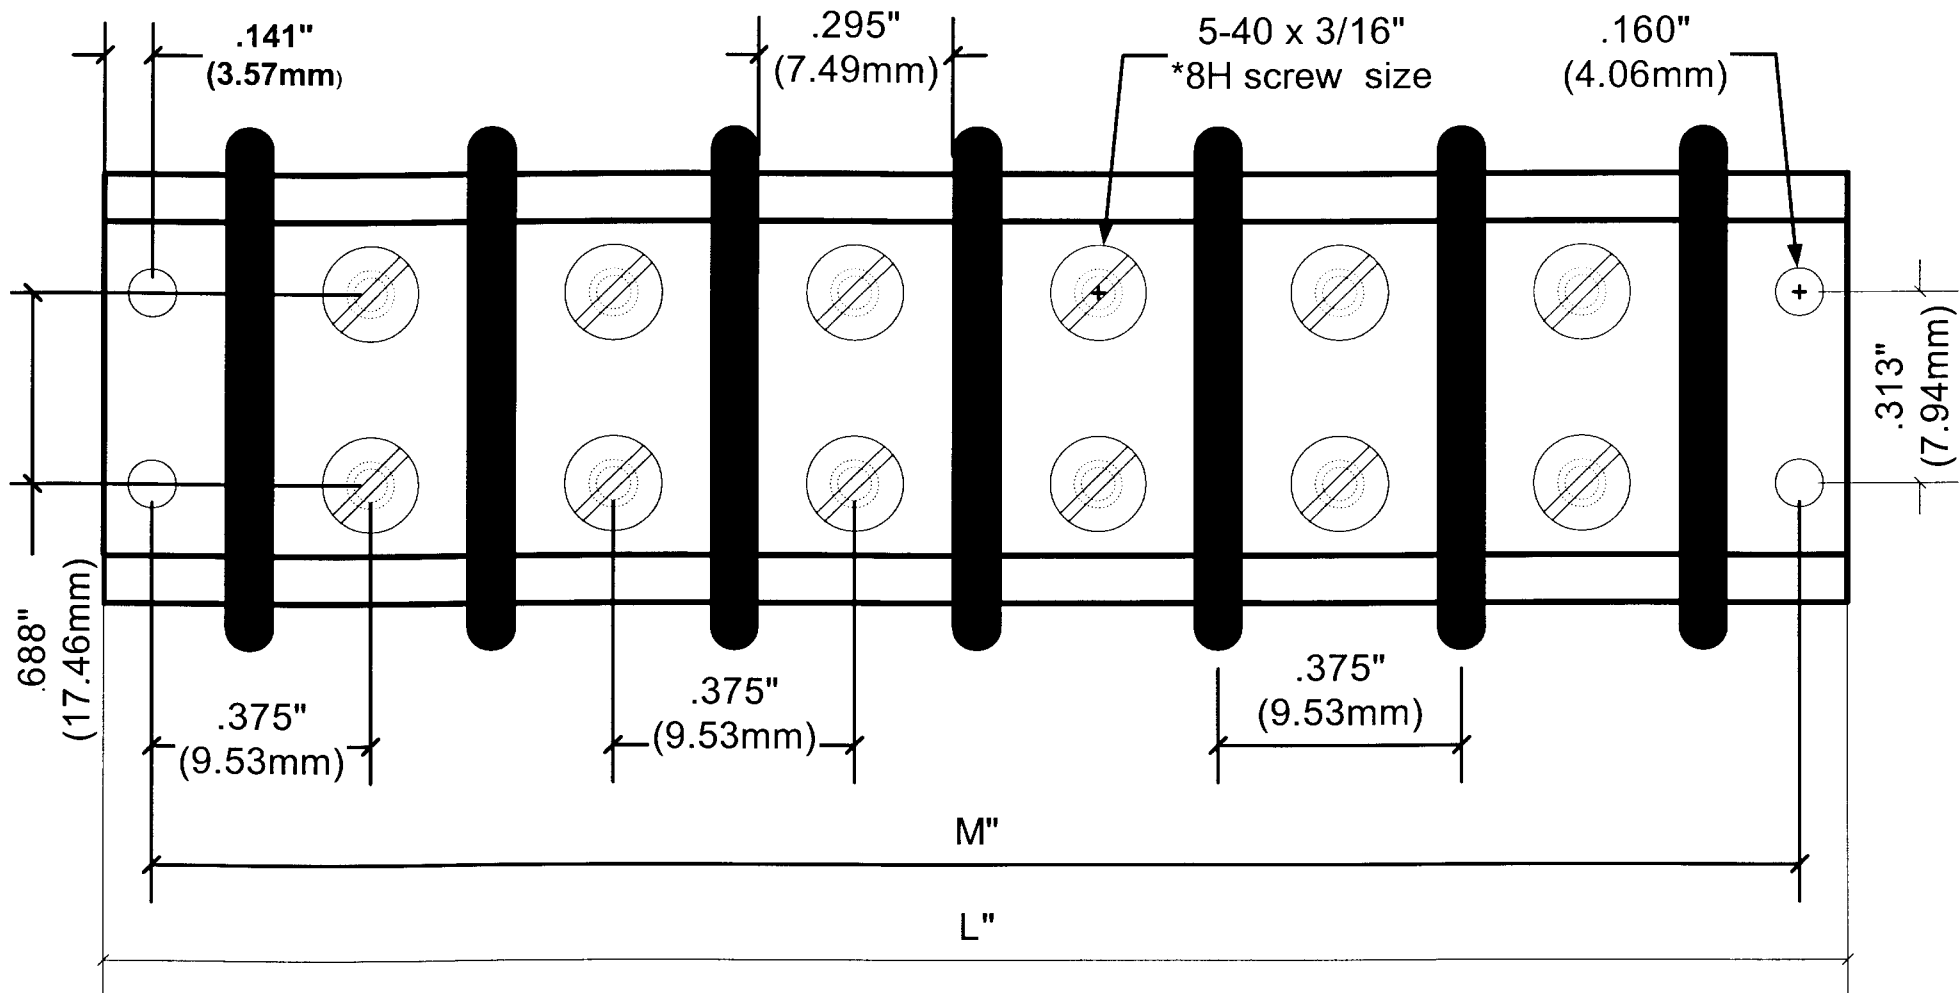

**Electrical Characteristics:**

Voltage rating: 250VAC RMS max.  
 Current rating: 15A max.  
 Max. Watts per terminal: 3750

**Mechanical Characteristics:**

Max. wire size: 16AWG  
 Recommended tightening torque: 9 in/lb

**Environmental Characteristics:**

Operating Temp: -55 to +300 degrees F  
 Certifications: UL - File E61245;  
 CSA - LR 31996

**Materials:**

**Insulation material:** molded monoblock, general purpose phenolic, black, UR rated 94V-1  
**Eyelets:** material - brass  
 Plating: nickel  
**Screws:** material - steel  
 Plating: nickel over copper flash  
**Solder terminals:** material - brass  
 Plating: electro tin  
**Marker strip material:** Nema grade XPC, UL rated 94V-0

**Dimensions:**

| Positions | M     | L     |
|-----------|-------|-------|
| 2         | 1.125 | 1.407 |
| 3         | 1.500 | 1.782 |
| 4         | 1.875 | 2.157 |
| 5         | 2.250 | 2.532 |
| 6         | 2.625 | 2.907 |
| 7         | 3.000 | 3.282 |
| 8         | 3.375 | 3.657 |
| 9         | 3.750 | 4.032 |
| 10        | 4.125 | 4.407 |
| 12        | 4.875 | 5.157 |

DESCRIPTION

**Series 140**  
**.375" Density, 5-40 x 3/16"**  
**BH Screw, Open Bottom**  
**Double Row**