


Distributed by:

**JAMECO<sup>®</sup>**  
**ELECTRONICS**

[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached  
material are the property of its owner.

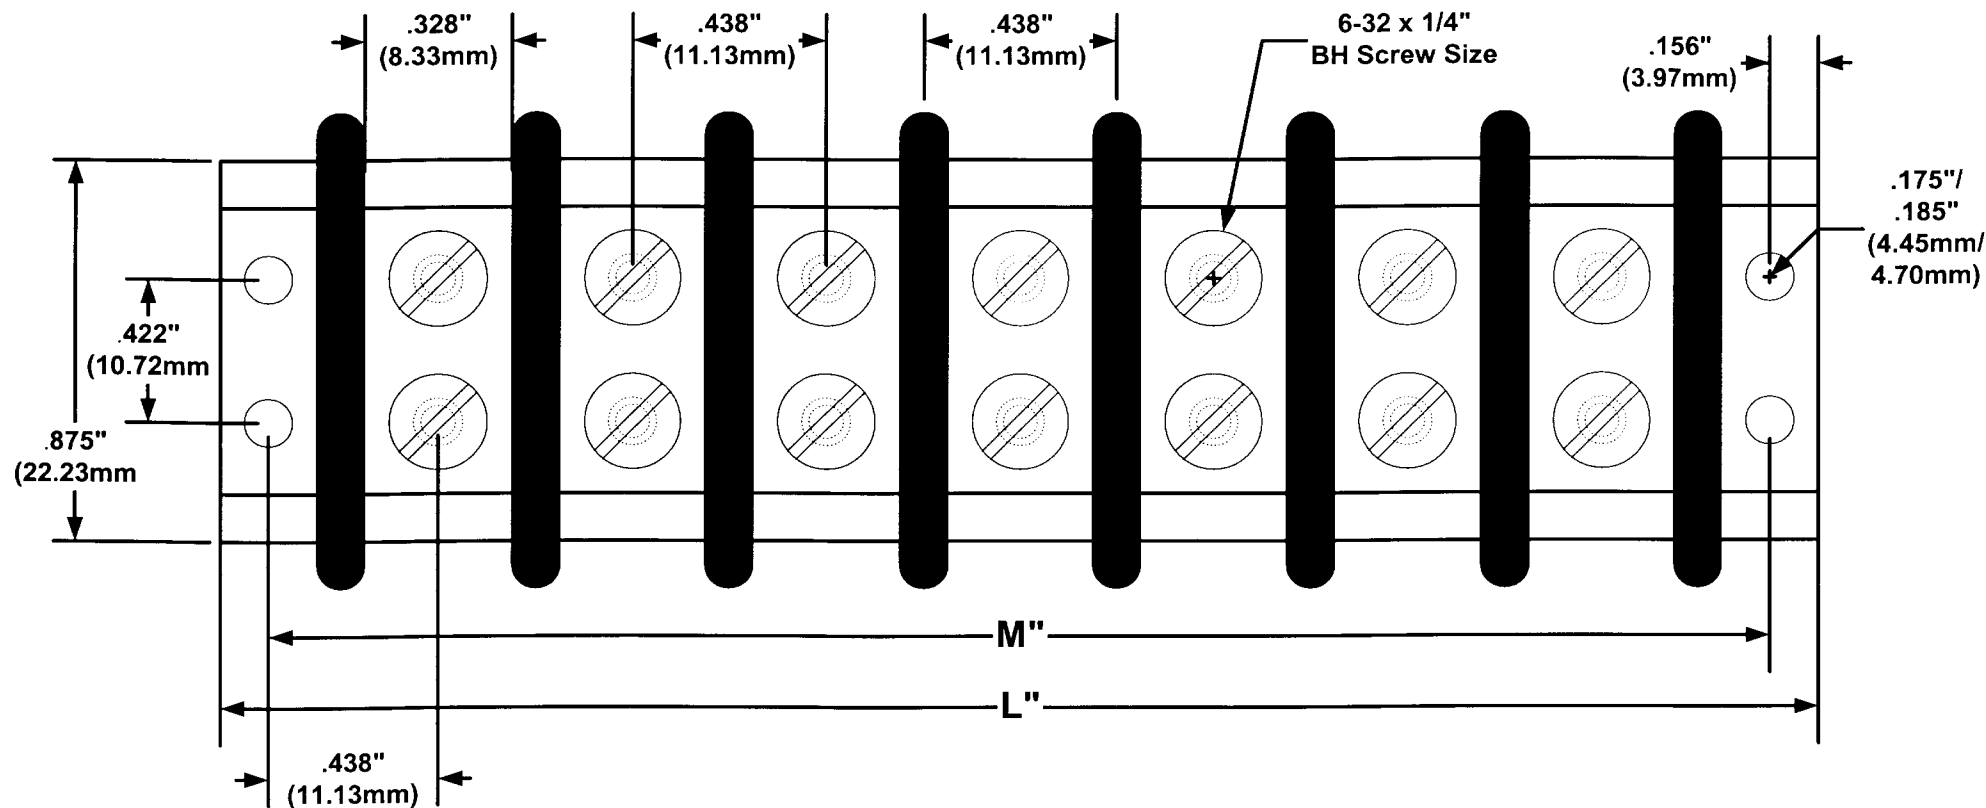

**Electrical Characteristics:**

Voltage rating: 250VAC RMS maximum  
 Current rating: 20A maximum  
 Maximum watts per terminal: 5000Watts

**Mechanical Characteristics:**

Maximum wire size: 14AWG  
 Recommended tightening torque: 12 lb./in.

**Materials:**

Insulation material: molded monoblock, general purpose phenolic, black, UL rated 94V-1  
 Eyelets: material - brass  
 Plating: nickel  
 Screws: material - steel  
 Plating: nickel over copper flash  
 Solder terminals: material - brass  
 Plating: electro-tin  
 Marker strip material: Nema grade XPC, UL rated 94V-0

**Environmental:**

Operating temperature: -55 to +300 degrees F  
 Certifications: UL - file E61245; CSA - LR31996

**Positions**

2  
3  
4  
5  
6  
7  
8  
9  
10  
12

**M**

1.312"  
1.750"  
2.187"  
2.625"  
3.062"  
3.500"  
3.938"  
4.375"  
4.813"  
5.687"

**L**

1.625"  
2.062"  
2.500"  
2.938"  
3.375"  
3.812"  
4.250"  
4.687"  
5.125"  
6.000"

DESCRIPTION
<p><b>Series 141</b>  <b>.438" Density, 6-32 x 1/4"</b>  <b>BH Screw, Open Bottom</b>  <b>Double Row</b></p>