


Distributed by:

**JAMECO<sup>®</sup>**  
**ELECTRONICS**

[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached  
material are the property of its owner.

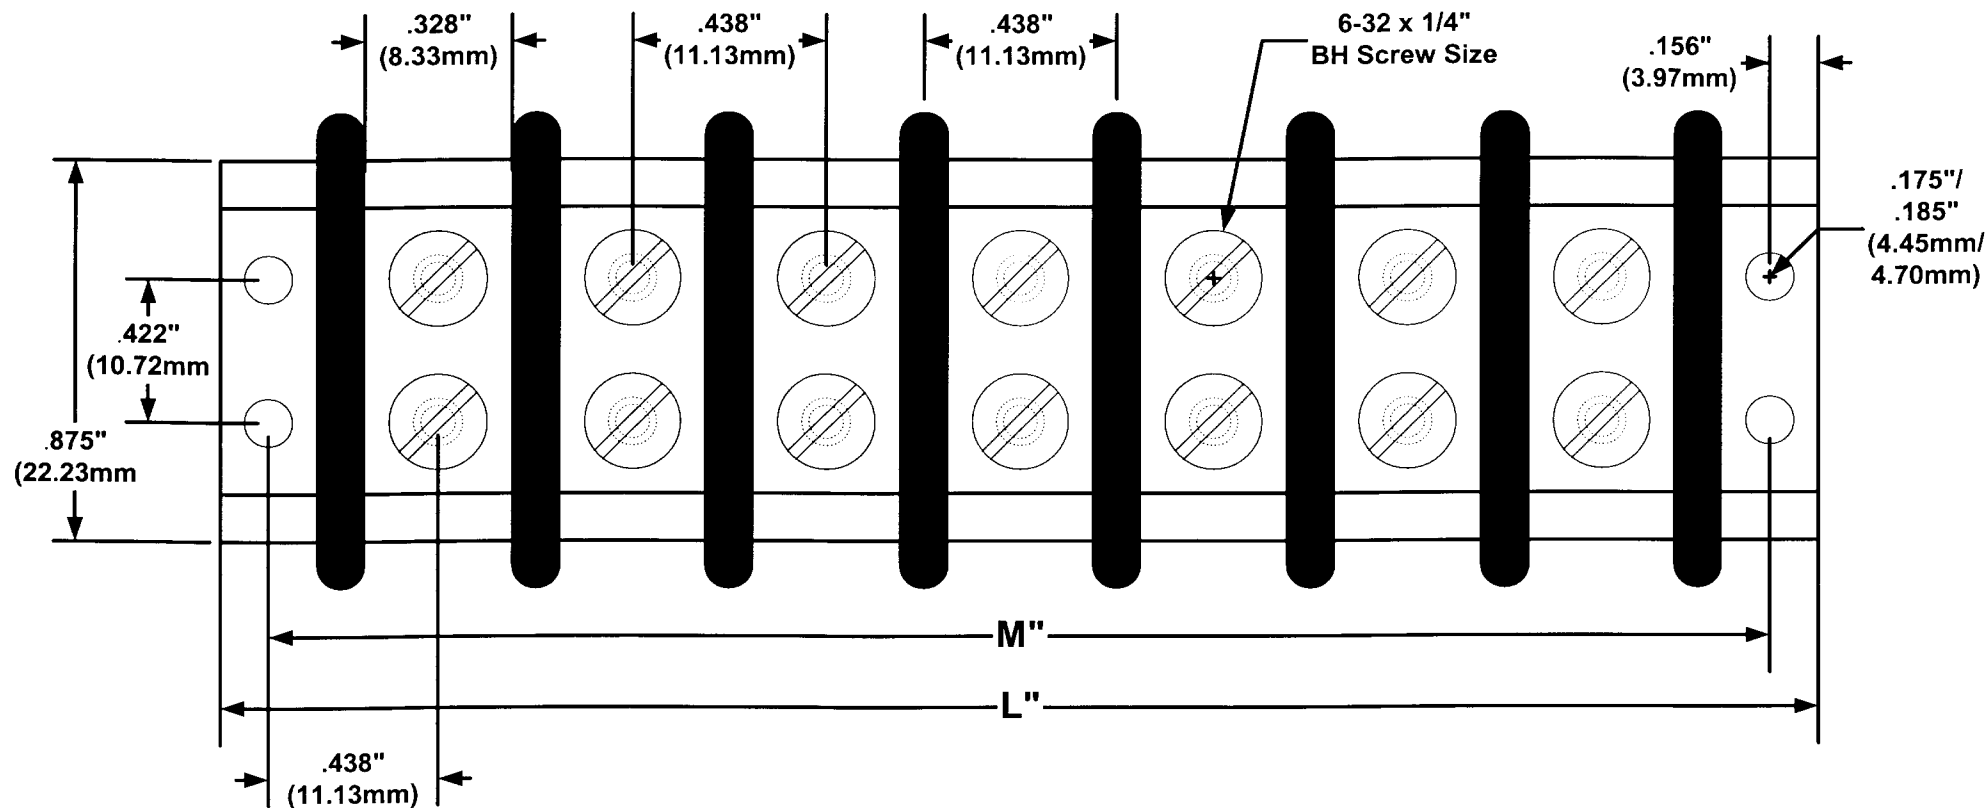

**Electrical Characteristics:**

Voltage rating: 250VAC RMS maximum  
 Current rating: 20A maximum  
 Maximum watts per terminal: 5000Watts

**Mechanical Characteristics:**

Maximum wire size: 14AWG  
 Recommended tightening torque: 12 lb./in.

**Materials:**

Insulation material: molded monoblock, general purpose phenolic, black, UL rated 94V-1  
 Eyelets: material - brass  
 Plating: nickel  
 Screws: material - steel  
 Plating: nickel over copper flash  
 Solder terminals: material - brass  
 Plating: electro-tin  
 Marker strip material: Nema grade XPC, UL rated 94V-0

**Environmental:**

Operating temperatureL -55 to +300 degrees F  
 Certifications: UL - file E61245; CSA - LR31996

**Positions**

Positions	M	L
2	1.312"	1.625"
3	1.750"	2.062"
4	2.187"	2.500"
5	2.625"	2.938"
6	3.062"	3.375"
7	3.500"	3.812"
8	3.938"	4.250"
9	4.375"	4.687"
10	4.813"	5.125"
12	5.687"	6.000"

DESCRIPTION  
**Series 141**  
**.438" Density, 6-32 x 1/4"**  
**BH Screw, Open Bottom**  
**Double Row**