


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

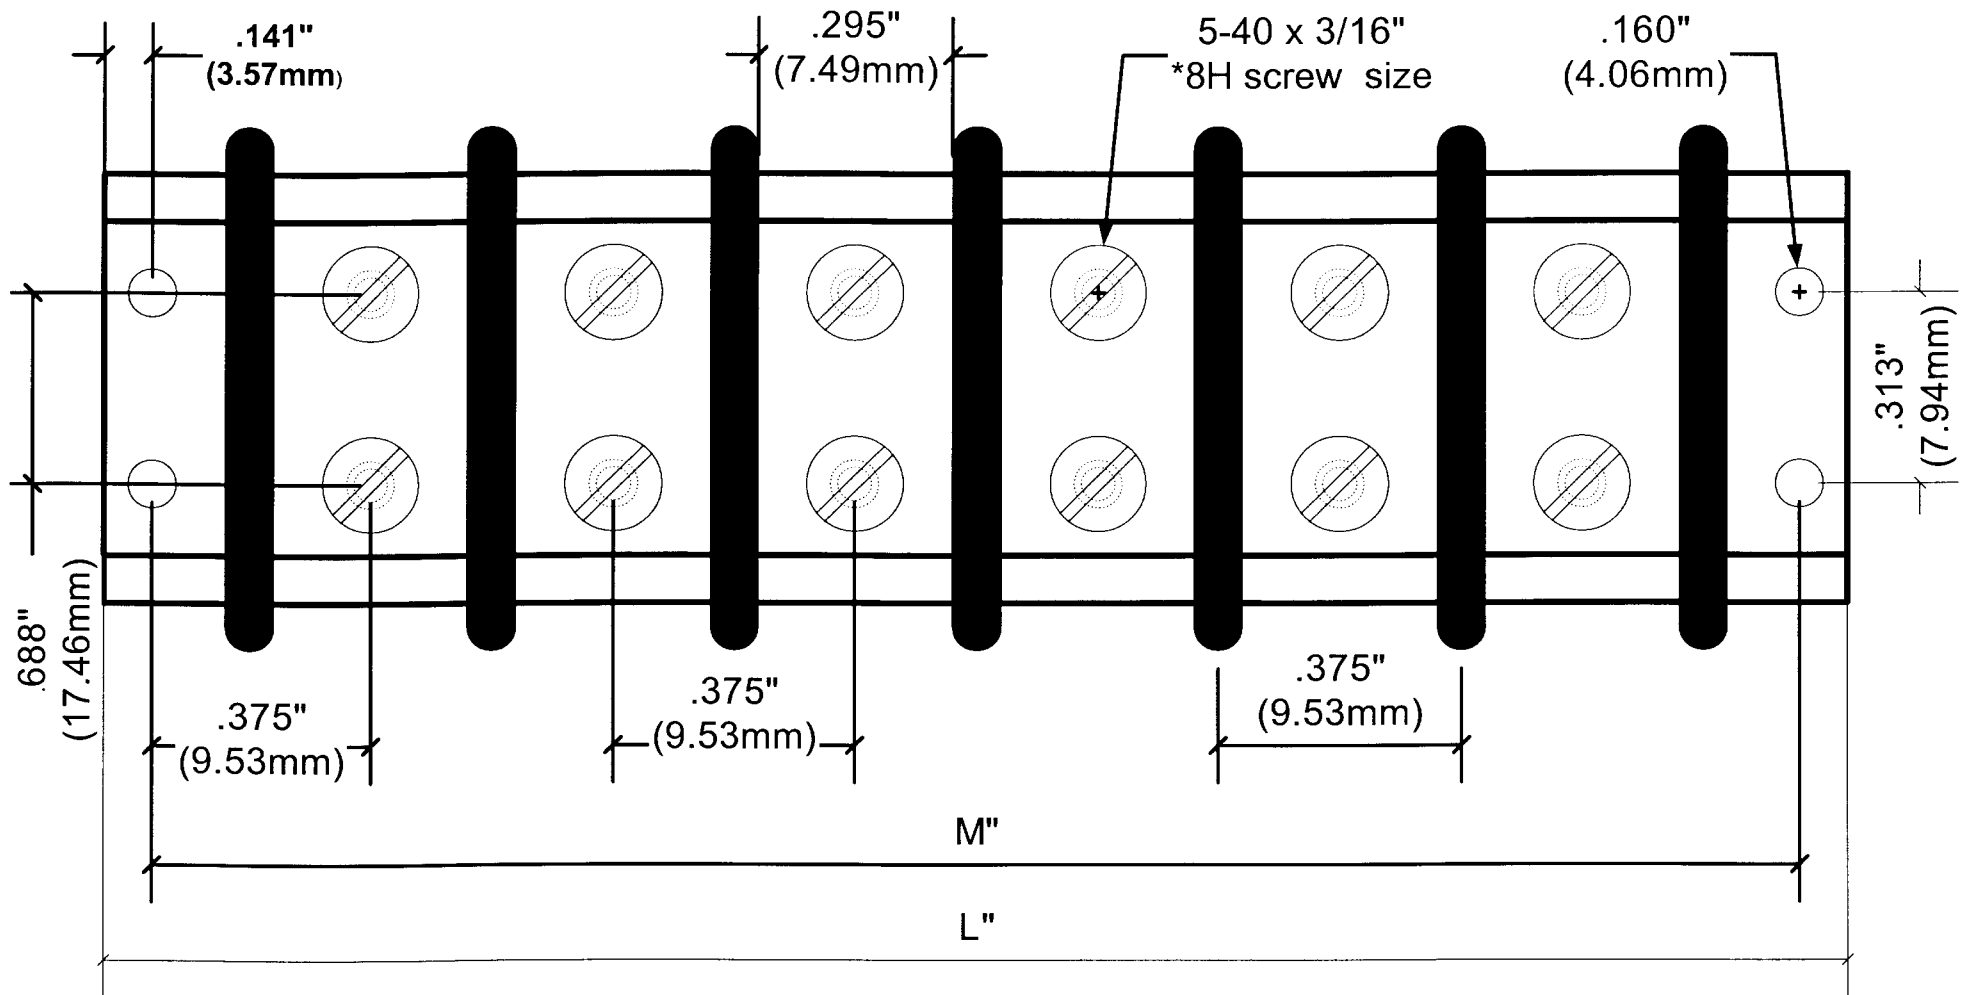

Electrical Characteristics:

Voltage rating: 250VAC RMS max.
 Current rating: 15A max.
 Max. Watts per terminal: 3750

Mechanical Characteristics:

Max. wire size: 16AWG
 Recommended tightening torque: 9 in/lb

Environmental Characteristics:

Operating Temp: -55 to +300 degrees F
 Certifications: UL - File E61245;
 CSA - LR 31996

Materials:

Insulation material: molded monoblock, general purpose phenolic, black, UR rated 94V-1
Eyelets: material - brass
 Plating: nickel
Screws: material - steel
 Plating: nickel over copper flash
Solder terminals: material - brass
 Plating: electro tin
Marker strip material: Nema grade XPC, UL rated 94V-0

Dimensions:

Positions	M	L
2	1.125	1.407
3	1.500	1.782
4	1.875	2.157
5	2.250	2.532
6	2.625	2.907
7	3.000	3.282
8	3.375	3.657
9	3.750	4.032
10	4.125	4.407
12	4.875	5.157

DESCRIPTION

Series 140
.375" Density, 5-40 x 3/16"
BH Screw, Open Bottom
Double Row