


1227.6

TKS 4/3/F GR

TKS 4/3/F GR

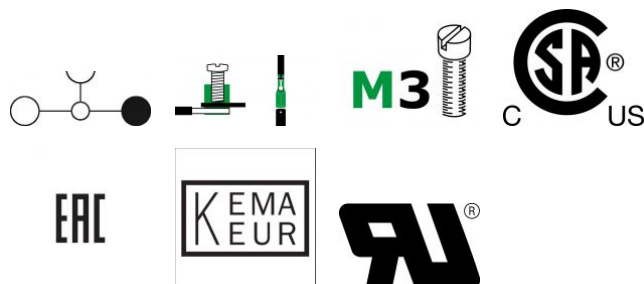

Transformer terminal, Screw connection + spade connection Mounting type: Custom profile, Rated cross-section: 4 mm², Width: 22.5 mm, Colour: Grey

Business data

Product description	Transformer terminal
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	15
Weight per piece (including packaging)	15.4
Unit of weight	G
Customs number	85369010
Country of origin	DE

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Technical Data

Dimensions

Length	27.7 mm
--------	---------

Width	22.5 mm
-------	---------

Height	33.1 mm
--------	---------

Ratings

Rated voltage	800 V
---------------	-------

Rated current	32 A
---------------	------

Rated cross-section	4 mm ²
---------------------	-------------------

Rated impulse voltage	8 kV
-----------------------	------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Technical Data

Connection data

Connection principle	Screw connection + spade connection
Connections	6
Spade connection	6,3/2 x 2,8 x 0,8 mm
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	6 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	6 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	9 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-0
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Custom profile
---------------	----------------

Gauge plug acc. to EN 60 947-1	A4
--------------------------------	----

Number of test pick-off options	3
---------------------------------	---

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup B: rated voltage	600 V
-------------------------------	-------

CSA Usegroup B: rated current	30 A
-------------------------------	------

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	30 A
-------------------------------	------

CSA wire cross-section AWG, min.	22
----------------------------------	----

CSA wire cross-section AWG, max.	10
----------------------------------	----

CSA torque, max.	1 Nm
------------------	------

CSA torque, min.	0.5 Nm
------------------	--------

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Approvals

CSAus approval

CSAus approval	UL 1059
CSAus approval granted	✓
CSAus Usegroup B: rated voltage	600 V
CSAus Usegroup B: rated current	27 A
CSAus Usegroup C: rated voltage	600 V
CSAus Usegroup C: rated current	27 A
CSAus wire cross-section AWG, min.	22
CSAus wire cross-section AWG, max.	10
CSAus torque, min.	0.5 Nm
CSAus torque, max.	1 Nm

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	800 V
KEMA rated current	32 A
KEMA rated impulse voltage (fuse holder without electrical components)	8 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	6 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	6 mm ²
KEMA torque, min.	0.5 Nm
KEMA torque, max.	1 Nm

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Approvals

UL Recognized


UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	30 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	30 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	10
UL torque, min.	4.4 Lb In.
UL torque, max.	8.85 Lb In.
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

1227.6


TKS 4/3/F GR

TKS 4/3/F GR

Media

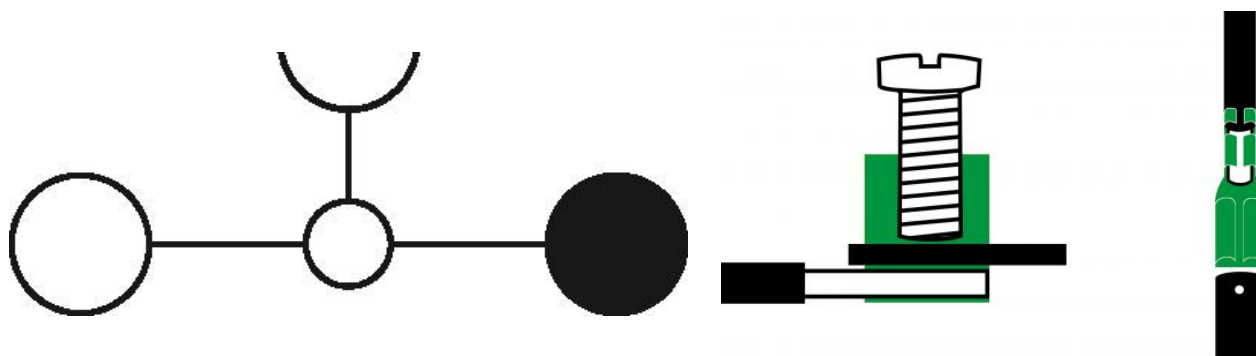

M3



EAC



1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Media



1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Accessories


Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 7.5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3327.7	PMC SB 7,5/40 So WH	4044211128845	400 PC



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 7.5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9326.7	PMC SB 7,5/40 WH	4044211157784	400 PC

1227.6

TKS 4/3/F GR

TKS 4/3/F GR

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC
